



**Model number**

**VBA-4E4A-CB10-ZEJ/E0J-FL**

Printed circuit board module  
4 inputs/4 outputs

**Features**

- Integrated communication monitoring function
- Outputs short-circuit and overload proof
- Supply of the inputs and the outputs from AS-Interface
- Function display for bus, inputs and outputs
- Connection via lead

**Function**


The AS-Interface connecting module is ideal for integrating custom electronics, such as illuminated pushbuttons or LED lights. The PCB is supplied with power entirely via AS-Interface. The inputs and outputs are resistant to short circuits and overloading. The display and control elements and AS-Interface are connected via cable strands.

A signal indicating an overload of the outputs is transmitted to the AS-Interface master via the "peripheral fault" function. The communication via AS-Interface remains unaffected.


**Note:**

A communication monitoring function is integrated into the system. This function disconnects the outputs from the power supply when no communication is taking place on the AS-Interface line.

**Dimensions**

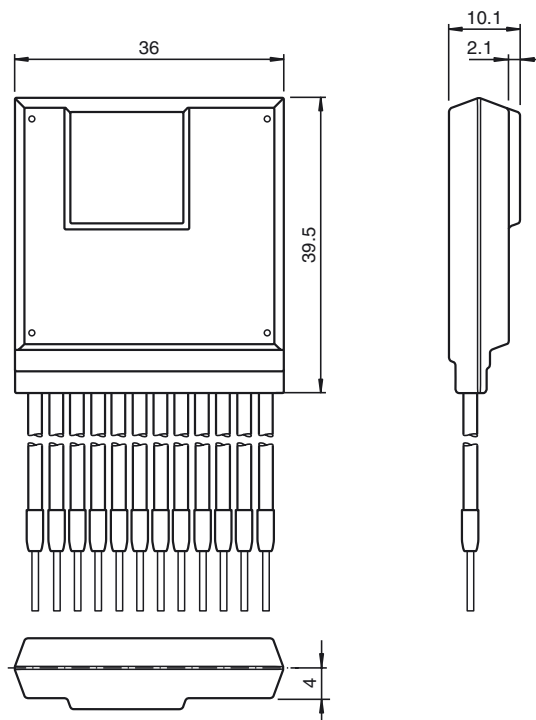


**Electrical connection**

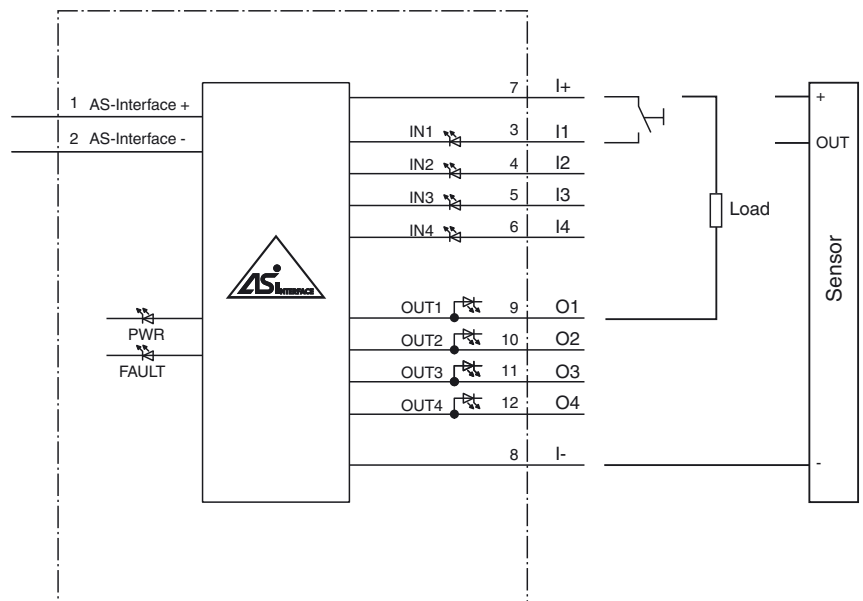

Release date: 2018-12-03 11:28 Date of issue: 2018-12-03 324473\_eng.xml

## Indicating / Operating means

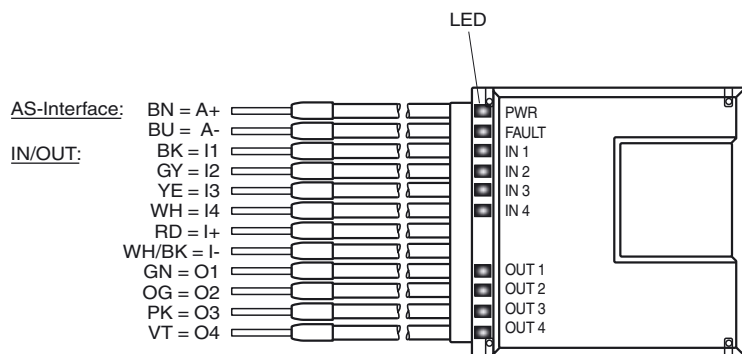

## Technical data

### General specifications

Slave type	A/B slave
AS-Interface specification	V3.0
Required master specification	≥ V3.0
UL File Number	E223772
MTBF	267 a

### Indicators/operating means

LED FAULT	error display; LED red red: communication error or address is 0 red flashing: overload of outputs
LED PWR	AS-Interface voltage; green LED green: voltage OK flashing green: address 0
LED IN	switching state (input); 4 LED yellow
LED OUT	Switching state (output); 4 LED yellow

### Electrical specifications

Rated operating voltage	$U_e$	26.5 ... 31.6 V from AS-Interface (PELV)
Rated operating current	$I_e$	≤ 40 mA (without inputs/outputs)/max. 160 mA
Protection class		III
Surge protection		$U_e$ : overvoltage category II, safe isolated power supplies (PELV)

### Input

Number/Type	4 inputs for mechanical contacts or 3-wire sensors (PNP), DC
Supply	from AS-Interface
Voltage	12 ... 31 V
Current loading capacity	≤ 100 mA Total including output current, overload and short-circuit proof
Input current	≤ 4 mA (limited internally)
Switching point	
0 (unattenuated)	≤ 0.15 mA
1 (attenuated)	≥ 1.3 mA
Signal delay	< 1 ms (input/AS-Interface)

### Output

Number/Type	4 electronic outputs, NPN, overload proof and short-circuit proof
Supply	from AS-Interface
Current	≤ 100 mA per output, ≤ 100 mA in total, including input supply
Voltage	12 ... 31 V
Usage category	DC-1 "general use" (ohmic and weak inductive loads in accordance with IEC 60947)

### Directive conformity

Electromagnetic compatibility	
Directive 2014/30/EU	EN 62026-2:2013

### Standard conformity

Degree of protection	EN 60529:2000
Fieldbus standard	EN 62026-2:2013
Emitted interference	EN 61000-6-4:2007
AS-Interface	EN 62026-2:2013
Noise immunity	EN 61000-6-2:2005, EN 61326-1:2006, EN 62026-2:2013

### Programming instructions

Profile	S-7.A.7
IO code	7
ID code	A

ID1 code	7	
ID2 code	7	
<b>Data bits</b> (function via AS-Interface)	<b>input</b>	<b>output</b>
D0	IN1	OUT1
D1	IN2	OUT2
D2	IN3	OUT3
D3	IN4	OUT4
<b>Parameter bits</b> (programmable via AS-i)	<b>function</b>	
P0	not used	
P1	Input filter P1 = 0 input filter on, pulse suppression $\leq 2$ ms P1 = 1 input filter off (default settings)	
P2	Synchronous mode P2 = 0 synchronous mode on P2 = 1 synchronous mode off (default settings)	
P3	not used	
<b>Ambient conditions</b>		
Ambient temperature	-25 ... 70 °C (-13 ... 158 °F)	
Storage temperature	-25 ... 85 °C (-13 ... 185 °F)	
Relative humidity	85 % , noncondensing	
Climatic conditions	For indoor use only	
Altitude	$\leq 2000$ m above MSL	
Shock and impact resistance	30 g, 11 ms in 6 spatial directions, 3 shocks 10 g, 16 ms in 6 spatial directions, 1000 shocks	
Vibration resistance	0.35 mm 10 ... 57 Hz , 5 g, 57 Hz ... 150 Hz, 10 cycles	
Pollution degree	2	
<b>Mechanical specifications</b>		
Degree of protection	IP20 according to EN 60529	
Connection	200 mm, PVC cable 0.5 mm <sup>2</sup>	
<b>Material</b>		
Housing	Polyamide hot-melt adhesive	
Mass	33 g	
Note	This device is maintenance-free. If the device is used in a manner not specified by the manufacturer, the protection provided by the device may be impaired.	
<b>Approvals and certificates</b>		
UL approval	Protection class IP20 is not included in the UL approval. The protection class is tested by Pepper+Fuchs.	

### Notes

Do not connect inputs and outputs, which are supplied via the module from AS-interface or via auxiliary power, with power supply and signal circuits with external potentials.