

# Terminal cable


## ICZ-2T/TR-0,2M-PUR ABG-V15B-G



- Labelling cover
- Screen put on the coupling nut and Pin 5
- Data transmission up to 12 MBaud

Terminal cable for PROFIBUS with terminal resistor

### Dimensions

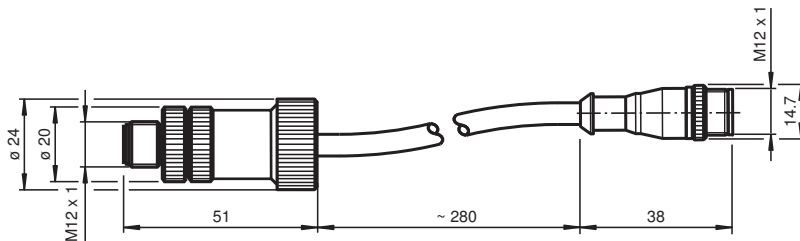

### Technical Data

General specifications	
Number of pins	2 + 1 x screen
Transfer rate	max. 12 MBit/s
Ambient conditions	
Ambient temperature	-40 ... 85 °C (-40 ... 185 °F)
Mechanical specifications	
Degree of protection	IP65
Connection	4-pin M12 connector/socket, B-coded for PROFIBUS
Material	
Contacts	CuZn, gold-plated
Body	PUR / PA 66
Cable	PUR
Slotted nut	CuZn, nickel-plated
Cable	
Sheath diameter	Ø 8 mm
Color	violet

Release date: 2020-03-23 Date of issue: 2020-03-27 Filename: 181499\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS

**Technical Data**

Cores		2 x 0.64 mm <sup>2</sup>
Length	L	approx. 28 cm
Mass		approx. 90 g

**Connection**

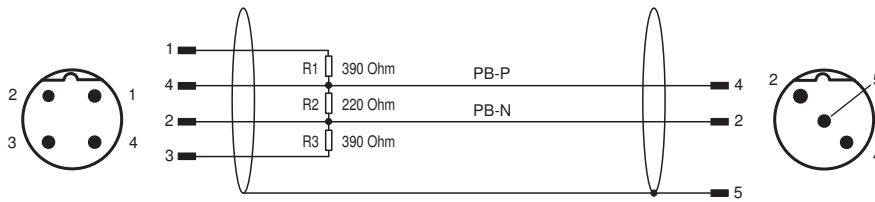

Release date: 2020-03-23 Date of issue: 2020-03-27 Filename: 181499\_eng.pdf