


Inductive sensor


NCN8-18GM40-N0-5M



- 8 mm non-flush
- Stainless steel housing
- Usable up to SIL 2 acc. to IEC 61508

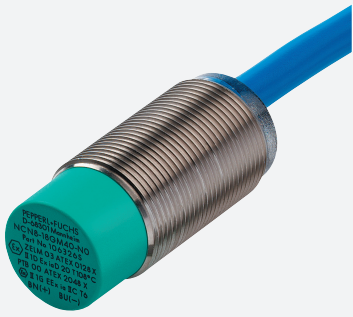

Dimensions



Technical Data

General specifications

Switching function		Normally closed (NC)
Output type		NAMUR
Rated operating distance	s_n	8 mm
Installation		non-flush
Assured operating distance	s_a	0 ... 6.48 mm
Actual operating distance	s_r	7.2 ... 8.8 mm typ. 8 mm
Reduction factor r_{AI}		0.42
Reduction factor r_{Cu}		0.4
Reduction factor r_{304}		0.72
Output type		2-wire

Nominal ratings

Nominal voltage	U_o	8 V
-----------------	-------	-----

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 181116_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com

Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Switching frequency	f	0 ... 300 Hz
Hysteresis	H	1 ... 15 typ. 5 %
Reverse polarity protection		reverse polarity protected
Short-circuit protection		yes
Current consumption		
Measuring plate not detected		min. 3 mA
Measuring plate detected		≤ 1 mA
Switching state indicator		all direction LED, yellow
Functional safety related parameters		
MTTF _d		2040 a
Mission Time (T _M)		20 a
Diagnostic Coverage (DC)		0 %
Compliance with standards and directives		
Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012
Approvals and certificates		
EAC conformity		TR CU 012/2011
FM approval		
Control drawing		116-0165
UL approval		
Ordinary Location		E87056
Hazardous Location		E501628
Control drawing		116-0452
CSA approval		cCSAus Listed, General Purpose
CCC approval		CCC approval / marking not required for products rated ≤36 V
Ambient conditions		
Ambient temperature		-25 ... 100 °C (-13 ... 212 °F)
Storage temperature		-40 ... 100 °C (-40 ... 212 °F)
Mechanical specifications		
Connection type		cable PVC , 5 m
Core cross-section		0.75 mm ²
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		PBT
Degree of protection		IP67
Cable		
Cable diameter		6 mm ± 0.2 mm
Bending radius		> 10 x cable diameter
Equipment protection level Ga		
CE marking		[*PD-Z02585A*]
ATEX marking		⊕ II 1G Ex ia IIC T6...T1 Ga The Ex-related marking can also be printed on the enclosed label.
Standards		EN 60079-0:2012+A11:2013 EN 60079-11:2012 Ignition protection "Intrinsic safety" Use is restricted to the following stated conditions
Appropriate type		NCN8-18GM...-N0...
Effective internal capacitance	C _i	max. 95 nF ; a cable length of 10 m is considered.
Effective internal inductance	L _i	max. 100 μH ; a cable length of 10 m is considered.
Ambient temperature		Details of the correlation between the type of circuit connected, the maximum permissible ambient temperature, the temperature class, and the effective internal reactance values can be found on the EC-type examination certificate. Note: Use the temperature table for category 1 !!! The 20 % reduction in accordance with EN 1127-1 has already been applied to the temperature table for category 1.
Equipment protection level Gb		

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 181116_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.comUSA: +1 330 486 0001
fa-info@us.pepperl-fuchs.comGermany: +49 621 776 1111
fa-info@de.pepperl-fuchs.comSingapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PEPPERL+FUCHS

Technical Data


CE marking		[*PD-Z02585A*]
ATEX marking		⊕ II 1G Ex ia IIC T6...T1 Ga The Ex-significant identification is on the enclosed adhesive label
Standards		EN 60079-0:2012+A11:2013 EN 60079-11:2012 Ignition protection "Intrinsic safety" Use is restricted to the following stated conditions
Appropriate type		NCN8-18GM...-N0...
Effective internal capacitance	C_i	max. 95 nF ; a cable length of 10 m is considered.
Effective internal inductance	L_i	max. 100 μ H ; a cable length of 10 m is considered.
Maximum permissible ambient temperature	T_{amb}	Details of the correlation between the type of circuit connected, the maximum permissible ambient temperature, the temperature class, and the effective internal reactance values can be found on the EC-type examination certificate.
Equipment protection level Gc (ic)		
Certificate		PF 13 CERT 2895 X
CE marking		[*PD-Z02586A*]
ATEX marking		⊕ II 3G Ex ic IIC T6...T1 Gc The Ex-significant identification is on the enclosed adhesive label
Standards		EN 60079-0:2012+A11:2013 EN 60079-11:2012 Ignition protection category "ic" Use is restricted to the following stated conditions
Effective internal capacitance	C_i	max. 95 nF ; a cable length of 10 m is considered.
Effective internal inductance	L_i	max. 100 μ H ; A cable length of 10 m is considered.
Special conditions		
	for $P_i=34$ mW, $I_i=25$ mA, T6	55 °C (131 °F)
	for $P_i=34$ mW, $I_i=25$ mA, T5	55 °C (131 °F)
	for $P_i=34$ mW, $I_i=25$ mA, T4-T1	55 °C (131 °F)
	for $P_i=64$ mW, $I_i=25$ mA, T6	55 °C (131 °F)
	for $P_i=64$ mW, $I_i=25$ mA, T5	55 °C (131 °F)
	for $P_i=64$ mW, $I_i=25$ mA, T4-T1	55 °C (131 °F)
	for $P_i=169$ mW, $I_i=52$ mA, T6	52 °C (125.6 °F)
	for $P_i=169$ mW, $I_i=52$ mA, T5	52 °C (125.6 °F)
	for $P_i=169$ mW, $I_i=52$ mA, T4-T1	52 °C (125.6 °F)
	for $P_i=242$ mW, $I_i=76$ mA, T6	44 °C (111.2 °F)
	for $P_i=242$ mW, $I_i=76$ mA, T5	44 °C (111.2 °F)
	for $P_i=242$ mW, $I_i=76$ mA, T4-T1	44 °C (111.2 °F)
Equipment protection level Gc (nL)		
Standard conformity		EN 60079-15:2005 Ignition protection category "n" Use is restricted to the following stated conditions
Effective internal capacitance C_i		max. 95 nF ; a cable length of 10 m is considered.
Effective internal inductance L_i		max. 100 μ H ; A cable length of 10 m is considered.
General		The apparatus has to be operated according to the appropriate data in the data sheet and in this instruction manual. The data stated in the data sheet are restricted by this operating instruction! The special conditions must be observed! The ATEX Directive applies only to the use of apparatus under atmospheric conditions. If you use the device outside atmospheric conditions, consider that the permissible safety parameters should be reduced.
Special conditions		
	for $P_i=34$ mW, $I_i=25$ mA, T6	55 °C (131 °F)
	for $P_i=34$ mW, $I_i=25$ mA, T5	55 °C (131 °F)
	for $P_i=34$ mW, $I_i=25$ mA, T4-T1	55 °C (131 °F)
	for $P_i=64$ mW, $I_i=25$ mA, T6	55 °C (131 °F)
	for $P_i=64$ mW, $I_i=25$ mA, T5	55 °C (131 °F)
	for $P_i=64$ mW, $I_i=25$ mA, T4-T1	55 °C (131 °F)
	for $P_i=169$ mW, $I_i=52$ mA, T6	52 °C (125.6 °F)
	for $P_i=169$ mW, $I_i=52$ mA, T5	52 °C (125.6 °F)
	for $P_i=169$ mW, $I_i=52$ mA, T4-T1	52 °C (125.6 °F)
	for $P_i=242$ mW, $I_i=76$ mA, T6	44 °C (111.2 °F)

Release date: 2020-03-25 Date of issue: 2020-03-30 Filename: 181116_eng.pdf


Technical Data

for $P_i=242$ mW, $I_i=76$ mA, T5		44 °C (111.2 °F)
for $P_i=242$ mW, $I_i=76$ mA, T4-T1		44 °C (111.2 °F)
Equipment protection level Da		
CE marking		[*PD-Z02585A*]
ATEX marking		Ⓜ II 1D Ex ia IIIc T135°C Da The Ex-related marking can also be printed on the enclosed label.
Standards		EN 60079-0:2012+A11:2013 EN 60079-11:2012 Ignition protection "Intrinsic safety" Use is restricted to the following stated conditions
Appropriate type		NCN8-18GM...-N0...
Effective internal capacitance	C_i	max. 95 nF ; a cable length of 10 m is considered.
Effective internal inductance	L_i	max. 100 µH ; a cable length of 10 m is considered.
Maximum permissible ambient temperature	T_{amb}	Details of the correlation between the type of circuit connected, the maximum permissible ambient temperature, the surface temperature, and the effective internal reactance values can be found on the EC-type-examination certificate. The maximum permissible ambient temperature of the data sheet must be noted, in addition, the lower of the two values must be maintained.
Equipment protection level Dc (tc)		
CE marking		[*PD-Z02585A*]
ATEX marking		Ⓜ II 3D Ex tc IIIc T80°C Dc The Ex-related marking can also be printed on the enclosed label.
Standards		EN 60079-0:2012+A11:2013, EN 60079-31:2014 Protection by enclosure "tc" Some of the information in this instruction manual is more specific than the information provided in the datasheet.
General		The corresponding datasheets, declarations of conformity, EC-type examination certificates, certifications, and control drawings, where applicable (see datasheets), form an integral part of this document. These documents can be found at www.pepperl-fuchs.com . The maximum surface temperature of the device was determined without a layer of dust on the apparatus. Some of the information in this instruction manual is more specific than the information provided in the datasheet.
Special conditions		
Maximum permissible ambient temperature T_{Umax}		Values can be obtained from the following list, depending on the max. operating voltage U_b max and the minimum series resistance R_v .
at $U_{Bmax}=9$ V, $R_v=562$ Ω		61 °C (141.8 °F)
using an amplifier in accordance with EN 60947-5-6		61 °C (141.8 °F)
General information		
Use in the hazardous area		see instruction manuals
Category		1G; 2G; 3G; 1D; 3D

Connection



Accessories

	BF 18	Mounting flange, 18 mm
---	--------------	------------------------