



Model Number


V1-W-N4-25M-PUR

Female cordset, M12, 4-pin, NAMUR, PUR cable

Features

- Suitable for NAMUR technology
- Blue body and sheathing
- Knurled nut suitable for tool assembly
- Immunity to vibration, with mechanical latching
- Gold plated contacts
- Degree of protection IP67 / IP68 / IP69K

Dimensions

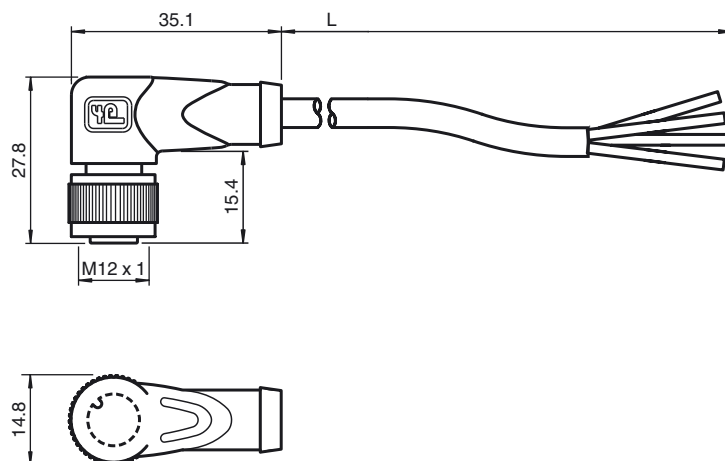

Technical data

General specifications

| | |
|---------------------|-------------|
| Number of pins | 4 |
| Connection 1 | socket |
| Construction type 1 | right angle |
| Threading 1 | M12 |
| Connection 2 | cable end |

Electrical specifications

| | | |
|--------------------|-------|------------------|
| Operating voltage | U_B | max. 250 V AC/DC |
| Operating current | I_B | max. 4 A |
| Contact resistance | | < 10 m Ω |
| Inductance | | 0.55 mH / km |
| Capacitance | | 88.3 nF / km |

Ambient conditions

| | |
|---------------------|---|
| Ambient temperature | Body: -40 ... 90 °C (-40 ... 194 °F) cable -25 ... 100 °C (-13 ... 212 °F) |
|---------------------|---|

| | |
|------------------|---|
| Pollution degree | 3 |
|------------------|---|


Mechanical specifications

| | |
|------------------------|---|
| Contact elements | spring-loaded contact socket |
| Pin diameter | 1 mm |
| Degree of protection | IP67 / IP68 / IP69K |
| Cable code | Li FY 11Y 4 x 0.34 |
| Material | |
| Contacts | CuSn / Au |
| Contact surface | Au |
| Body | TPU, black |
| Cable | PUR |
| Slotted nut | Diecast zinc |
| Core insulation | PVC |
| Cable | extra-fine wire, flexible |
| Sheath diameter | $\varnothing 4.8$ mm |
| Bending radius | > 15 x cable diameter, moving > 10 x cable diameter, fixed |
| Color | blue |
| Cores | 4 x 0.34 mm ² |
| Conductor construction | 42 x 0.1 mm \varnothing |
| Length | L 25 m |
| Flammability | |
| Contact carrier | 94 HB |
| Housing | 94 V-2 |

Compliance with standards and directives

| | |
|---------------------|--|
| Standard conformity | |
|---------------------|--|

Electrical connection

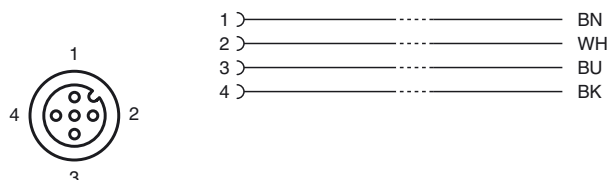



| | |
|----------------------|-----------------|
| Degree of protection | EN 60529 |
| Standards | IEC 61076-2-101 |

Release date: 2019-05-14 15:18 Date of issue: 2019-05-14 220473_eng.xml