

# Terminal resistor ICZ-TR-V1-110R




- For CC-Link dedicated cable
- Immunity to vibration
- M12 round connection for BUS (A-coded)

Terminal resistor for CC-Link

CC-Link **V2**

## Dimensions

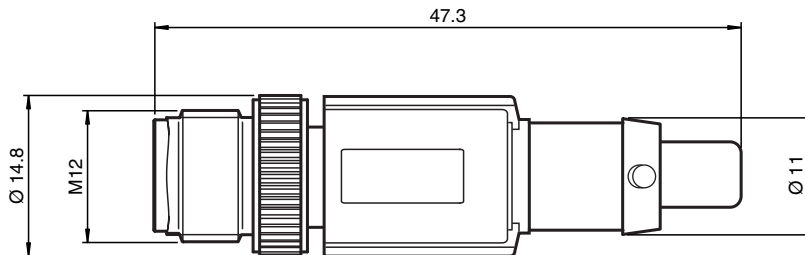

## Technical Data

### General specifications

Number of pins 4

### Electrical specifications

Rated voltage	$U_r$	24 V
Rated current	$I_r$	20 mA at 40 °C
Resistor		$R = 110 \Omega$

### Ambient conditions

Ambient temperature -25 ... 90 °C (-13 ... 194 °F)

### Mechanical specifications

Release date: 2020-03-23 Date of issue: 2020-03-27 Filename: 226898\_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group  
www.pepperl-fuchs.com

USA: +1 330 486 0001  
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111  
fa-info@de.pepperl-fuchs.com


Singapore: +65 6779 9091  
fa-info@sg.pepperl-fuchs.com

**PF** PEPPERL+FUCHS


## Technical Data

Degree of protection	IP65 / IP67 / IP69K
Connection	4-pin M12 connector, for CC-Link
Material	
Contacts	CuZn
Contact surface	Ni/Au
Body	TPU, black

## Connection

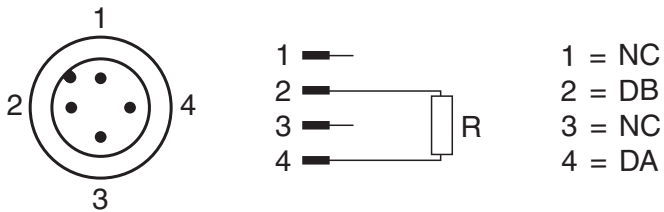

## Accessories

	<b>ICZ-3T-0,3M-PVC-CCL-V1-G</b>	Y connection cable for CC-Link
---	---------------------------------	--------------------------------