

Terminal resistor ICZ-TR-V1-130R




- For CC-Link dedicated high-performance cable
- Immunity to vibration
- M12 round connection for BUS (A-coded)

Terminal resistor for CC-Link

CC-Link **V2**

Dimensions

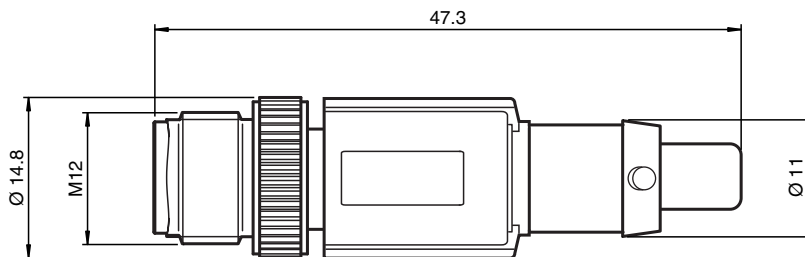

Technical Data

General specifications

Number of pins 4

Electrical specifications

Rated voltage	U_r	24 V
Rated current	I_r	20 mA at 40 °C
Resistor		$R = 130 \Omega$

Ambient conditions

Ambient temperature -25 ... 90 °C (-13 ... 194 °F)

Mechanical specifications

Release date: 2020-03-23 Date of issue: 2020-03-27 Filename: 226899_eng.pdf

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

Pepperl+Fuchs Group
www.pepperl-fuchs.com

USA: +1 330 486 0001
fa-info@us.pepperl-fuchs.com

Germany: +49 621 776 1111
fa-info@de.pepperl-fuchs.com



Singapore: +65 6779 9091
fa-info@sg.pepperl-fuchs.com

PF PEPPERL+FUCHS

Technical Data

Degree of protection	IP65 / IP67 / IP69K
Connection	4-pin M12 connector, for CC-Link
Material	
Contacts	CuZn
Contact surface	Ni/Au
Body	TPU, black

Connection



1 = NC
 2 = DB
 3 = NC
 4 = DA