



Model Number

NCB1,5-8GM25-N0-Y295008

Features

- 1.5 mm flush

Technical Data

General specifications

Rated operating distance	s_n	1.5 mm
Installation		flush
Output polarity		NAMUR
Assured operating distance	s_a	0 ... 1.215 mm
Actual operating distance	s_r	1.35 ... 1.65 mm typ.
Reduction factor r_{Al}		0.3
Reduction factor r_{Cu}		0.2
Reduction factor r_{304}		0.7
Output type		2-wire

Nominal ratings

Nominal voltage	U_o	8.2 V (R_i approx. 1 k Ω)
Switching frequency	f	0 ... 2000 Hz
Hysteresis	H	1 ... 10 typ. 3 %
Reverse polarity protection		reverse polarity protected
Short-circuit protection		yes
Suitable for 2:1 technology		yes , Reverse polarity protection diode not required
Current consumption		
Measuring plate not detected		≥ 3 mA
Measuring plate detected		≤ 1 mA

Functional safety related parameters

MTTF _d		3590 a
Mission Time (T_M)		20 a
Diagnostic Coverage (DC)		0 %

Ambient conditions

Ambient temperature		-25 ... 100 °C (-13 ... 212 °F)
Storage temperature		-40 ... 100 °C (-40 ... 212 °F)

Mechanical specifications

Connection type		cable PVC , 2 m Protective hose L = 30 cm
Connection assembly		Protective hose : stainless steel 1.4301 / AISI 304 screwed connection : MS58 nickel-plated
Core cross-section		0.14 mm ²
Housing material		Stainless steel 1.4305 / AISI 303
Sensing face		LCP
Degree of protection		IP67

General information

Use in the hazardous area		see instruction manuals
---------------------------	--	-------------------------


Compliance with standards and directives

Standard conformity		
NAMUR		EN 60947-5-6:2000 IEC 60947-5-6:1999
Standards		EN 60947-5-2:2007 EN 60947-5-2/A1:2012 IEC 60947-5-2:2007 IEC 60947-5-2 AMD 1:2012


Approvals and certificates

CCC approval		CCC approval / marking not required for products rated ≤ 36 V
--------------	--	--

Dimensions

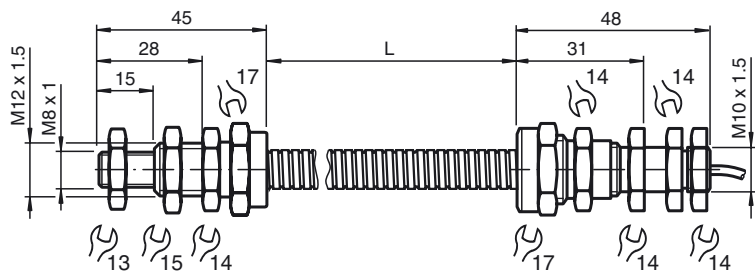

Electrical Connection



Release date: 2017-04-28 13:02 Date of issue: 2017-04-28 295008_eng.xml