

Features



- Sensor for limit value detection in liquids
- Media contacting parts of stainless steel
- Mounting without removing the float (G5 and G6)

Function

The device is a sensor for limit value detection in liquids. A ring magnet integrated in the float activates the contacts inside the probe tube via its magnetic field. If the probe strays outside the range of the mechanical contact, it reverts to the output status.


The skipping of switching points caused by abrupt level changes can be avoided using snap-on set collars on the probe tube. The same set collars are also used for latching contact operation.

Assembly

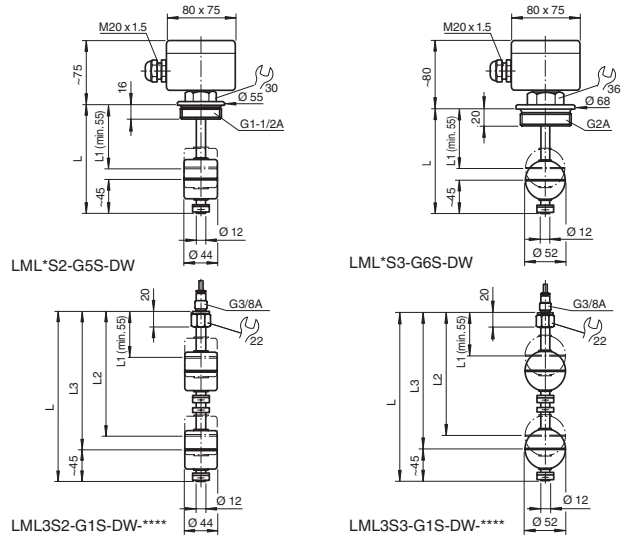

Connection

Change-over contact

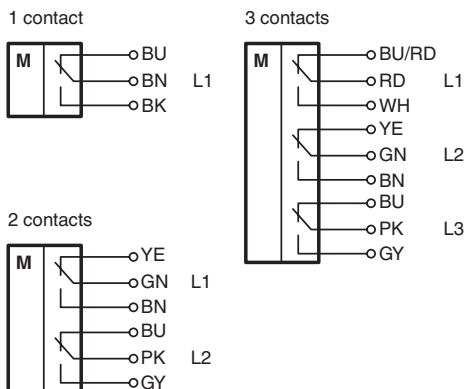

Release date 2020-02-27 09:44 Date of issue 2020-02-27 t3033_eng.xml

Refer to "General Notes Relating to Pepperl+Fuchs Product Information".

General specifications	
Function principle	ring magnet as switching element in the float, reed contact, change-over contact number of contacts: - version LML1: 1 contact - version LML2: 2 contacts - version LML3: 3 contacts
Supply	
Rated voltage U_r	250 V AC/DC
Current consumption	1 A
Power consumption	40 VA
Output	
Connection	This device may be used with any sequential circuit, as long as the circuit can support the electrical circuit values of the switching elements.
Directive conformity	
Low voltage Directive 2014/35/EU	EN 61010-1:2010
Conformity	
Degree of protection	IEC 60529:2000
Operating conditions	
Process conditions	
Process temperature	version LML: -30 ... 150 °C (-22 ... 302 °F) version LML-PVC1: -10 ... 80 °C (14 ... 176 °F)
Process pressure (static pressure)	≤ 25 bar (362.6 psi)
Density	version S2: ≥ 0.8 g/cm ³ version S3: ≥ 0.7 g/cm ³
Ambient conditions	
Ambient temperature	-20 ... 70 °C (-4 ... 158 °F)
Mechanical specifications	
Degree of protection	IP65
Connection	version LML: terminal box, max. 9 terminals version LML-PVC1: connection cable 1 m (3.3 ft), 0.75 mm ²
Material	float, guide tube, process connection: stainless steel 1.4571/316Ti connection cable: PVC terminal box: aluminum die-casting
Dimensions	float: - version S2: cylinder Ø44 mm x 52 mm - version S3: ball Ø52 mm guide tube: Ø12 mm, max. length 3000 mm terminal box: 80 x 75 x 55 mm
Process connection	thread G3/8A, G1-1/2A, G2A to DIN/ISO 228/1
General information	
Supplementary information	Statement of Conformity, Declaration of Conformity, Attestation of Conformity and instructions have to be observed where applicable. For information see www.pepperl-fuchs.com .
Accessories	
Optional accessories	LML-Z11 set collar, 1.4571/316Ti LML-FS2 float, cylinder, Ø44 mm x 52 mm, 1.4571/316Ti LML-FS3 float, ball, Ø52 mm, 1.4571/316Ti

Release date 2020-02-27 09:44 Date of issue 2020-02-27 t3033_eng.xml



This overview does not mark options which are mutually exclusive.

*Option with * = on request/in preparation*

Device	
LML	Magnetic immersion probe for limit value detection
Number of contacts	
1	1 contact
2	2 contacts
3	3 contacts
Guide tube material	
S	1.4571/316Ti
Float	
2	Cylinder, Ø44 mm x 52 mm, 1.4571/316Ti
3	Ball, Ø52 mm, 1.4571/316Ti
Process connection	
G1	Thread G3/8, DIN/ISO 228/1, with PVC cable, 1 m
G5	Thread G1-1/2A, DIN/ISO 228/1
G6	Thread G2A, DIN/ISO 228/1
Process connection material	
S	1.4571/316Ti
Electrical output	
DW	Change-over contact, directly
Additional options	
PVC1	PVC cable, 1 m, for G1 process connection
Guide tube length	
L	<p>Specified length, max. 3000 mm</p> <p>Specify the location of the contacts when placing your order. The tube length L will be defined corresponding to the lowest contact location.</p> <p>Minimum distance between L1 and L2: 20 mm.</p> <p>If you are using 3 contacts, observe the following distances</p> <ul style="list-style-type: none"> • minimum distance between L1 and L2: 80 mm • minimum distance between L2 and L3: 20 mm