



FUSE LINK CLASS CC ACC. TO UL STANDARD 248-4
SLOW BLOW RATED CURRENT 2,5A RATED VOLTAGE
UP TO 600V AC SIZE 10,3MM X 38,1MM

Similar to image

Technical data:

| | | |
|---------------------------------|---|--------|
| product brand name | | SETRON |
| Operating current / rated value | A | 2.5 |
| Operating voltage / rated value | V | 600 |
| Product component / striker | | No |

Certificates/approvals:

General Product Approval



Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)


<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3NW1025-0HG>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3NW1025-0HG/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3NW1025-0HG

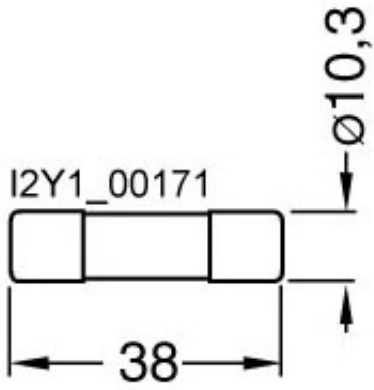

last change:

Jul 7, 2014