



REVERSING CONTACTOR COMBINATION AC-3 11
KW/400V,
SIZE S0 AC 110 V 50 HZ/120 V 60HZ

General technical data:

Product function		reversing contactor
Size of the contactor		S0
Width	mm	100
Height	mm	86
Depth	mm	91
Reference code		
<ul style="list-style-type: none"> • according to DIN EN 61346-2 • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 		Q K

Control circuit/ Control:

Voltage type / of control feed voltage		AC
Control supply voltage / 1		
<ul style="list-style-type: none"> • at 50 Hz / for AC <ul style="list-style-type: none"> • rated value • for AC / at 60 Hz <ul style="list-style-type: none"> • rated value 	V	120
	V	120
Control supply voltage frequency		
<ul style="list-style-type: none"> • 1 / rated value • 2 / rated value 	Hz	60
	Hz	60

Main circuit:

Operating current / at AC-3 / at 400 V • rated value	A	25
Service power / at AC-3 / at 400 V • rated value	kW	11

Auxiliary circuit:

Number of NC contacts / for auxiliary contacts / per direction of rotation	0
Number of NO contacts / for auxiliary contacts / per direction of rotation	0

Connections/ terminals:

Design of the electrical connection / for main current circuit	screw-type terminals
Mounting type	screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

Ambient conditions:

Ambient temperature • during operating	°C	-25 ... +60
Protection class IP / on the front		IP20

Certificates/ approvals:

General Product Approval	Declaration of Conformity
---------------------------------	----------------------------------



Shipping Approval



Shipping Approval other



[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)




<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator

<http://www.siemens.com/cax>

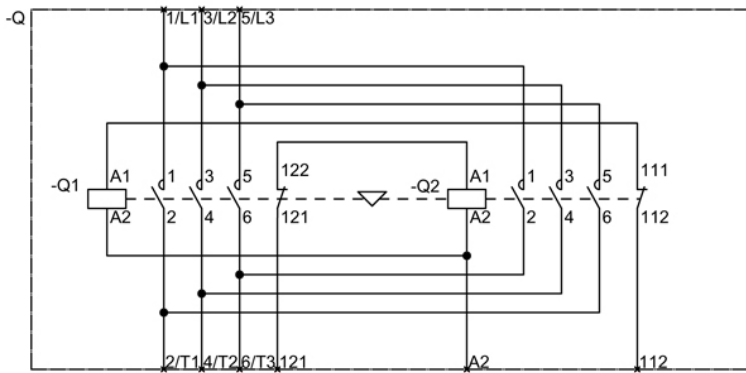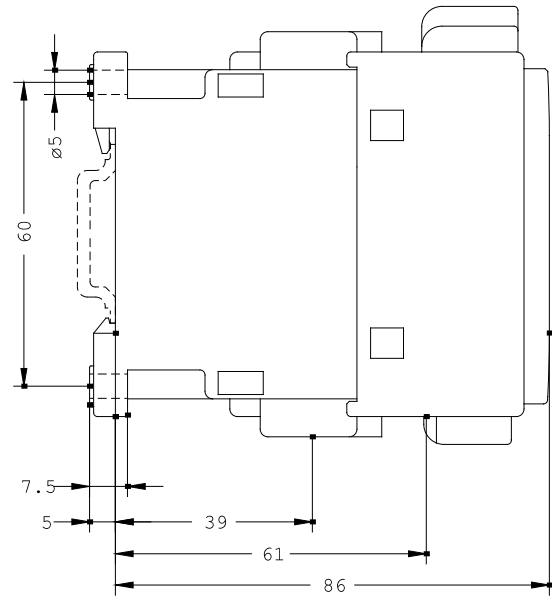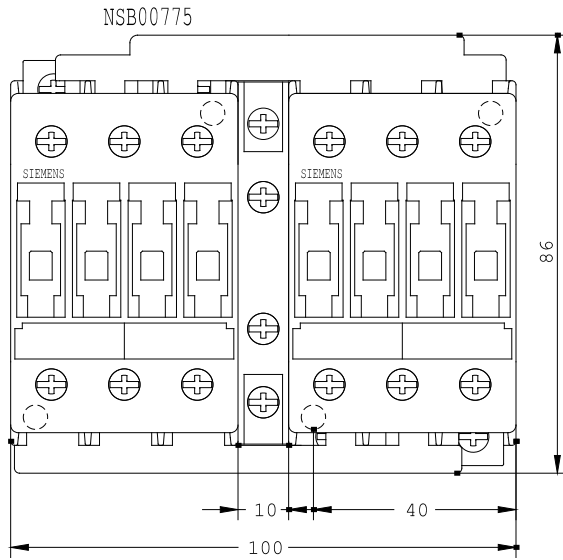

last change:

Jul 28, 2014