



DIRECT START, AC 400V, SZ. S0,
 23 ...28A,
 100V 50HZ / 100 ... 110V 60HZ SPRING-LOADED
 CONNECTION FOR DIN RAIL MOUNTING,
 TYPE OF ASSIGNMENT 2,IQ = 150KA (ALSO FULFILLS
 TYPE OF ASSIGNMENT 1) 1NO+1NC (CONTACTOR) COIL
 WITH RC ELEMENT ON FRONT INSERTED
 (CONTACTOR) 1NO+1NC (CIRCUIT BREAKER,
 TRANSVERSE)

Allgemeine technische Daten:

product brand name		SIRIUS
Product designation		non-fused load feeders 3RA2
Size of the load feeder		S0
Number of poles / for main current circuit		3
Installation altitude / at a height over sea level / maximum	m	2,000
Product function		
• short circuit protection		Yes
• overload protection		Yes
• phase disturbance recognition		Yes
Product component		
• trip indicator		No
• auxiliary switch		Yes
Product extension / auxiliary switch		Yes
Design of display / for switching status		Switch setting
Insulation voltage / with degree of pollution 3 / rated value	V	690
Impulse voltage resistance / rated value	kV	6
Protection class IP		
• on the front		IP20
Protection against electrical shock		finger-safe

Shock resistance / according to IEC 60068-2-27		6g / 11 ms
maximum permissible voltage for safe isolation in networks with non-grounded star point		
Ambient temperature	°C	
• during transport		-50 ... +80
• during storage		-50 ... 80
• during operating		-20 ... 60
Manufacturer article number		
• of the circuit-breakers included in the scope of supply		3RV2011-4NA25
• of the contactor included in the scope of supply		3RT2027-2EB40
• of the RS applied assembly kit		
• of the link module included in the scope of supply		3RA2921-2AA00
• of the busbar adapter included in the scope of supply		
• of the RH applied assembly kit		

Hauptstromkreis:

Operating current / rated value	A	32
Mechanical operating cycles as operating time / of the auxiliary contacts / typical		10,000,000
Derating factor for rated value of the operational current		
Operating voltage / rated value	V	690
Voltage type / for main circuit		AC
Frequency		-
Service power / at AC-3	W	
• at 400 V / rated value		11,000
• at 500 V rated value		18,500
• at 690 V rated value		22,000
Operating current / at AC-3 / at 400 V / rated value	A	22
Type of assignment		2

Steuerstromkreis/ Ansteuerung:

Voltage type / for auxiliary and control circuit		AC
Control supply voltage / at 60 Hz / at AC	V	
• rated value		100 ... 110
Apparent holding power / of the solenoid / for AC	V·A	9.8

Hilfsstromkreis:

Design of the auxiliary switch		transverse
Number of NC contacts / for auxiliary contacts		2
Number of NO contacts / for auxiliary contacts		2
Number of changeover contacts / for auxiliary contacts		0

Schutz-/Überwachungsfunktion:		
Design of the overload circuit breaker		thermal (bimetallic)
Trip class		CLASS 10
Adjustable response current / of the current-dependent overload release	A	23 ... 28
Design of the short-circuit trip		magnetic
Conditional short-circuit current (I_q)	A	153,000
<ul style="list-style-type: none"> • at 400 V / according to IEC 60947-4-1 / rated value • at 690 V according to IEC 60947-4-1 rated value 		-
Varification of suitability / ATEX		Yes









Sicherheitsrelevante Kenngrößen:		
Proportion of dangerous failures		
<ul style="list-style-type: none"> • with high demand rate / according to SN 31920 	%	73
B10 value / with high demand rate / according to SN 31920		1,000,000

Einbau/ Befestigung/ Abmessungen:		
Mounting type		screw and snap-on mounting onto 35 mm standard mounting rail
mounting position		vertical
Depth	mm	106.9
Height	mm	242.6
Width	mm	45
Distance, to be maintained, to the ranks assembly		
<ul style="list-style-type: none"> • upwards 	mm	30
<ul style="list-style-type: none"> • forwards 	mm	10
<ul style="list-style-type: none"> • sideways 		0
<ul style="list-style-type: none"> • backwards 		0
<ul style="list-style-type: none"> • downwards 		30




Anschlüsse/ Klemmen:		
Arrangement of electrical connectors / for main current circuit		from front
Design of the electrical connection		
<ul style="list-style-type: none"> • for main current circuit 		spring-loaded terminals
<ul style="list-style-type: none"> • for auxiliary and control current circuit 		spring-loaded terminals
Type of the connectable conductor cross-section for main contacts		
<ul style="list-style-type: none"> • solid or multi-stranded 		2x (1 ... 10 mm ²)
<ul style="list-style-type: none"> • finely stranded 		
<ul style="list-style-type: none"> <ul style="list-style-type: none"> • with conductor end processing 		2x (1 ... 6 mm ²)
<ul style="list-style-type: none"> <ul style="list-style-type: none"> • without conductor final cutting 		2x (1 ... 6 mm ²)

Type of connectable conductor cross-sections for auxiliary contacts <ul style="list-style-type: none"> • solid or multi-stranded • finely stranded <ul style="list-style-type: none"> • with conductor end processing • without conductor final cutting 	2x (0,5 ... 4 mm ²) 2x (0.5 ... 2.5 mm ²) 2x (0.5 ... 2.5 mm ²)
Type of the connectable conductor cross-section / for AWG conductors <ul style="list-style-type: none"> • for main contacts • for auxiliary contacts 	2x (18 ... 8) 2x (20 ... 16), 2x (18 ... 14)
Design of the thread of the connection screw for main contacts	
Design of the thread of the connection screw of the auxiliary and control pins	

UL/CSA Bemessungsdaten:	
yielded mechanical performance [hp] / for three-phase squirrel cage motors <ul style="list-style-type: none"> • at 460/480 V rated value • at 575/600 V rated value 	

Approbationen/ Zertifikate:					
General Product Approval		For use in hazardous locations	Declaration of Conformity	Test Certificates	
 CSA	 EAC	 UL	 ATEX	 EG-Konf.	Type Test Certificates/Test Report
Shipping Approval			other		
 ABS	 PRS	 RINA	other	Environmental Confirmations	

Weitere Informationen:
Information- and Downloadcenter (Kataloge, Broschüren,...) http://www.siemens.de/industrial-controls/catalogs
Industry Mall (Online-Bestellsystem) http://www.siemens.de/industrial-controls/mall
CAX-Online-Generator http://www.siemens.com/cax
Service&Support (Handbücher, Betriebsanleitungen, Zertifikate, Kennlinien, FAQs,...) http://support.automation.siemens.com/WWW/view/de/3RA2125-4NE27-0EG6/all
Bilddatenbank (Produktfotos, 2D-Maßzeichnungen, 3D-Modelle, Geräteschaltpläne, ...) http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RA2125-4NE27-0EG6

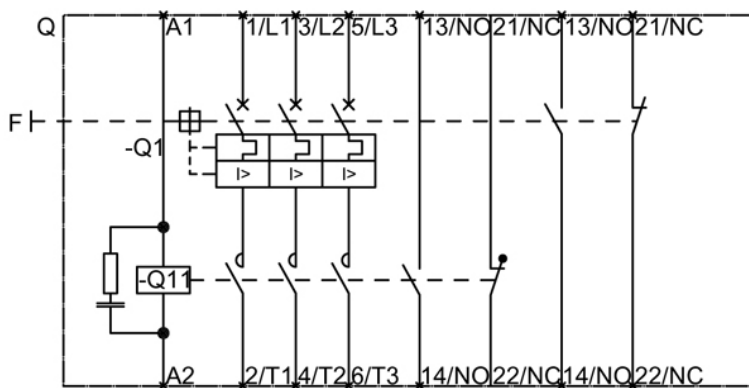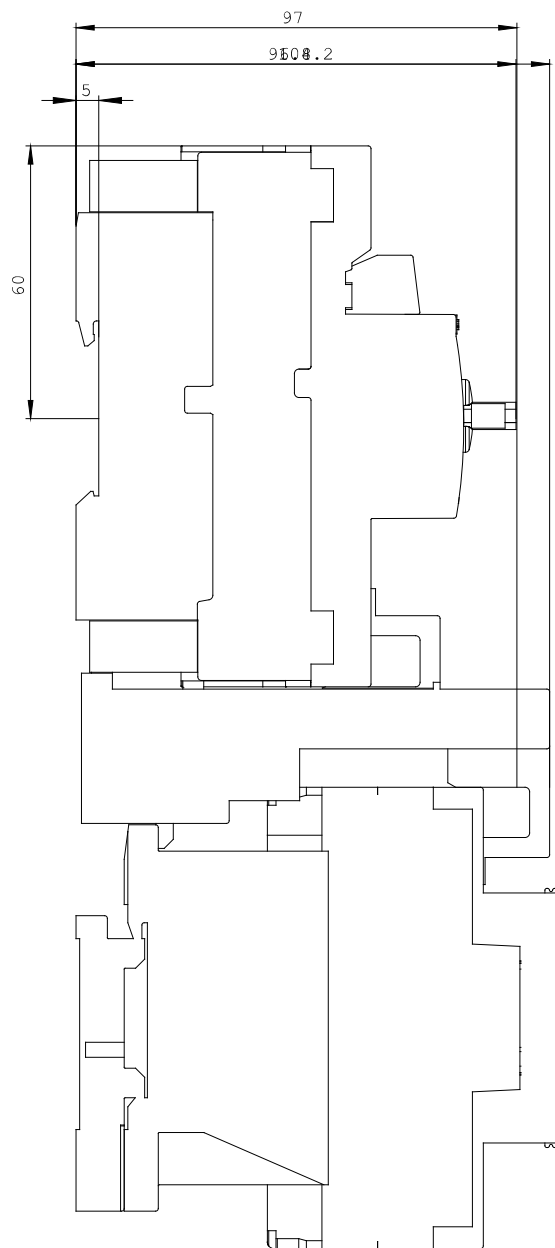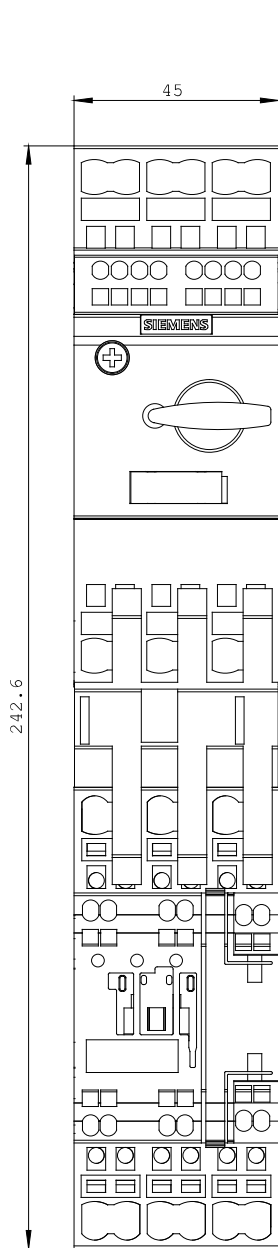

letzte Änderung:

Jul 28, 2014