



Safety controllers Flexi Classic Main unit

UE410-MU4T50



Model Name > **UE410-MU4T50**
Part No. > **6032670**



At a glance

- Two variants to choose from: main module for common applications or an expert module for muting
- Central processing unit
- Modularly expandable
- 6 inputs, 4 outputs
- Small width of 22.5 mm
- Pluggable terminals for a fast module replacement
- PNP outputs, each up to 2A

Your benefits

- One module offers complete functionality of inputs and outputs up to the logic
- Easy to expand if more inputs and outputs are required
- Easy diagnostics via clear LED status indicators, which reduces downtime
- Use of powerful PNP semiconductor outputs allows to remove relays



Applications

Emergency stop pushbuttons:	✓
Opto-electronic protective devices:	✓
Non-contact safety switches:	✓
Two-hand control systems:	✓
Testable inductive sensors:	✓
Electro-mechanical safety switches:	✓

Safety-related parameters

Safety integrity level:	SIL3 (IEC 61508)
Category:	Category 4 (EN ISO 13849)
Performance level:	PL e (EN ISO 13849)
PFHd:	2.5 * 1E-09 6.0 * 10-9
TM (mission time):	20 a
Stop category:	0 (EN 60204)

Functions

Number of reset-/restart inputs:	2
Number of external device monitoring:	2

Muting:	✓
Logical functions:	OR, AND, BYPASS, Muting
Safe device communication via EFI/SDL:	-

Electrical data


Supply voltage:	24 V DC (19.2 V DC ... 30 V DC)
Type of supply voltage:	PELV (electrical output circuit on UE410-4RO/UE410-2RO > 25 V AC/60 V DC), PELV or SELV (electrical output circuit on UE410-4RO/UE410-2RO < 25 V AC/60 V DC)
Power consumption:	3 W
Protection class:	EN 61140
Ripple:	≤ 3 V
Switch-on time:	60 s
Short-circuit protection:	4 A gG
Number of inputs:	2 dual-channel or 4 single-channel
Input voltage HIGH:	13 V DC ... 30 V DC
Input voltage LOW:	-5 V DC ... 5 V DC
Input current HIGH:	2.4 mA ... 3.8 mA
Input current LOW:	-2.5 mA ... 2.1 mA
Switch-on time of inputs:	70 ms
Synchronous time monitoring:	1,500 ms (at program 2), 500 ms (at program 4 and 5)
Number of muting sensors:	0, 2
Muting time to operate:	61 ms, at program 3 ¹⁾
Tolerated muting sensor signal interrupt:	100 ms, at program 3 ²⁾
Switch-on time ENTER button:	3 s Upon applying the supply voltage
Number of outputs:	2 dual-channel or 4 single-channel
Type of output:	PNP semiconductors, short-circuit protected, cross-circuit monitored
Output voltage:	18 V DC ... 30 V DC
Output current:	2 A
Response time:	≤ 13 ms ≤ 79 ms ³⁾

¹⁾ Time between valid muting condition and active muting ²⁾ One muting input may be LOW for this time ³⁾ Depending on the selected program and the connected sensors


Ambient data

Enclosure rating terminals:	IP 20
Protection class housing:	IP 40
Ambient operating temperature:	-25 °C ... 55 °C
Storage temperature:	-25 °C ... 70 °C
Air humidity:	15 % ... 95 %, non-condensing
Climate conditions according to:	EN 61131-2
Electromagnetic compatibility (EMC):	EN 61000 EN 55011
Vibration resistance:	5 g, 5 Hz ... 500 Hz (EN 60068-2-6)
Connection type:	Cable gland
Connection type:	Plug-in spring terminals
Dimensions (W x H x D):	22.5 mm x 96.5 mm x 120.8 mm
Weight:	180 g

Connection diagram

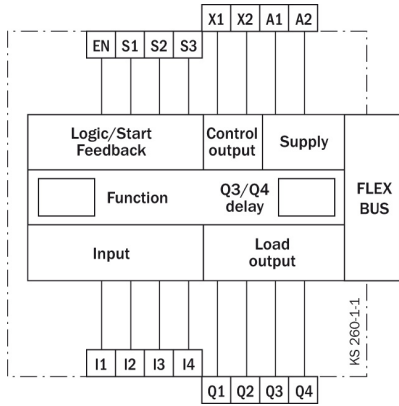

Dimensional drawing

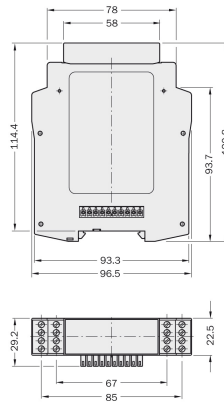

Australia

Phone +61 3 9457 0600
1800 334 802 – tollfree
E-Mail sales@sick.com.au

Belgium/Luxembourg

Phone +32 (0)2 466 55 66
E-Mail info@sick.be

Brasil

Phone +55 11 3215-4900
E-Mail sac@sick.com.br

Canada

Phone +1 905 771 14 44
E-Mail information@sick.com

Ceská Republika

Phone +420 2 57 91 18 50
E-Mail sick@sick.cz

China

Phone +86 4000 121 000
E-Mail info.china@sick.net.cn
Phone +852-2153 6300
E-Mail ghk@sick.com.hk

Danmark

Phone +45 45 82 64 00
E-Mail sick@sick.dk

Deutschland

Phone +49 211 5301-301
E-Mail kundenservice@sick.de

España

Phone +34 93 480 31 00
E-Mail info@sick.es

France

Phone +33 1 64 62 35 00
E-Mail info@sick.fr

Great Britain

Phone +44 (0)1727 831121
E-Mail info@sick.co.uk

India

Phone +91-22-4033 8333
E-Mail info@sick-india.com

Israel

Phone +972-4-6801000
E-Mail info@sick-sensors.com

Italia

Phone +39 02 27 43 41
E-Mail info@sick.it

Japan

Phone +81 (0)3 3358 1341
E-Mail support@sick.jp

Magyarország

Phone +36 1 371 2680
E-Mail office@sick.hu

Nederlands

Phone +31 (0)30 229 25 44
E-Mail info@sick.nl

Norge

Phone +47 67 81 50 00
E-Mail austefjord@sick.no

Österreich

Phone +43 (0)22 36 62 28 8-0
E-Mail office@sick.at

Polska

Phone +48 22 837 40 50
E-Mail info@sick.pl

România

Phone +40 356 171 120
E-Mail office@sick.ro

Russia

Phone +7-495-775-05-30
E-Mail info@sick.ru

Schweiz

Phone +41 41 619 29 39
E-Mail contact@sick.ch

Singapore

Phone +65 6744 3732
E-Mail admin@sicksgp.com.sg

Slovenija

Phone +386 (0)1-47 69 990
E-Mail office@sick.si

South Africa

Phone +27 11 472 3733
E-Mail info@sickautomation.co.za

South Korea

Phone +82 2 786 6321/4
E-Mail info@sickkorea.net

Suomi

Phone +358-9-25 15 800
E-Mail sick@sick.fi

Sverige

Phone +46 10 110 10 00
E-Mail info@sick.se

Taiwan

Phone +886-2-2375-6288
E-Mail sales@sick.com.tw

Türkiye

Phone +90 (216) 528 50 00
E-Mail info@sick.com.tr

United Arab Emirates

Phone +971 (0) 4 8865 878
E-Mail info@sick.ae

USA/México

Phone +1(952) 941-6780
1 800-325-7425 – tollfree
E-Mail info@sickusa.com

More representatives and agencies
at www.sick.com