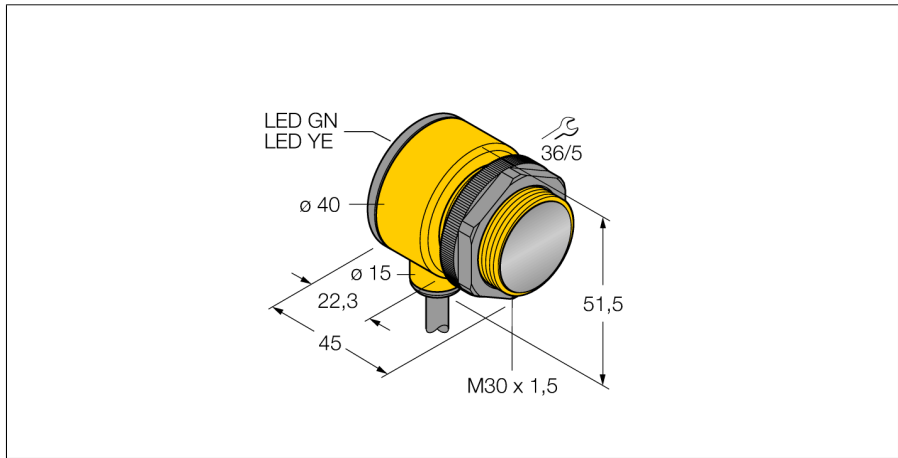
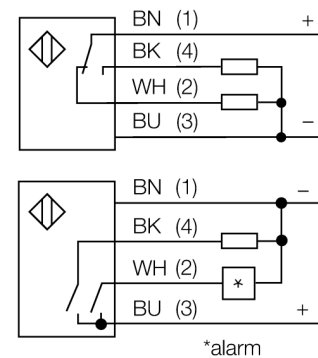


**Photoelectric sensor
opposed mode sensor (receiver)
T30SP6R**



- Cable, 2 m
- Protection class IP67
- Ambient temperature: -40...+70 °C
- Selectable light/dark operation or light operation with alarm function
- Operating voltage: 10...30 VDC
- PNP switching output, changeover

Wiring diagram



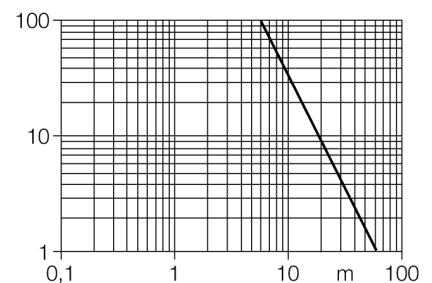
Type code	T30SP6R
Ident no.	3032489
Operating mode	opposed mode sensor (receiver)
Range	0...60000 mm
Ambient temperature	-40...+70 °C
Operating voltage	10...30VDC
No-load current I ₀	≤ 25 mA
Short-circuit protection	yes/ cyclic
Reverse polarity protection	yes
Output function	connection programmable, PNP
Switching frequency	≤ 160 Hz
Readiness delay	≤ 100 ms
Overcurrent release	> 220 mA
Design	cylindrical/threaded, T30
Dimensions	45 x 40 x 51.5 mm
Housing material	plastic, PBT
Lens	plastic, Lexan
Connection	cable
Cable length	2 m
Cable cross section	4 x 0.5 mm ²
Protection class	IP67
Power-on indication	LED green
Switching state	LED yellow
Error indication	LED green flashing
Alarm display	LED yellow flashing

Functional principle

Opposed mode sensors consist of an emitter and receiver. They are installed opposite each other so that the light from the emitter is aimed directly at the receiver. When an object interrupts or weakens the light beam, the sensor switches. Opposed mode sensors are the most reliable photoelectric sensors for detection of opaque targets. An excellent contrast between light and dark conditions and an extremely high excess gain are typical of this sensing mode, thus allowing operation over larger distances and under difficult conditions.





Excess gain curve

Excess gain in relation to the distance



**Photoelectric sensor
opposed mode sensor (receiver)
T30SP6R**

Accessories

Type code	Ident no.	Description	Dimension drawing
SMB1815SF	3053279	Mounting bracket, PBT black, for PICO-GUARD points	 <p>Technical drawing of a small black PBT mounting bracket. Dimensions include: 11.7 mm height, 50.8 mm width, 43.2 mm depth, 25.4 mm base width, 36.1 mm mounting hole offset, and 15 mm and 6.5 mm diameters for mounting holes.</p>
SMB30A	3032723	Mounting bracket, stainless steel, for sensors with 30 mm thread	 <p>Technical drawing of a stainless steel mounting bracket. Dimensions include: 45 mm width, 6.3 mm hole diameter, 6.3 mm hole offset, 38.5 mm depth, 61 mm total depth, 7.5 mm base offset, and R40 radius.</p>
SMB30FAM10	3011185	Mounting bracket, stainless steel, for M10 x 1.5 thread, thread length 30 mm	 <p>Technical drawing of a stainless steel mounting bracket with an M10 thread. Dimensions include: 78.4 mm width, 60.3 mm hole diameter, 19 mm hole offset, 75 mm total height, 61.6 mm mounting height, 48 mm thread length, and 8 mm and 4 mm hole diameters.</p>
SMBAMS30P	3073135	Mounting bracket, stainless steel, for sensors with 30 mm thread	 <p>Technical drawing of a stainless steel mounting bracket. Dimensions include: 85 mm width, 23 mm hole offset, 6.53 mm hole diameter, 32 mm hole diameter, 18 mm hole diameter, 31 mm hole diameter, 45 mm width, 2.6 mm hole offset, and 25 mm hole diameter.</p>