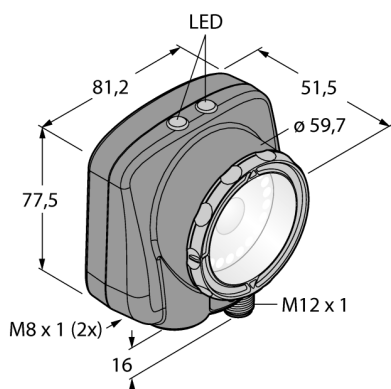




- Internal memory for 30 inspections
- 1/3" CMOS, 752x480 pixels
- Integrated ring light: white
- Protection class IP67
- External strobe output + 5 VDC
- External trigger input
- Lens, 8mm, M12x1
- Ethernet IP data communication: M8 male connector, 4-pole
- 3 x parameterizable switching output
- Operating voltage: 10...30 VDC
- USB 2.0 host: M8 female connector, 4-pole
- External strobe output: +5 VDC
- Display: Integrated 68.5 mm LCD color display, 320 x 240 transreflective

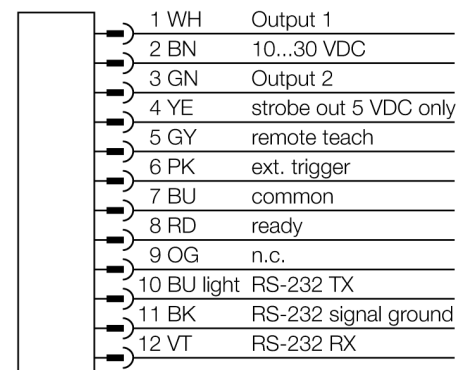
Type code	IVUPTBW08
Ident no.	3016569
Design	rectangular, iVu PLUS
Dimensions	51.5 x 81.2 x 95.3 mm
Housing material	plastic, PBT
Window material	Acrylic, clear
Connection	male, M12 x 1, 12-wire
Protection class	IP67
Ambient temperature	0...+50 °C

Power on display	LED, green
Switching state	LED green
Error indication	LED red

Operating voltage	10...30VDC
DC rated operational current	≤ 850 mA
Short-circuit protection	yes/ cyclic
Reverse polarity protection	yes
Switch element function	programmable, PNP/NPN
Output current	≥ 150 mA

Operating mode	BCR
Auflösung	752 x 480 Pixel
Bildfrequenz	100 fps
Light type	white
Brennweite	8 mm

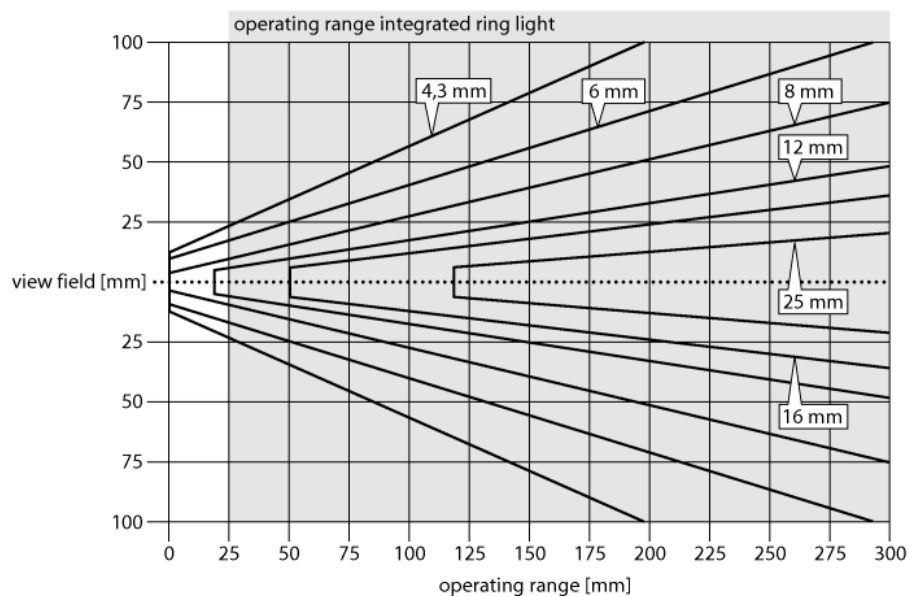
Wiring diagram



Functional principle

The barcode reader consists of a camera and an integrated light (not IVUPTBX version) able to scan up to 10 different barcodes and to transmit the data via Ethernet IP interface. A selection can be configured for certain barcode types such as DataMatrix (ECC 200) and a number of linear codes such as Code128, Code39, CODABAR, Interleaved 2 of 5, EAN13, EAN8, UPCE, Postnet, IMB and Pharmacode.





Sensor configuration via PC is not required! Transmission of log files and firmware updates via USB interface.




Selecting the focal length

With known object size or scan field the matching vision sensor is found simply by determining the ratio between the sensing range and the focal length. Use the graphics for selection. Here, the sensing ranges are put in relation to the field view and the lens focal length.


Accessories

Type code	Ident no.	Description	Dimension drawing
SMBIVURAR	3082547	Brackets for mounting on right side	 Technical drawing of the SMBIVURAR bracket. It is a right-side mounting bracket with dimensions: 16.8, 29.3, 4.4, 36.4, 78.1, 22.5, 27, 49, 4.4, 25, 7, 44, and a 1/4-20 thread.
SMBIVURAL	3082546	Brackets for mounting on left side	 Technical drawing of the SMBIVURAL bracket. It is a left-side mounting bracket with dimensions: 36.4, 4.4, 78.1, 16.8, 29.3, 22.5, 27, 49, 4.4, 25, 7, 44, and a 1/4-20 thread.
SMBIVUU	3082549	U-bracket for base mounting (incl. SMBIVUB baseplate)	 Technical drawing of the SMBIVUU U-bracket. It is a U-shaped bracket for base mounting with dimensions: 54, 30, 42, 61.2, 6.25, 25.4, 5.35 (8x), and a 1/4-20 UNC thread.
SMBIVUB	3082548	Baseplate to extend the installation	 Technical drawing of the SMBIVUB baseplate. It is a baseplate to extend the installation with dimensions: 33.1, 29, 56.8, 23.8, 5.8, 23.8, and M5 x 0.8 (2x) holes.

Wiring accessories

Type code	Ident no.	Description	Dimension drawing
IVUC-1206	3014407	Power supply, M12x1 female, 12-pole, 1.83m	 Technical drawing of the IVUC-1206 power supply connector. It is a 12-pole M12x1 female connector with a length of 42 and a diameter of 15.
IVUC-1206RA	3014412	Power supply, M12x1 rectangular female, 12-pole, 1.83m	

Wiring accessories

Type code	Ident no.	Description	Dimension drawing
IVUC-E-406	3013892	Ethernet connection cable, M8x1 on RJ45, 4-pole, 2m	
PSG-4M-401-USB	3011336	USB adapter cable, male M12x1, 4-pole, 0.3m	