



CONTACTOR, AC-3 22 KW/400 V, AC 400V,
50HZ/60HZ, 440V, 60HZ, 2 NO + 2 NC,
3 POLE, MOD. S2, SCREW CONNECTION

General technical data:

| | | |
|---|----|-------------|
| product brand name | | SIRIUS |
| Size of the contactor | | S2 |
| Protection class IP / on the front | | IP20 |
| Degree of pollution | | 3 |
| Installation altitude / at a height over sea level / maximum | m | 2,000 |
| Ambient temperature / during operating | °C | -25 ... +60 |
| Mechanical operating cycles as operating time | | |
| <ul style="list-style-type: none"> • of the contactor / typical | | 10,000,000 |
| <ul style="list-style-type: none"> • of the contactor with added auxiliary switch block / typical | | 10,000,000 |
| <ul style="list-style-type: none"> • of the contactor with added electronics-compatible auxiliary switch block / typical | | 5,000,000 |

Main circuit:

| | | |
|--|---|----|
| Number of NC contacts / for main contacts | | 0 |
| Number of NO contacts / for main contacts | | 3 |
| Operating current | | |
| <ul style="list-style-type: none"> • at AC-1 / at 400 V <ul style="list-style-type: none"> • at 40 °C ambient temperature / rated value | A | 60 |
| <ul style="list-style-type: none"> • at AC-3 / at 400 V / rated value | A | 50 |
| <ul style="list-style-type: none"> • at AC-4 / at 400 V / rated value | A | 41 |

| | | |
|--|----|--------|
| • with 1 current path / at DC-1 | A | 55 |
| • at 24 V / rated value | A | 4.5 |
| • at 110 V / rated value | | |
| • with 2 current paths in series / at DC-1 | A | 55 |
| • at 24 V / rated value | A | 25 |
| • at 110 V / rated value | | |
| • with 3 current paths in series / at DC-1 | A | 55 |
| • at 24 V / rated value | A | 55 |
| • at 110 V / rated value | | |
| • with 1 current path / at DC-3 / at DC-5 | A | 35 |
| • at 24 V / rated value | A | 2.5 |
| • at 110 V / rated value | | |
| • with 2 current paths in series / at DC-3 / at DC-5 | A | 55 |
| • at 24 V / rated value | A | 25 |
| • at 110 V / rated value | | |
| • with 3 current paths in series / at DC-3 / at DC-5 | A | 55 |
| • at 24 V / rated value | A | 55 |
| • at 110 V / rated value | | |
| Service power | | |
| • at AC-2 / at 400 V / rated value | kW | 22 |
| • at AC-3 / at 400 V / rated value | kW | 22 |
| • at AC-4 / at 400 V / rated value | W | 22,000 |

Control circuit:

| | | |
|---|-----|-------------|
| Voltage type / of control feed voltage | | AC |
| Operating range factor control supply voltage rated value / of the magnet coil | | |
| • at 50 Hz | | |
| • for AC | | 0.8 ... 1.1 |
| • at 60 Hz | | |
| • for AC | | 0.8 ... 1.1 |
| Apparent pull-in power / of the solenoid / for AC | V·A | 166 |
| Apparent holding power / of the solenoid / for AC | V·A | 12.6 |
| Inductive power factor / with the pull-in power of the coil | | 0.71 |
| Inductive power factor / with the pull-in power of the coil | | 0.37 |

Auxiliary circuit:

| | | |
|---|--|---|
| Contact reliability / of the auxiliary contacts | | 1 faulty switching per 100 million (17 V, 1 mA) |
| Number of NC contacts / for auxiliary contacts / instantaneous switching | | 2 |
| Number of NO contacts / for auxiliary contacts / instantaneous switching | | 2 |

Short-circuit:**Design of the fuse link**

- for short-circuit protection of the auxiliary switch / required
- for short-circuit protection of the main circuit
 - with type of assignment 1 / required
 - at type of coordination 2 / required

fuse gL/gG: 10 A

fuse gL/gG: 160 A

fuse gL/gG: 80 A

Installation/mounting/dimensions:**Mounting type**

screw and snap-on mounting onto 35 mm standard mounting rail according to DIN EN 50022

series installation

Yes

Width

mm

55

Height

mm

112

Depth

mm

164

Distance, to be maintained, to earthed part / sideways

mm

6

Connection type:**Design of the electrical connection**

- for main current circuit
- for auxiliary and control current circuit

screw-type terminals

screw-type terminals

Type of the connectable conductor cross-section

- for main contacts
 - solid
 - stranded
 - finely stranded
 - with conductor end processing
 - without conductor final cutting
- for AWG conductors / for main contacts
- for auxiliary contacts
 - solid
 - finely stranded
 - with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (0.75 ... 16 mm²)2x (0.75 ... 25 mm²)2x (0.75 ... 16 mm²)2x (0.75 ... 16 mm²)

2x (18 ... 2)

2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²), max. 2x (0.75 ... 4 mm²)2x (0.5 ... 1.5 mm²), 2x (0.75 ... 2.5 mm²)

2x (20 ... 16), 2x (18 ... 14), 1x 12

Certificates/approvals:

General Product Approval



**Functional Safety /
Safety of
Machinery**

[Type Examination](#)

Declaration of Conformity



Test Certificates

[Special Test
Certificate](#)

[Type Test
Certificates/Test
Report](#)

Shipping Approval



GL



LRS



RINA



RMRS

other

[Confirmation](#)

[other](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator:





<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3RT1036-1AR64/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1036-1AR64

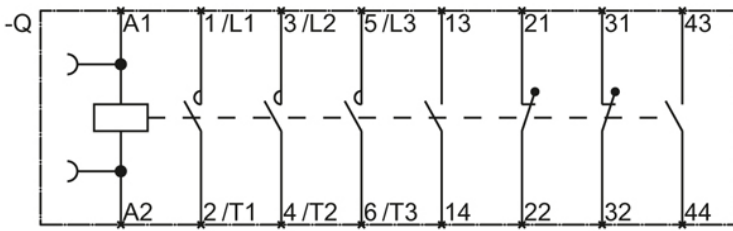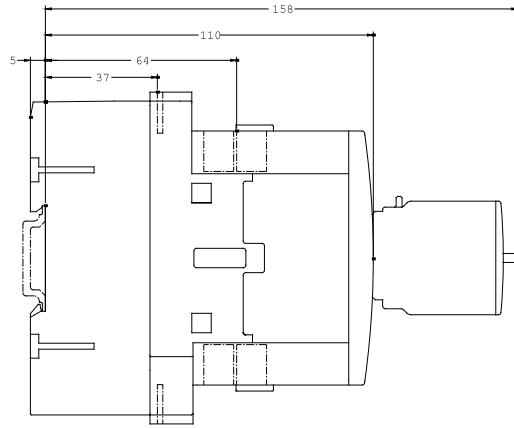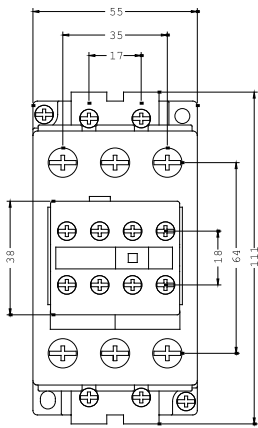

last change:

Jul 28, 2014