



CONTACTOR,  
90KW/400V/AC-3 AC(40...60HZ)/DC OPERATION UC 96-  
127V AUXILIARY CONTACTS 2NO+2NC 3-POLE,  
SIZE S6 BAR CONNECTIONS ELECTRONIC OPERATING  
MECHANISM WITH 24 V DC PLC INTERFACE CAGE  
CLAMP TERMINAL

#### General technical data:

<b>product brand name</b>		SIRIUS
<b>Size of the contactor</b>		S6
<b>Protection class IP / on the front</b>		IP00
<b>Degree of pollution</b>		3
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Ambient temperature / during operating</b>	°C	-25 ... +60
<b>Mechanical operating cycles as operating time</b>		
<ul style="list-style-type: none"> <li>• of the contactor / typical</li> <li>• of the contactor with added auxiliary switch block / typical</li> <li>• of the contactor with added electronics-compatible auxiliary switch block / typical</li> </ul>		<p>10,000,000</p> <p>10,000,000</p> <p>5,000,000</p>

#### Main circuit:

<b>Number of NC contacts / for main contacts</b>		0
<b>Number of NO contacts / for main contacts</b>		3
<b>Operating current</b>		
<ul style="list-style-type: none"> <li>• at AC-1 / at 400 V <ul style="list-style-type: none"> <li>• at 40 °C ambient temperature / rated value</li> </ul> </li> <li>• at AC-3 / at 400 V / rated value</li> <li>• at AC-4 / at 400 V / rated value</li> </ul>	<p>A</p> <p>A</p> <p>A</p>	<p>215</p> <p>185</p> <p>160</p>

• with 1 current path / at DC-1	A	160
• at 24 V / rated value	A	18
• at 110 V / rated value		
• with 2 current paths in series / at DC-1	A	160
• at 24 V / rated value	A	160
• at 110 V / rated value		
• with 3 current paths in series / at DC-1	A	160
• at 24 V / rated value	A	160
• at 110 V / rated value		
• with 1 current path / at DC-3 / at DC-5	A	160
• at 24 V / rated value	A	2.5
• at 110 V / rated value		
• with 2 current paths in series / at DC-3 / at DC-5	A	160
• at 24 V / rated value	A	160
• at 110 V / rated value		
• with 3 current paths in series / at DC-3 / at DC-5	A	160
• at 24 V / rated value	A	160
• at 110 V / rated value		
<b>Service power</b>		
• at AC-2 / at 400 V / rated value	kW	104
• at AC-3 / at 400 V / rated value	kW	104
• at AC-4 / at 400 V / rated value	W	90,000

Control circuit:		
<b>Design of the surge suppressor</b>		with varistor
<b>Voltage type / of control feed voltage</b>		AC/DC
<b>Operating range factor control supply voltage rated value / of the magnet coil</b>		
• at 50 Hz		
• for AC		0.8 ... 1.1
• at 60 Hz		
• for AC		0.8 ... 1.1
• for DC		0.8 ... 1.1
<b>Apparent pull-in power / of the solenoid / for AC</b>	V·A	280
<b>Apparent holding power / of the solenoid / for AC</b>	V·A	4.4
<b>Inductive power factor / with the pull-in power of the coil</b>		0.8
<b>Inductive power factor / with the pull-in power of the coil</b>		0.4
<b>Pull-in power / of the solenoid / for DC</b>	W	320
<b>Holding power / of the solenoid / for DC</b>	W	2.8

#### Auxiliary circuit:

<b>Number of NC contacts / for auxiliary contacts / instantaneous switching</b>		2
<b>Number of NO contacts / for auxiliary contacts / instantaneous switching</b>		2

### Short-circuit:

<b>Design of the fuse link</b>		
<ul style="list-style-type: none"> <li>• for short-circuit protection of the auxiliary switch / required</li> </ul>		fuse gL/gG: 10 A
<ul style="list-style-type: none"> <li>• for short-circuit protection of the main circuit <ul style="list-style-type: none"> <li>• with type of assignment 1 / required</li> <li>• at type of coordination 2 / required</li> </ul> </li> </ul>		fuse gL/gG: 355 A fuse gL/gG: 315 A

### Installation/mounting/dimensions:

<b>Mounting type</b>		screw fixing
<b>series installation</b>		Yes
<b>Width</b>	mm	120
<b>Height</b>	mm	172
<b>Depth</b>	mm	170
<b>Distance, to be maintained, to earthed part / sideways</b>	mm	10

### Connection type:

<b>Design of the electrical connection</b>		
<ul style="list-style-type: none"> <li>• for main current circuit</li> </ul>		Cage Clamp terminals
<ul style="list-style-type: none"> <li>• for auxiliary and control current circuit</li> </ul>		Cage Clamp terminals
<b>Type of the connectable conductor cross-section</b>		
<ul style="list-style-type: none"> <li>• for AWG conductors / for main contacts</li> </ul>		4 ... 250 kcmil
<ul style="list-style-type: none"> <li>• for auxiliary contacts <ul style="list-style-type: none"> <li>• solid</li> </ul> </li> </ul>		2x (0.25 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• finely stranded <ul style="list-style-type: none"> <li>• with conductor end processing</li> <li>• without conductor final cutting</li> </ul> </li> </ul>		2x (0.25 ... 1.5 mm <sup>2</sup> ) 2x (0.25 ... 2.5 mm <sup>2</sup> )
<ul style="list-style-type: none"> <li>• for AWG conductors / for auxiliary contacts</li> </ul>		2x (24 ... 14)

### Certificates/approvals:

<b>General Product Approval</b>	<b>Functional Safety / Safety of Machinery</b>	<b>Declaration of Conformity</b>
---------------------------------	------------------------------------------------	----------------------------------



CCC



CSA



UL

[Type Examination](#)



EG-Konf.

<b>Test Certificates</b>	<b>Shipping Approval</b>
--------------------------	--------------------------

[Special Test Certificate](#)



ABS



DNV



GL



RMRS

<b>other</b>
--------------

[Confirmation](#)

[other](#)

[Environmental Confirmations](#)

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator:**



<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3RT1056-2NF36/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3RT1056-2NF36](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3RT1056-2NF36)

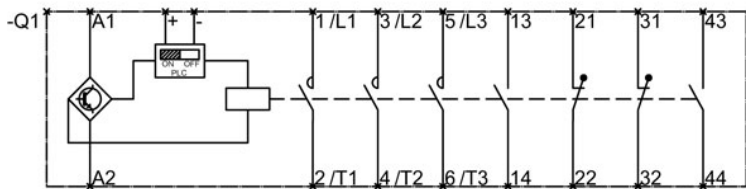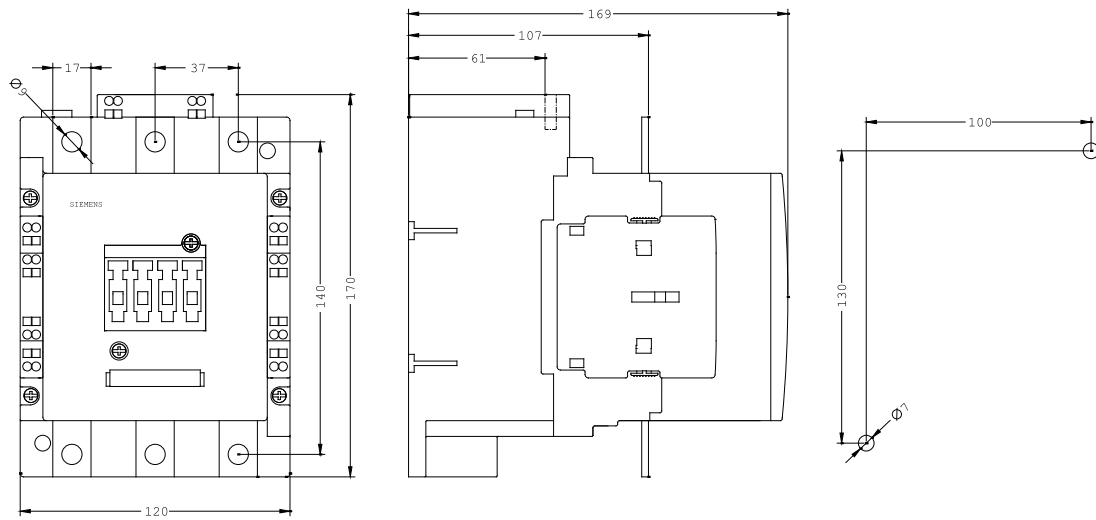

last change:

Jul 28, 2014