## **SIEMENS**

Product data sheet 3RV2925-5AB

3-PHASE INFEED TERMINAL, FOR 3-PHASE BUSBARS, CONNECTION FROM ABOVE, SIZE S00/S0



General technical data:				
product brand name		SIRIUS		
product designation	3-phase infeed terminals, size S0/S00, from above			
Size of the circuit-breaker		S00, S0		
Protection class IP / on the front		IP20		
Insulation voltage / with degree of pollution 3				
rated value	V	690		
Ambient temperature				
during storage	°C	-50 +80		
during operating	°C	-20 +60		
Current-carrying capacity / maximum	А	63		

Installation/mounting/dimensions:				
Width	mm	44.5		
Height	mm	39		
Depth	mm	27.2		
Acceptability for application / makes the assembly of self- protected combination motor controllers (type E) according to UL 508 possible		No		

Connections:	
Design of the electrical connection	

for main current circuit	screw-type terminals		
Type of the connectable conductor cross-section			
for main contacts			
• solid	1x (2.5 16 mm²)		
• stranded	1x (2,5 16 mm²)		
• finely stranded			
<ul> <li>with conductor end processing</li> </ul>	1x (2.5 16 mm²)		
• for AWG conductors / for main contacts	1x (10 4)		

0 1101			
Certificat	AC/	annr	ovale:
Oci tilica			ovais.

## Verification of suitability CE / UL / CSA / CCC

General Product Approval Declaration of Conformity

**Test Certificates** 







Special Test Certificate Type Test
Certificates/Test
Report

## **Shipping Approval**









GL





**Shipping Approval** 









other

## Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

http://www.siemens.com/industrial-controls/catalogs

Industry Mall (Online ordering system)

http://www.siemens.com/industrial-controls/mall

Cax online generator:


http://www.siemens.com/cax


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

http://support.automation.siemens.com/WW/view/en/3RV2925-5AB/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

 $\underline{\text{http://www.automation.siemens.com/bilddb/cax\_en.aspx?mlfb=3RV2925-5AB}$ 

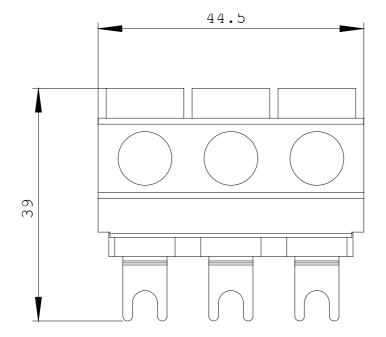



last change: Jan 21, 2013