

ACTUATOR-/INDICATOR COMPONENT W. SEPARATE LAMP TEST FUNCTION LAMP HOLDER BA 9S WITHOUT LAMP,
FOR LAMP MAX.2.6W SCREW TERMINAL RATED VOLTAGE ACC.TO LAMP SUITABLE FOR GLOW LAMP AC

Contact block/ lampholder:	
Product designation	lampholder
Number of NC contacts / for auxiliary contacts	0
Number of NO contacts / for auxiliary contacts	0
Number of changeover contacts / for auxiliary contacts	0
Product function / positive opening	No
Number of lampholders	1
Execution of the mounting	BA 9s
Design of the electrical connection	screw-type terminals

General technical data:	
Degree of pollution	class 3
Voltage type / of operating voltage	AC/DC
Reference code	P H
<ul style="list-style-type: none"> • according to DIN EN 61346-2 • according to DIN 40719 extended according to IEC 204-2 / according to IEC 750 	
Ambient temperature	
<ul style="list-style-type: none"> • during operating • during storage 	°C -25 ... +60 °C -25 ... +80
protection type IP	

<ul style="list-style-type: none"> • of the terminal • of the enclosure 		IP20 IP40
Operating voltage <ul style="list-style-type: none"> • at 50 Hz / at AC / rated value • at 60 Hz / at AC / rated value • for DC <ul style="list-style-type: none"> • rated value 	V V V	6 ... 230 6 ... 230 6 ... 230
Suitability for integration <ul style="list-style-type: none"> • pressure selection button • front element • suspension switch • suspension pushbutton 		Yes Yes Yes Yes
Insulation voltage / rated value	V	250
Impulse voltage resistance / rated value	kV	4
Tightening torque / for auxiliary contacts / with screw-type terminals	N·m	0.8
Product component <ul style="list-style-type: none"> • fluorescent materials • diode • lamp transformer • series resistance 		No No No Yes
Mounting type		front mounting
Width	mm	10
Height	mm	45.9
Depth	mm	36.8

Connections/ terminals:

Type of the connectable conductor cross-section

- for auxiliary contacts / solid
- for auxiliary contacts / solid / with conductor end processing
- for auxiliary contacts / finely stranded / with conductor end processing
- for AWG conductors / for auxiliary contacts

2x (1.0 ... 1.5 mm²)
2x (0.5 ... 0.75 mm²)
2x (0.5 ... 1.5 mm²)
2x (18 ... 14)

Certificates/ approvals:

General Product Approval

Declaration of
Conformity

other



EAC



[Confirmation](#)

[Environmental
Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

Cax online generator


<http://www.siemens.com/cax>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3SB3400-1H/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3SB3400-1H

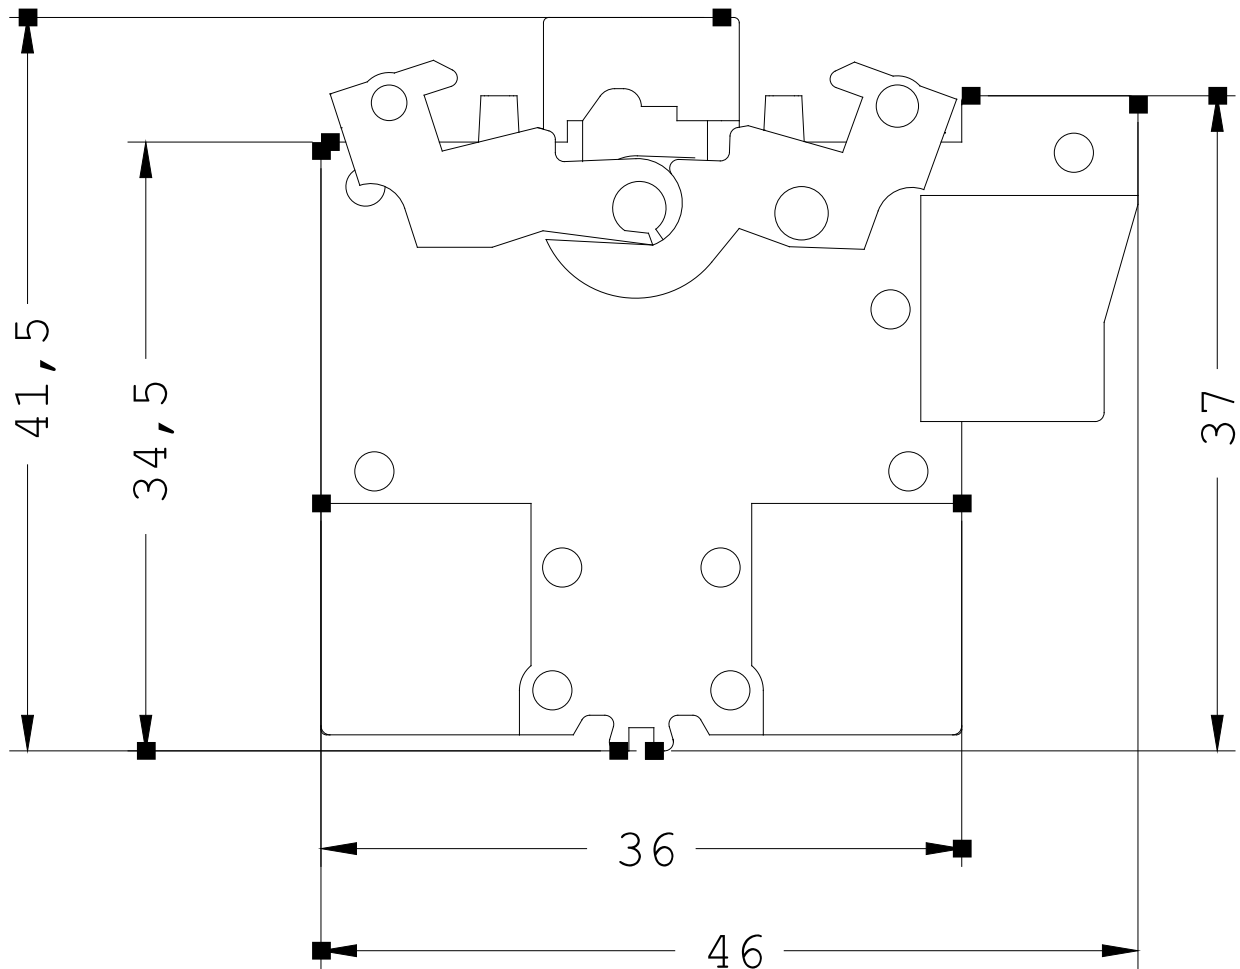

last change:

Jul 7, 2014