

CONNECTION CABLE;  
 LENGTH 0,3M;  
 FLAT;  
 CONNECTION OF BASIC UNIT TO CURRENT  
 MEASURING MODULE,  
 CURRENT/VOLTAGE MEASUR. MODULE,  
 OPERATOR PANEL OR TO EXPANSION MODULES VIA  
 SYSTEM INTERFACE

General technical data:		
<b>product brand name</b>		SIRIUS
<b>product designation</b>		connecting cable
<b>Ambient temperature</b>		
• during storage	°C	-40 ... +80
• during operating	°C	-25 ... +60
• during transport	°C	-40 ... +80
<b>Relative humidity</b>		
• during operating phase	%	5 ... 95

**Certificates/approvals:**

<b>General Product Approval</b>	<b>EMC</b>	<b>For use in hazardous locations</b>	<b>Test Certificates</b>
---------------------------------	------------	---------------------------------------	--------------------------



CCC



GOST



C-TICK

[Explosion Protection Certificate](#)

[Special Test Certificate](#)

**Shipping Approval**



ABS



BUREAU VERITAS



DNV



GL



PRS

**other**

[Confirmation](#)

[Declaration of Conformity](#)



Profibus

[PROFINET-Certification](#)

[PROFISafe-Certification](#)

[other](#)

**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**Cax online generator:**


<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WW/view/en/3UF7935-0AA00-0/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3UF7935-0AA00-0](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UF7935-0AA00-0)

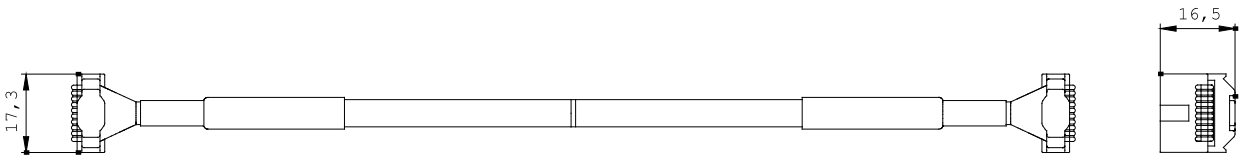

**last change:**

Feb 13, 2013