



DIGITAL MONITORING RELAY SPEED MONITORING,  
FOR IO-LINK FROM 0.1 TO 2200 RPM OVERSHOOT AND  
UNDERSHOOT ON DELAY TIME TRIPPING DELAY TIME  
HYSTERESIS 0.1 TO 99 RPM 1 CHANGE-OVER  
CONTACT,  
SPRING-LOADED TERMINAL

<b>Product function</b>	RPM monitoring relay	
<b>Measuring circuit:</b>		
<b>Adjustable response delay time</b>		
• when starting	s	0 ... 999.9
• with lower or upper limit violation	s	0 ... 999.9
<b>Adjustable response value revolution</b>	1/min	0 ... 2,200
<b>Input voltage / at the digital input 1</b>		
• initial value for signal<0>-recognition	V	0
• final value for signal<0>-recognition	V	1
• initial value for signal<1>-recognition	V	4.5
• final value for signal<1>-recognition	V	30
<b>Input current / at the digital input 2</b>		
• initial value for signal<0>-recognition	mA	0
• final value for signal<0>-recognition	mA	1.2
• initial value for signal<1>-recognition	mA	2.1
• final value for signal<1>-recognition	mA	8.2
<b>Design of the input / feedback input</b>		No
<b>Design of the sensor</b>		
• at the digital input 1 / connectable		PNP switching three-wire sensor or mechanical impulse contact with external DC supply (4.5 V ... 30 V)

• at the digital input 2 / connectable		2-conductor Namur sensor or mechanical impulse contact
<b>Input current / at the digital input 1 / maximum</b>	mA	50
<b>Pulse duration</b>	ms	5
<b>Pulse interval</b>	ms	5
<b>Number of sensor signals per revolution</b>		1 ... 10
<b>Switching hysteresis for rotational speed</b>	1/min	0 ... 99.9

<b>General technical details:</b>		
<b>Design of the display</b>		LCD
<b>Product function</b>		
• rotation speed monitoring		Yes
• standstill monitoring		No
• defect storage		Yes
• reset external		Yes
• self-reset		Yes
• manual RESET		Yes
• open-circuit or closed-circuit current principle		Yes
<b>Starting time / after the control supply voltage has been applied</b>	ms	500
<b>Response time / maximum</b>	ms	100
<b>Relative metering precision</b>	%	10
<b>Precision of digital display</b>		+/- 1 Digit
<b>Relative repeat accuracy</b>	%	1
<b>Voltage type / of control feed voltage</b>		DC
<b>Control supply voltage</b>		
• for DC		
• rated value	V	24 ... 24
<b>Operating range factor control supply voltage rated value</b>		
• for DC		0.75 ... 1.25
<b>Impulse voltage resistance / rated value</b>	kV	4
<b>Recorded real power</b>	W	2
<b>Protection class IP</b>		IP20
<b>Electromagnetic compatibility</b>		IEC 60947-1 / IEC 61000-6-2 / IEC 61000-6-4
<b>Resistance against vibration / according to IEC 60068-2-6</b>		1 ... 6 Hz: 15 mm, 6 ... 500 Hz: 2g
<b>Resistance against shock / according to IEC 60068-2-27</b>		sinusoidal half-wave 15g / 11 ms
<b>Installation altitude / at a height over sea level / maximum</b>	m	2,000
<b>Conductor-bound parasitic coupling BURST / according to IEC 61000-4-4</b>		2 kV
<b>Conductor-bound parasitic coupling conductor-earth SURGE / according to IEC 61000-4-5</b>		2 kV

<b>Conductor-bound parasitic coupling conductor-conductor SURGE / according to IEC 61000-4-5</b>		1 kV
<b>Electrostatic discharge / according to IEC 61000-4-2</b>		6 kV contact discharge / 8 kV air discharge
<b>Field-bound parasitic coupling / according to IEC 61000-4-3</b>		10 V/m
<b>Degree of pollution</b>		2
<b>Apparent power consumed</b> • at 24 V / for DC / maximum	V·A	4
<b>Ambient temperature</b> • during operating • during storage • during transport	°C	-25 ... +60 °C -40 ... +80 °C -40 ... +80
<b>Galvanic isolation</b> • between entrance and outlet • between the outputs • between the voltage supply and other circuits		Yes No Yes
<b>Suitability for use / safety-related circuits</b>		No
<b>Category / according to EN 954-1</b>		none
<b>Safety Integrity Level (SIL) / according to IEC 61508</b>		none

#### Communication:

<b>Type of voltage supply / via input/ output link master</b>		Yes
<b>IO-Link transfer rate</b>		COM2 (38,4 kBaud)
<b>Protocol / is supported / IO-Link protocol</b>		Yes
<b>Data volume</b> • of the address range of the outputs / with cyclical transfer • of the address range of the inputs / with cyclical transfer	byte byte	2 4
<b>Point-to-point cycle time / between master and IO-Link device / minimum</b>	ms	10

#### Mechanical design:

<b>Width</b>	mm	22.5
<b>Height</b>	mm	91
<b>Depth</b>	mm	103
<b>mounting position</b>		any
<b>Distance, to be maintained, to earthed part</b> • forwards • backwards • sideways • upwards • downwards	mm mm mm mm mm	0 0 0 0 0
<b>Distance, to be maintained, to the ranks assembly</b>		

• forwards	mm	0
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
• downwards	mm	0
<b>Distance, to be maintained, conductive elements</b>		
• forwards	mm	0
• backwards	mm	0
• sideways	mm	0
• upwards	mm	0
• downwards	mm	0
<b>Mounting type</b>		screw and snap-on mounting
<b>Product function / removable terminal for auxiliary and control circuit</b>		Yes
<b>Design of the electrical connection</b>		spring-loaded terminals
<b>Type of the connectable conductor cross-sections</b>		
• solid		2x (0.25 ... 1.5 mm <sup>2</sup> )
• finely stranded		
• with wire end processing		2 x (0.25 ... 1.5 mm <sup>2</sup> )
• without wire end processing		2x (0.25 ... 1.5 mm <sup>2</sup> )
• for AWG conductors		
• solid		2x (24 ... 16)
• stranded		2x (24 ... 16)

#### Outputs:

<b>Number of NO contacts / delayed switching</b>		0
<b>Number of NC contacts / delayed switching</b>		0
<b>Number of change-over switches / delayed switching</b>		1
<b>Current carrying capacity / of output relay</b>		
• at AC-15		
• at 230 V / at 50/60 Hz	A	3
• at 250 V / at 50/60 Hz	A	3
• at DC-13		
• at 24 V	A	1
• at 110 V	A	0.2
• at 125 V	A	0.2
• at 230 V	A	0.1
• at 250 V	A	0.1
<b>Operating current / at 17 V / minimum</b>	mA	5
<b>Continuous current / of the DIAZED fuse link of the output relay</b>	A	4

Thermal current / of the contact-affected switching element / maximum	A	5
Mechanical operating cycles as operating time / typical		10,000,000
Electrical operating cycles as operating time / at AC-15 / at 230 V / typical		100,000
Operating cycles / with 3RT2 contactor / maximum	1/h	5,000

#### Certificates/approvals:

##### General Product Approval



CCC



[Manufacturer declaration](#)



UL

##### Test Certificates

[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)

##### other

[Declaration of Conformity](#)

[other](#)

#### Further information:

##### Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/industrial-controls/catalogs>

##### Industry Mall (Online ordering system)

<http://www.siemens.com/industrial-controls/mall>

##### Cax online generator:




<http://www.siemens.com/cax>

##### Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WWW/view/en/3UG4851-2AA40/all>

##### Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=3UG4851-2AA40](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3UG4851-2AA40)

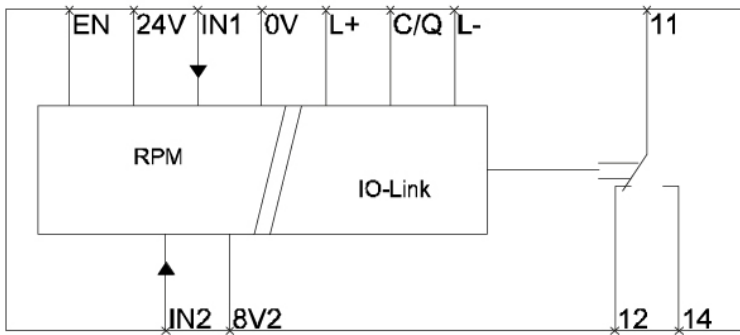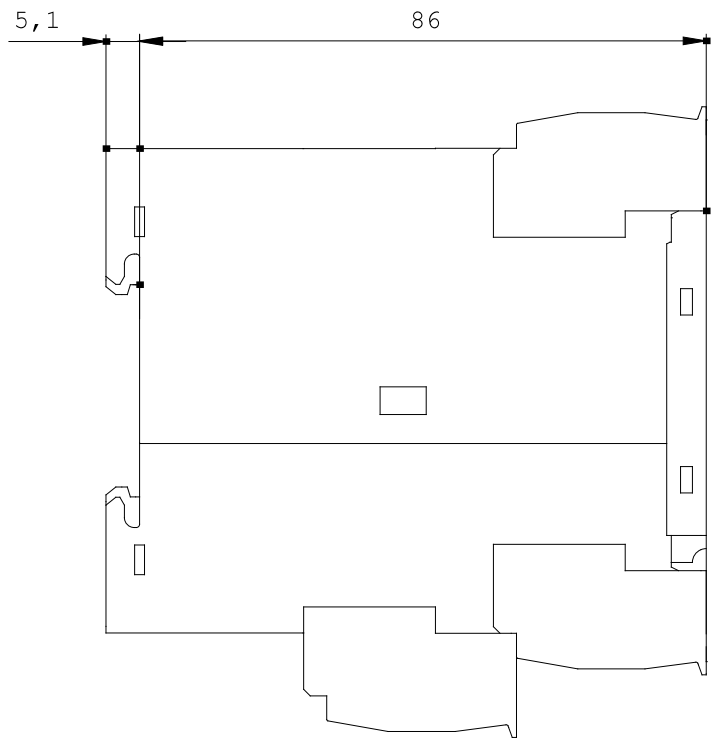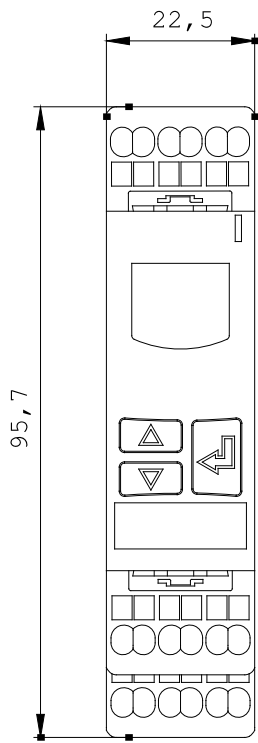

last change:

Jun 16, 2014