


REI-E-114I8S1-2B2500-H1181

Incremental Encoder

Efficiency Line

Features


- Flange with mounting element
- Hollow shaft, Ø 8 mm
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP64 on housing and shaft side
- -20...+70 °C
- Max. 4500 rpm (continuous operation 3000 rpm)
- 10...30 VDC
- Male connector, M12 x 1, 8-pole
- Push-pull, with inverted signals
- Pulse frequency max. 300 kHz
- 2500 pulses per revolution

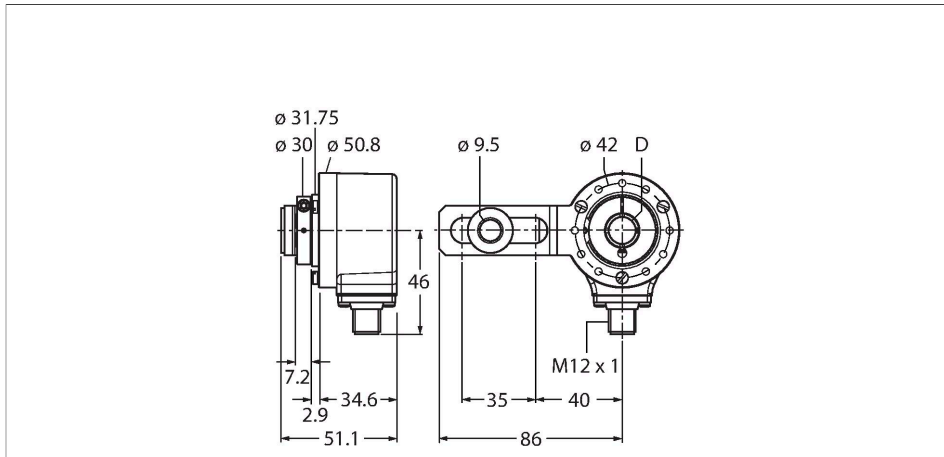

Technical data

| | |
|---|---------------------------------------|
| Type | REI-E-114I8S1-2B2500-H1181 |
| Ident. no. | 100011668 |
| Measuring principle | Optical |
| Max. Rotational Speed | 4500 rpm |
| Moment of inertia of the rotor | 6 x 10 ⁻⁶ kgm ² |
| Starting torque | < 0.05 Nm |
| Ambient temperature | -20...+70 °C |
| Operating voltage | 10...30 VDC |
| No-load current | ≤ 100 mA |
| Output current | ≤ 30 mA |
| Short-circuit protection | yes |
| Wire breakage/Reverse polarity protection | yes |
| Output type | Incremental |
| Resolution, incremental | 2500 ppr |
| Pulse frequency max. | 300 kHz |
| Signal level high | min. U _B - 1 V |
| Signal level low | max. 0.5 V |
| Output function | Push-Pull/HTL, with inverted signals |
| Design | Hollow shaft |
| Flange type | Flange with mounting element |
| Flange diameter | Ø 50.8 mm |
| Shaft Type | Hollow shaft |
| Shaft diameter D [mm] | 8 |

Wiring diagram

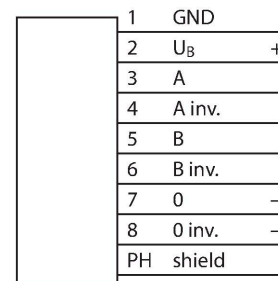

Technical data

| | |
|-------------------------------------|--|
| Shaft material | Stainless steel |
| Housing material | Die-cast zinc |
| Electrical connection | Connector, M12 × 1 |
| | 8-pin |
| Axial shaft load | 40 N |
| Radial shaft load | 80 N |
| Vibration resistance (EN 60068-2-6) | 10 g (100 m/s ²), 10...2000 Hz |
| Shock resistance (EN 60068-2-27) | 1000 m/s ² , 6 ms |
| Protection class | IP64 |
| Protection class shaft | IP64 |

Accessories

| | |
|---------------------|--|
| <p>RME-1</p> | <p>1544612</p> <p>Stainless steel stator coupling for hollow shaft encoders, reference diameter, 65 mm, for highly dynamic, standard applications with axial and radial play</p> |
| <p>RME-2</p> | <p>1544613</p> <p>Stainless steel stator coupling for hollow shaft encoders, reference diameter 63 mm, for applications with high demands on accuracy</p> |
| <p>RME-4</p> | <p>1544615</p> <p>Stainless steel mounting panel for hollow shaft encoders, reference diameter 80...170 mm, for low dynamic applications with axial and radial play</p> |
| <p>RME-7</p> | <p>1544618</p> <p>Stainless steel stator coupling for hollow shaft encoders, reference diameter 65 mm, for highly dynamic applications with axial and radial play</p> |
| <p>RME-8</p> | <p>1544619</p> <p>Stainless steel mounting panel for hollow shaft encoders, reference diameter 65...91.5 mm, for applications with axial and radial play at constant rotation speed</p> |
| <p>RME-9</p> | <p>1544620</p> <p>Stainless steel mounting panel for hollow shaft encoders, reference diameter 64.5 mm, for low dynamic applications with axial and radial play</p> |

RME-13


1544624



Plastic mounting element for hollow shaft encoders, pitch diameter 42 mm, for applications with limited axial play, low dynamics and limited mounting space

RME-14

1544625

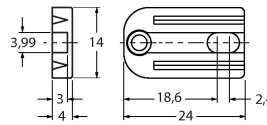

Plastic mounting element for hollow shaft encoders, pitch diameters 44 mm, 60 mm, 63 mm, 65 mm, for low dynamic applications with high axial play.

Wiring accessories

Dimension drawing

Type

Ident. no.

RKC8T-2/TXL

6625142

Connection cable, female M12, straight, 8-pin, cable length: 2 m, sheath material: PUR, black; cULus approval; other cable lengths and qualities available, see www.turck.com

