


REI-E-114I10S1-2B5000-H1181

Incremental Encoder

Efficiency Line

Features

- Flange with mounting element
- Hollow shaft, Ø 10 mm
- Optical measuring principle
- Shaft material: stainless steel
- Protection class IP64 on housing and shaft side
- -20...+70 °C
- Max. 4500 rpm (continuous operation 3000 rpm)
- 10...30 VDC
- Male connector, M12 x 1, 8-pole
- Push-pull, with inverted signals
- Pulse frequency max. 300 kHz
- 5000 pulses per revolution

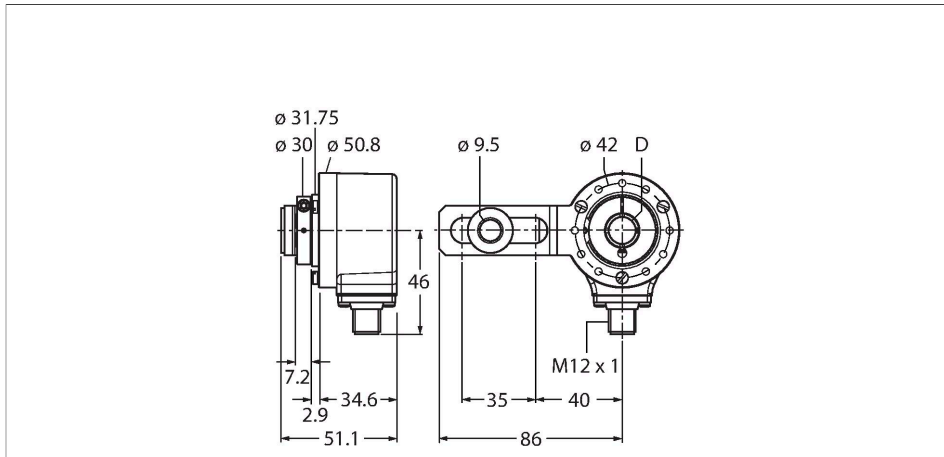

Technical data

| | |
|---|---------------------------------------|
| Type | REI-E-114I10S1-2B5000-H1181 |
| Ident. no. | 100011680 |
| Measuring principle | Optical |
| Max. Rotational Speed | 4500 rpm |
| Moment of inertia of the rotor | 6 x 10 ⁻⁶ kgm ² |
| Starting torque | < 0.05 Nm |
| Ambient temperature | -20...+70 °C |
| Operating voltage | 10...30 VDC |
| No-load current | ≤ 100 mA |
| Output current | ≤ 30 mA |
| Short-circuit protection | yes |
| Wire breakage/Reverse polarity protection | yes |
| Output type | Incremental |
| Resolution, incremental | 5000 ppr |
| Pulse frequency max. | 300 kHz |
| Signal level high | min. U _B - 1 V |
| Signal level low | max. 0.5 V |
| Output function | Push-Pull/HTL, with inverted signals |
| Design | Hollow shaft |
| Flange type | Flange with mounting element |
| Flange diameter | Ø 50.8 mm |
| Shaft Type | Hollow shaft |
| Shaft diameter D [mm] | 10 |

Wiring diagram



Technical data


| | |
|-------------------------------------|--|
| Shaft material | Stainless steel |
| Housing material | Die-cast zinc |
| Electrical connection | Connector, M12 × 1 |
| | 8-pin |
| Axial shaft load | 40 N |
| Radial shaft load | 80 N |
| Vibration resistance (EN 60068-2-6) | 10 g (100 m/s ²), 10...2000 Hz |
| Shock resistance (EN 60068-2-27) | 1000 m/s ² , 6 ms |
| Protection class | IP64 |
| Protection class shaft | IP64 |

Accessories

| | |
|---------------------|--|
| <p>RME-1</p> | <p>1544612</p> <p>Stainless steel stator coupling for hollow shaft encoders, reference diameter, 65 mm, for highly dynamic, standard applications with axial and radial play</p> |
| <p>RME-2</p> | <p>1544613</p> <p>Stainless steel stator coupling for hollow shaft encoders, reference diameter 63 mm, for applications with high demands on accuracy</p> |
| <p>RME-4</p> | <p>1544615</p> <p>Stainless steel mounting panel for hollow shaft encoders, reference diameter 80...170 mm, for low dynamic applications with axial and radial play</p> |
| <p>RME-7</p> | <p>1544618</p> <p>Stainless steel stator coupling for hollow shaft encoders, reference diameter 65 mm, for highly dynamic applications with axial and radial play</p> |
| <p>RME-8</p> | <p>1544619</p> <p>Stainless steel mounting panel for hollow shaft encoders, reference diameter 65...91.5 mm, for applications with axial and radial play at constant rotation speed</p> |
| <p>RME-9</p> | <p>1544620</p> <p>Stainless steel mounting panel for hollow shaft encoders, reference diameter 64.5 mm, for low dynamic applications with axial and radial play</p> |

RME-13


1544624

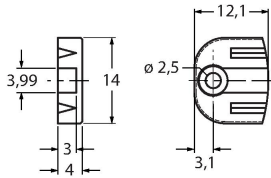

Plastic mounting element for hollow shaft encoders, pitch diameter 42 mm, for applications with limited axial play, low dynamics and limited mounting space


RME-14

1544625

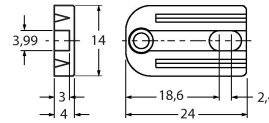

Plastic mounting element for hollow shaft encoders, pitch diameters 44 mm, 60 mm, 63 mm, 65 mm, for low dynamic applications with high axial play.

Wiring accessories
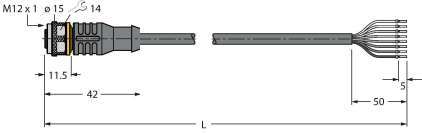
| Dimension drawing | Type | Ident. no. | |
|---|-------------|------------|--|
|  | RKC8T-2/TXL | 6625142 | Connection cable, female M12, straight, 8-pin, cable length: 2 m, sheath material: PUR, black; cULus approval; other cable lengths and qualities available, see www.turck.com |