


# FCI-D03A4-NA-H1141/M16


## Flow Monitoring – Inline Sensor with Separate Processor

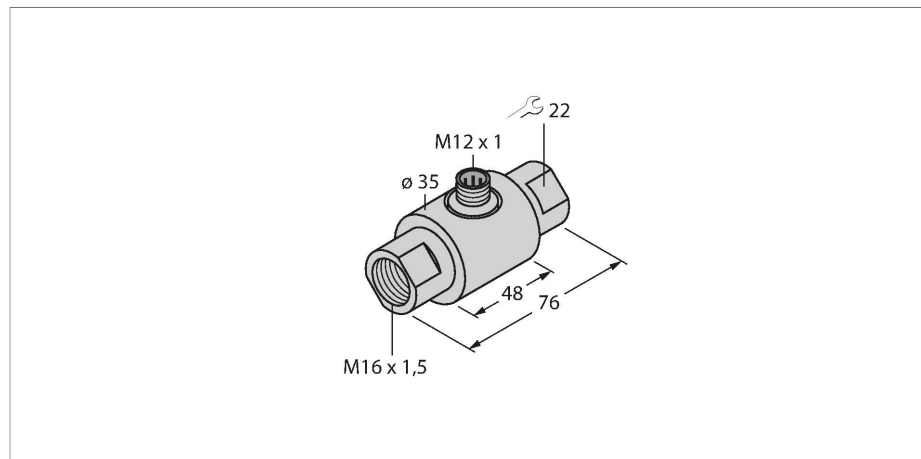

### Features

- Flow sensor for liquid media
- Calorimetric principle
- Adjustment via potentiometer on processor
- Status indicated via LED chain on signal processor
- Connector device, M12 × 1
- 4-wire connection to the processor

### Wiring diagram

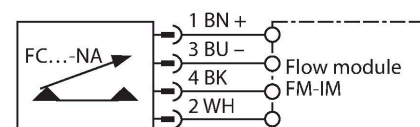

### Technical data

Ident. no.	6870633
Type	FCI-D03A4-NA-H1141/M16
<b>Mounting</b>	<b>Inline sensor</b>
Flow operating range	0,005...0,15 l/min
Stand-by time	typ. 8 s (2...15 s)
Switch-on time	typ. 2 s (1...15 s)
Switch-off time	typ. 2 s (1...15 s)
Temperature jump, response time	max. 12 s
Temperature gradient	≤ 250 K/min
Medium temperature	-20...+80 °C
Ambient temperature	-20...+70 °C
Protection class	IP67
Design	Inline
<b>Housing material</b>	<b>Stainless steel, V4A (1.4571)</b>
Sensor material	Stainless steel, V4A (1.4571)
Electrical connection	Connector, M12 × 1
Process Pressure	10 bar
Process connection	M16 × 1.5

### Functional principle

The function of the inline flow sensors is based on the thermo-dynamic principle. Heat is generated in a measuring tube and absorbed by the flowing medium. The transported heat loss is thus a measure of the flow speed. Thus TURCK's wear-free flow sensors reliably monitor the flow of gaseous and liquid media. A low pressure drop and fast response to flow rate variations are the outstanding features of these devices.