


PZE 9 24VDC 8n/o 1n/c

774150

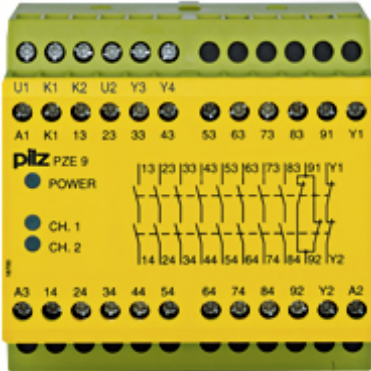

Contact expansion, inputs: 1/2-channel wiring with/without detection of shorts across contacts, outputs: 8 N/O, 1 N/C, UB 24 V DC,width: 90 mm, contact block for contact expansion in connection with safety-related control components.

Technical details

| | |
|--|---|
| Certifications: | CE;cULus Listed;EAC (Eurasian);TÜV;CCC |
| Application options: | Instantaneous contact expansion |
| Operating modes: | Single-channel;Dual-channel;Detection of shorts across contacts;without detection of shorts across contacts |
| Standards: | EN 60204-1;EN 62061;EN ISO 13849-1;VDE 0113-1 |
| Supply voltage (V): | 24,0 |
| Supply voltage type: | DC |
| Terminal style: | fixed |
| Terminal type: | Screw terminal |
| Number of instantaneous safety contacts: | 8 |
| Number of delayed safety contacts: | 0 |
| Number of auxiliary contacts: | 1 |
| Max. current at DC13 I (6 cycles/min): | 7.0 A |
| Voltage at AC15: | 230 V |
| Width dimension: | 90.0 mm |
| Height dimension: | 87.0 mm |
| Depth dimension: | 121.0 mm |
| Gross weight: | 460 g |
| Net weight: | 450 g |
| Ambient temperature: | -10 - 55 °C |