


## PNOZ X9P 24DC 24-240VACDC 7no 2nc 2so

777606

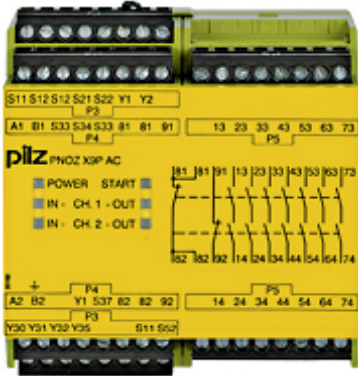

Safety relay (standalone), inputs: 1/2-channel wiring with/without detection of shorts across contacts, outputs: 7 N/O, 2 N/C, 2 SC automatic/monitored start, UB 24 - 240 V AC/DC, width: 90 mm, plug-in screw terminals, monitoring of E-STOP, safety gates, light guard.

### Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;CCC
Application options:	Instantaneous E-STOP monitoring;Limit switch;Light beam device mon. Type 2 with t/p;Light beam device mon. Type 2 w/o t/p;Light beam device mon. Type 4;Safety gate monitor
Operating modes:	Single-channel;Automatic reset;Dual-channel;Manual reset;Detection of shorts across contacts;Monitored manual reset;without detection of shorts across contacts
Product standard:	EN 60947-5-1
Standards:	EN 60204-1;EN 62061;EN ISO 13849-1;VDE 0113-1
Supply voltage (V):	24,0 - 240,0
Supply voltage type:	AC/DC
Supply voltage type 2:	DC
Supply voltage 2 (V):	24
Terminal style:	Plug-in
Terminal type:	Screw terminal
Number of instantaneous safety contacts:	7
Number of delayed safety contacts:	0
Number of auxiliary contacts:	2
Number of semiconductor outputs:	2
Stop category:	0
Max. current at DC13 I (6 cycles/min):	7.0 A
Max. current at AC15:	5.0 A

Width dimension:	90.0 mm
Height dimension:	94.0 mm
Depth dimension:	121.0 mm
Gross weight:	610 g
Net weight:	600 g
Ambient temperature:	-10 - 55 °C

## Optional accessories



374281

PNOZ X Set plug in screw terminals P3+P4



374282

PNOZ X Set plug in screw terminals P5+P5