


PZE 9P 24VACDC 24-240VACDC 8n/o 1n/c

777148

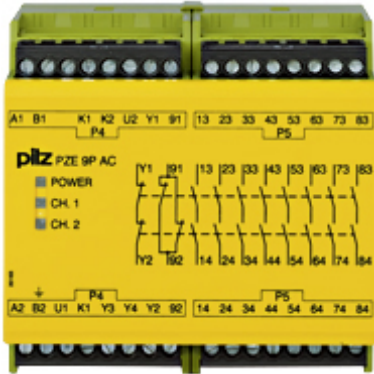

Contact expansion Inputs: 1-/2-channel wiring with/without detection of shorts across contacts Outputs: 8 N/O, 1 N/C. UB 24 - 240 V AC/DC, width: 90 mm, plug-in terminals of screw type. Contact block for contact expansion in connection with safety-related control components.

Technical details

Certifications:	CE;cULus Listed;EAC (Eurasian);TÜV;CCC
Application options:	Instantaneous contact expansion
Operating modes:	Single-channel;Dual-channel;Detection of shorts across contacts;without detection of shorts across contacts
Standards:	EN 60204-1;EN 62061;EN ISO 13849-1;VDE 0113-1
Supply voltage (V):	24,0 - 240,0
Supply voltage type:	AC/DC
Supply voltage 2 (V):	24
Supply voltage type 2:	AC/DC
Terminal style:	Plug-in
Terminal type:	Screw terminal
Number of instantaneous safety contacts:	8
Number of delayed safety contacts:	0
Number of auxiliary contacts:	1
Max. current at DC13 I (6 cycles/min):	7.0 A
Voltage at AC15:	230 V
Width dimension:	90.0 mm
Height dimension:	87.0 mm
Depth dimension:	121.0 mm
Gross weight:	465 g
Net weight:	455 g

Ambient temperature:

-10 - 55 °C

Optional accessories



374281

PNOZ X Set plug in screw terminals P3+P4



374282

PNOZ X Set plug in screw terminals P5+P5