


PSEN op4B-L-050/1

630808

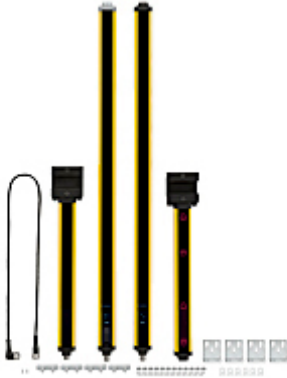

Set from light guard (Type 4, PL e, body protection), bracket and mutingarm L-type in accordance with DIN EN 61496, Type 4, 500 mm, connector M12, transmitter: 4-pin and 5-pin, receiver: 5-pin and 8-pin, connection cable not supplied with the device.

## Technical details

Certifications:	CE;cULus Listed;TÜV
Number of beams:	2
Resolution of safety device:	515 mm
Height of protected field:	515 mm
Operating range (m):	0,5 - 3,0
Reaction time:	14.00 ms
Number of OSSD outputs:	2
Supply voltage (V):	24,0
Supply voltage type:	DC
Protection type, housing:	IP65
Application in accordance with:	EN 61496-1;IEC 61496-2
Width dimension:	35.0 mm
Height dimension:	653.0 mm
Depth dimension:	41.2 mm
Gross weight:	4700 g
Net weight:	4200 g
Ambient temperature:	-10 - 55 °C