


PMI 526

264526

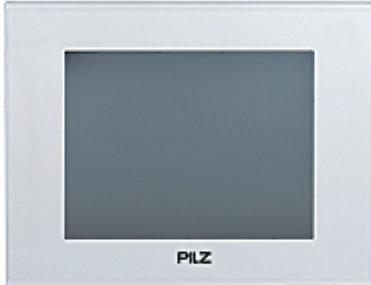

PMIopen - Operator panel with 10.4" touchscreen, open HMI platform for every common visualisations software, configurable with PMI Assistant.

## Datos técnicos

Certificaciones:	CE;cULus Listed;EAC (Eurasian)
Resolución:	800 x 600
Tipo de display:	TFT
Diagonal de display:	10.4 Zoll
Intensidad de color:	65536
Pantalla táctil:	resistiva
Posibles aplicaciones PMI:	PSS/PSSu/PNOZmulti;Diagnóstico PNOZmulti;Diagnóstico PSS/SafetyBUS p
Número de interfaces Ethernet:	1
Número de interfaces RS 232:	1
Tensión alimentación (V):	24,0
Tipo de tensión de alimentación:	DC
Sistema operativo:	Windows Embedded CE 6.0
Dimensión Ancho:	317.0 mm
Dimensión de altura:	243.0 mm
Dimensión Profundidad:	62.5 mm
Peso bruto:	3610 g
Peso neto:	2227 g
Temperatura ambiente:	0 - 50 °C

## Accesorios opcionales




261905

RT-Licence PVIS OPC-Srv f.PMI, PtoP



261906

RT-Licence PVIS OPC-Srv f.PMI, 8 devices



269700

power connector PMI (3 pcs)



269701

seal for PMlvisu, PMlopen, PMlmicro



310300

Serial programming cable



313100

SD Memory Card 512MB

265010

Zenon Operator Dev 1024

265210

Zenon Operator RT PMI

265220

Zenon Operator 7.20 RT PMI



THE SPIRIT OF SAFETY

265020

Zenon Operator 7.20 Dev 1024

---