



Figure similar

### MLFB-Ordering data

6SL3310-1PE34-6AA0

Client order no. :

Order no. :

Offer no. :

Remarks :

Item no. :

Consignment no. :

Project :

Rated data	General tech. specifications
------------	------------------------------

### Input

Number of phases	3 AC
Line voltage	380 ... 480 V $\pm$ 10 %
Line frequency	47 ... 63 Hz
Rated current (LO)	459.00 A
Rated current (HO)	375.00 A

### Output

Number of phases	3 AC
Rated voltage	400 V
Rated current (LO)	450.00 A
Rated current (HO)	368.00 A
Max. output current	608.00 A
Rated power IEC 400V (LO)	250.00 kW
Rated power NEC 480V (LO)	300.00 hp
Rated power IEC 400V (HO)	200.00 kW
Rated power NEC 480V (HO)	200.00 hp
Pulse frequency	2 kHz
Output frequency for vector control	0 ... 100 Hz
Output frequency for V/f control	0 ... 100 Hz

### Overload capability

#### Low Overload (LO)

1.35  $\times$  base load current IL (i.e., 135 % overload) for 3 s or 1.1  $\times$  base load current IL (i.e., 110 % overload) for 60 s in a 300 s cycle time

#### High Overload (HO)

1.5  $\times$  base load current IH (i.e., 150 % overload) for 60 s in a 300 s cycle time

Power factor $\lambda$	0.93
Offset factor $\cos \phi$	0.96
Efficiency $\eta$	0.98
Sound pressure level (1m)	71 dB
Power loss	4.40 kW
Filter class (integrated)	-

### Ambient conditions

Cooling	Internal air cooling
Cooling air requirement	0.210 m <sup>3</sup> /s (7.416 ft <sup>3</sup> /s)
Installation altitude	1000 m (3280.84 ft)

### Ambient temperature

Operation LO	0 ... 40 °C (32 ... 104 °F)
Operation HO	0 ... 50 °C (32 ... 122 °F)
Transport	-25 ... 55 °C (-13 ... 131 °F)
Storage	-25 ... 55 °C (-13 ... 131 °F)

### Relative humidity

Max. operation	95 % RH, condensation not permitted
----------------	-------------------------------------



Figure similar

MLFB-Ordering data


6SL3310-1PE34-6AA0

### Mechanical data

Degree of protection	IP20 / UL open type
Size	GX
Net weight	107.00 kg (235.89 lb)
Width	452 mm (17.80 in)
Height	1447 mm (56.97 in)
Depth	327 mm (12.87 in)

### Converter losses to EN 50598-2\*

Efficiency class	IE2
Comparison with the reference converter (90% / 100%)	-63.90 %

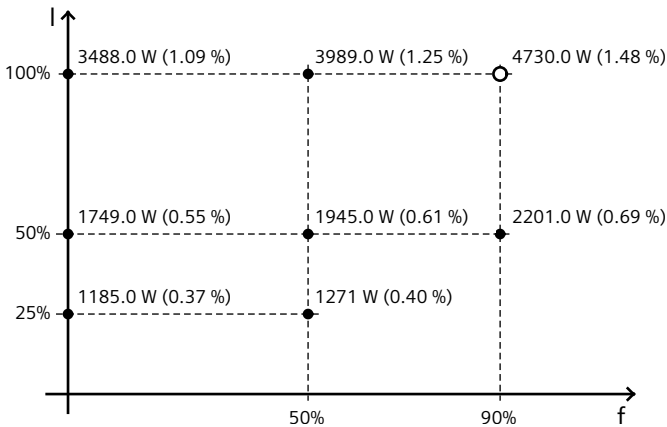

The percentage values show the losses in relation to the rated apparent power of the converter.

The diagram shows the losses for the points (as per standard EN 50598) of the relative torque generating current (I) over the relative motor stator frequency (f). The values are valid for the basic version of the converter without options/components.

\*converted values

### Connections

#### Line side

Version	M12 screw
Conductor cross-section	185.00 ... 240.00 mm <sup>2</sup> (AWG -5)

#### Motor end

Version	M12 screw
Conductor cross-section	150.00 ... 240.00 mm <sup>2</sup> (AWG -4)

#### DC link (for braking resistor)

Conductor cross-section	35.00 mm <sup>2</sup> (AWG 2)
-------------------------	-------------------------------

#### Max. motor cable length

Shielded	100 m (328.08 ft)
Unshielded	200 m (656.17 ft)

### Standards

Compliance with standards	UL, cUL, CE, C-Tick (RCM), kc, GOST-R (EAC)
---------------------------	---

CE marking	Low-voltage directive 2006/95/EC
------------	----------------------------------