


WITHDRAWABLE CIRCUIT BREAKER WITH GUIDE
 FRAME 3-POLE, SIZE II, IEC IN=2500A TO 690V,
 AC50/60HZ ICU=66KA AT 500V REAR CONNECTION
 HORIZONTAL

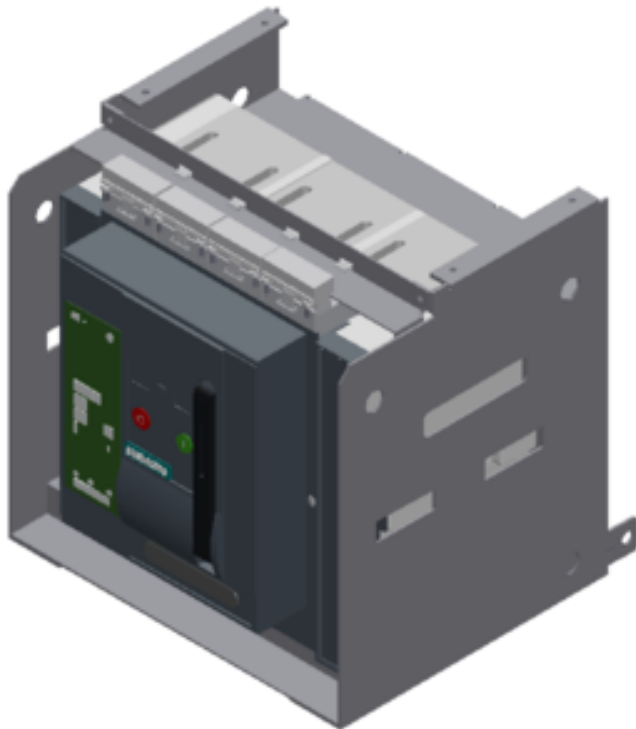

Model		
product brand name		SENTRON
Product designation		ACB
Design of the operating mechanism		Pushbutton
Type of the driving mechanism		Manual/motorized operating mechanism with mechanical and electrical closing
Type of the driving mechanism / motor drive		Yes
Design of the overcurrent release		ETU25B

General technical data		
Number of poles		3
Size of the circuit-breaker		2
Electrical endurance (switching cycles) / typical		15 000
Usage category		B
circuit-breaker / Design		3WL1225
Mechanical service life (switching cycles) / typical		15 000

Voltage		
Rated insulation voltage Ui	V	1 000
Insulation voltage / rated value	V	1 000

Protection class		
Protection class IP		IP20
Protective function of the overcurrent release		LSI
Dissipation		
Power loss [W]		
<ul style="list-style-type: none"> for rated value of the current / at AC / in hot operating state / per pole 	W	173.3
<ul style="list-style-type: none"> maximum 	W	520
Electricity		
Continuous current / rated value	A	2 500
Adjustable pick-up value current		
<ul style="list-style-type: none"> of instantaneous short-circuit trip unit / initial value 	A	50 000
<ul style="list-style-type: none"> of instantaneous short-circuit trip unit / Full-scale value 	A	50 000
Short-time current resistance (I _{cw})		
<ul style="list-style-type: none"> limited to 0.5 s / rated value 	kA	66
<ul style="list-style-type: none"> limited to 1 s / rated value 	kA	55
<ul style="list-style-type: none"> limited to 2 s / rated value 	kA	39
<ul style="list-style-type: none"> limited to 3 s / rated value 	kA	32
Main circuit		
Operating frequency		
<ul style="list-style-type: none"> 1 / rated value 	Hz	50
<ul style="list-style-type: none"> 2 / rated value 	Hz	60
Operating voltage		
<ul style="list-style-type: none"> at AC / at 50/60 Hz / rated value 	V	690
Operating current		
<ul style="list-style-type: none"> at 40 °C / rated value 	A	2 500
<ul style="list-style-type: none"> at 50 °C / rated value 	A	2 500
<ul style="list-style-type: none"> at 55 °C / rated value 	A	2 500
<ul style="list-style-type: none"> at 60 °C / rated value 	A	2 500
<ul style="list-style-type: none"> at 65 °C / rated value 	A	2 500
<ul style="list-style-type: none"> at 70 °C / rated value 	A	2 280
Auxiliary circuit		
Number of NC contacts / for auxiliary contacts		2
Number of NO contacts / for auxiliary contacts		2
Suitability		
Suitability for use		Plant / motor protection
Product details		
Product component		

• Trip indicator		Yes
• Voltage trigger		No
• undervoltage release		Yes
Product extension / optional / motor drive		No

Product function

Product function		
• Ground fault protection		No

Display and operation

Display version		without display
------------------------	--	-----------------

Short circuit

Operational short-circuit current breaking capacity (Ics)		
• at 415 V / rated value	kA	66
• at 500 V / rated value	kA	66
• at 690 V / rated value	kA	50
Maximum short-circuit current breaking capacity (Icu)		
• at 415 V / rated value	kA	66
• at 500 V / rated value	kA	66
• at 690 V / rated value	kA	50

Connections

Arrangement of electrical connectors / for main current circuit		Main terminal on the rear horizontal
Type of electrical connection / for main current circuit		busbar connection

Mechanical Design

Height	mm	465.5
Width	mm	460
Depth	mm	456
Mounting type		drawer unit

Environmental conditions

Ambient temperature		
• during operation / minimum	°C	-20
• during operation / maximum	°C	70
• during storage / minimum	°C	-40
• during storage / maximum	°C	70

Certificates

Equipment marking		
• acc. to DIN EN 61346-2		Q
• acc. to DIN EN 81346-2		Q

General Product Approval	Declaration of Conformity	Test Certificates
--------------------------	---------------------------	-------------------



CCC



VDE



EG-Konf.

[spezielle Prüfbescheinigungen](#)
[n](#)

[sonstig](#)

Shipping Approval



ABS



BUREAU VERITAS



GL



LRS



PRS



RMRS

other

[Umweltbestätigung](#)

[sonstig](#)

Further information

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/3WL12252CB364AN2>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/3WL12252CB364AN2/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=3WL12252CB364AN2

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

last modified:

12.04.2016