



SAFETY TRANSFORMER,  
40VA PRIM 230V AC,50HZ,  
SEK 12V,16V,24V,32V AC WITH PTC PROT.,5MW

Similar to image

#### Technical data:

Input voltage	V	230
Design of the transformer		Safety transformer
Number of pitch units for width		5
Product function / thermoprotection		Yes
Characteristic feature of the output / short-circuit protected		Yes
Type of fixing/fixation / series installation		Yes
Active power loss / maximum	W	8.1
Suitability for integration / flush mounting		No
Output current / maximum	A	3.3
4		No
Output voltage / _1 / rated value	V	12
Output voltage / _2 / rated value	V	16
Output voltage / _3 / rated value	V	24
Output current / _1 / rated value	A	3.3
Output current / _2 / rated value	A	2.5
Output current / _3 / rated value	A	1.6
Length	mm	90
Width	mm	90

Height	mm	64
Active power supplied / maximum	W	40
Suitability for integration / surface-mounted installation		No

**Certificates/approvals:**

General Product Approval

Declaration of Conformity



**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/lowvoltage/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/lowvoltage/mall>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**


<http://support.automation.siemens.com/WW/view/en/4AC3740-1/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=4AC3740-1](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=4AC3740-1)

**CAX-Online-Generator**

<http://www.siemens.com/cax>

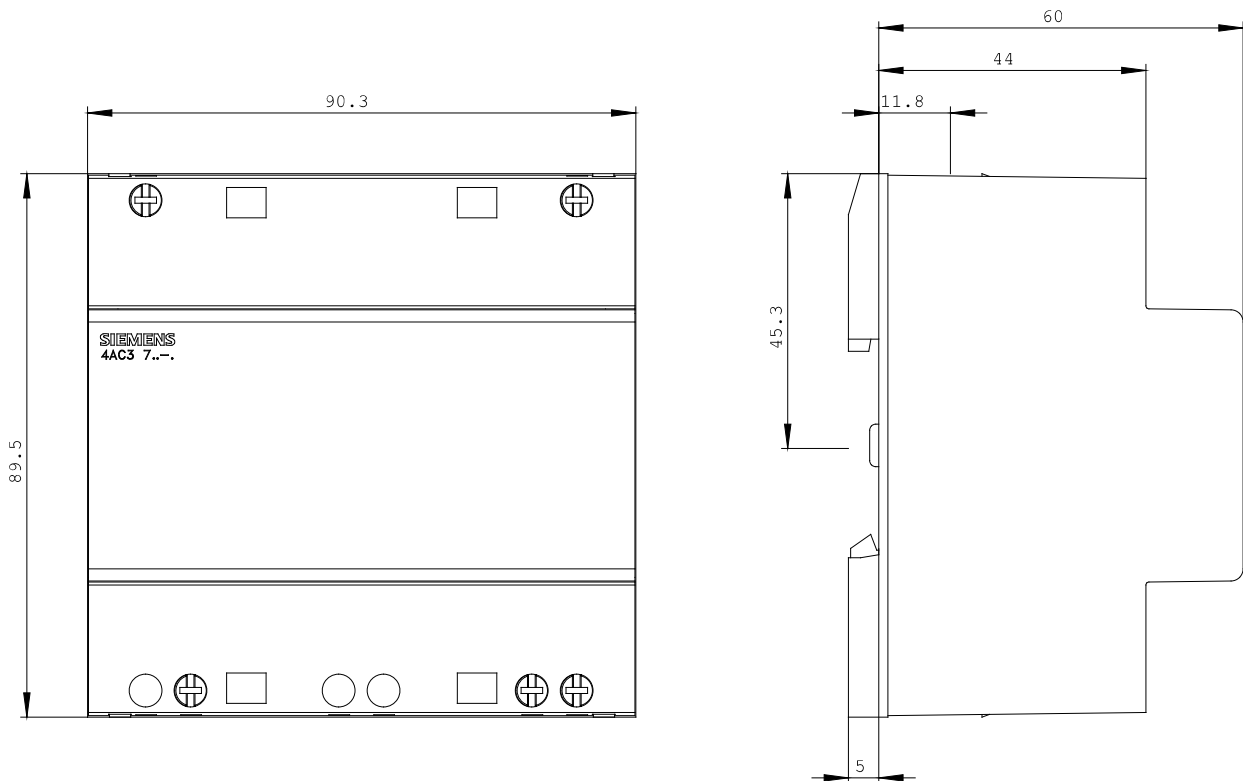

last change:

Feb 17, 2013