



CIRCUIT BREAKER 230/400V 10KA, 1POLE, C, 13A

Similar to image

Technical data:

product brand name		SENTRON
mounting position		any
Height	mm	90
Width	mm	18
Depth	mm	76
Mounting depth	mm	70
Current / for AC / rated value	A	13
Tripping characteristic class		C
Supply voltage		
• for AC / rated value	V	400
• with single-phase operation / with AC / rated value	V	230
• with multi-phase operation / with AC / rated value	V	400
Supply voltage frequency / rated value	Hz	50
Operating voltage		
• minimum	V	24
• with single-phase operation / with AC / maximum	V	250
• with multi-phase operation / with AC / maximum	V	440
• for DC / rated value / maximum	V	60

Number of poles		1
Number of poles / note		1P
Switching capacity current		
• in accordance with IEC 60947-2 / rated value	kA	10
• acc. to EN 60898 / rated value	kA	10
Active power loss / at rated value current / with AC / in warm operating state / per pole	W	1.54
Number of width units		1
Product feature / sealable		Yes
Protection class IP		IP20, with connected conductors
Degree of pollution		2
Influence of the surrounding temperature		+55 °C, max. 95% humidity
Ambient temperature	°C	-25 ... +55
Ambient temperature / during storage	°C	-40 ... +75
Mechanical operating cycles as operating time / typical		10,000
Product equipment / touch-protection		Yes
Type of voltage		AC/DC
Insulation voltage		
• with single-phase operation / with AC / rated value	V	440
• with multi-phase operation / with AC / rated value	V	440
Conductor cross-section that can be connected		
• solid	mm ²	0.75 ... 35
• multibrin	mm ²	0.75 ... 35
• finely stranded		
• with wire end processing	mm ²	0.75 ... 25
Tightening torque		
• with screw-type terminals	N-m	2.5 ... 3
Product feature		
• silicon-free		Yes
• halogen-free		Yes
Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30		6
Reference code / according to DIN EN 61346-2		F
Item designation / according to DIN EN 81346-2		F

Certificates/approvals:

General Product Approval

Declaration of
Conformity

other



[other](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SL4113-7>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SL4113-7/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SL4113-7

CAx-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

Datanorm [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

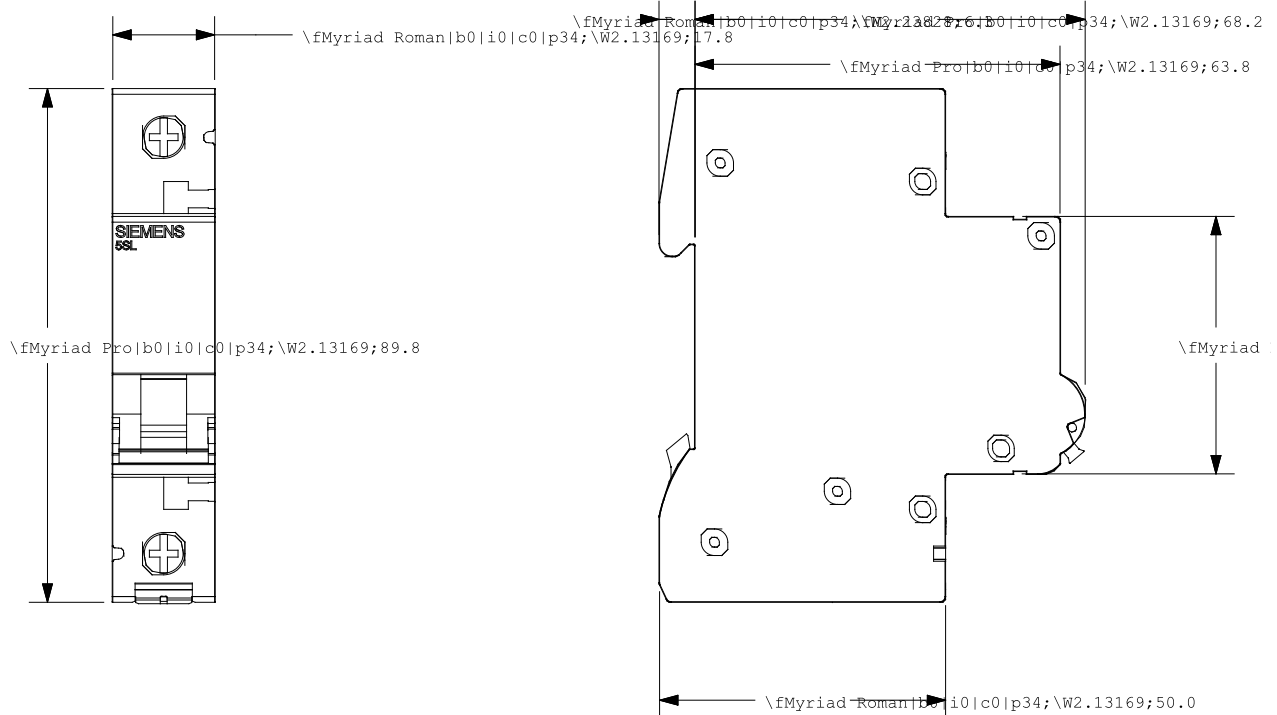

last change:

Aug 12, 2014