


• miniature fuse		No
• Lettering field		No
• integrated / Fluorescent materials		No
transversely connectable / lockable		No
Design of the cover		complete enclosure
Material		thermoplastic
Appearance		shiny
Number of units		2
Surface processing		others
Product feature / halogen-free		Yes
Release fault-current / rated value	mA	10,000
order of contacts / diagonal		No
Labeling / of socket outlet		without imprint
Operating current / rated value	A	16
Operating frequency	Hz	50 ... 50
Operating voltage / nominal value	V	230
Material / of the enclosure		plastic
Protection class IP		IP21
Number of socket outlets / switchable		0
Product feature / transparent		No
Product component / integrated		
• functional lighting		No
• orientation lighting		No
Design of the phase tap		Without

Certificates/approvals:

General Product Approval	Test Certificates	other
	Special Test Certificate	Type Test Certificates/Test Report
		Environmental Confirmations

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5SM1920-5>


Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5SM1920-5/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SM1920-5

Tender specifications
[Datanorm](#) [GAEB81](#) [GAEB83](#) [RTF](#) [TXT](#)

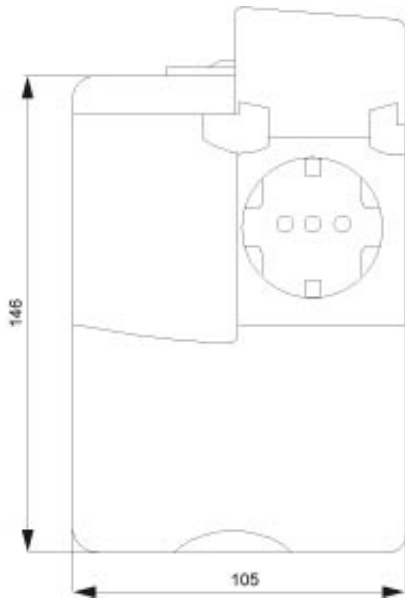

last change:

Jul 28, 2014