



UNDER-VOLTAGE RELEASE F.MOUNT.,
F. LS-SWITCH T=70MM AC 230V,
WITH 6 TERMINALS

Similar to image

Technical data:

Number of NC contacts		0
Number of change-over switches		0
Number of NO contacts		2
Design of the electrical connection		screw-type terminals
Switching function / slow-operating/instantaneous contact		No
Type of current / for actuation		AC
Control supply voltage		
<ul style="list-style-type: none"> • at 50 Hz / at AC <ul style="list-style-type: none"> • rated value • at 60 Hz / at AC <ul style="list-style-type: none"> • rated value 	V	230 ... 230
	V	230 ... 230
Suitability for use		
<ul style="list-style-type: none"> • circuit breaker • load switch 		No
		No
Suitability for integration		
<ul style="list-style-type: none"> • motor protection switch • overload relay 		No
		No

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5ST3040>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/5ST3040/all>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3040

CAX-Online-Generator

<http://www.siemens.com/cax>

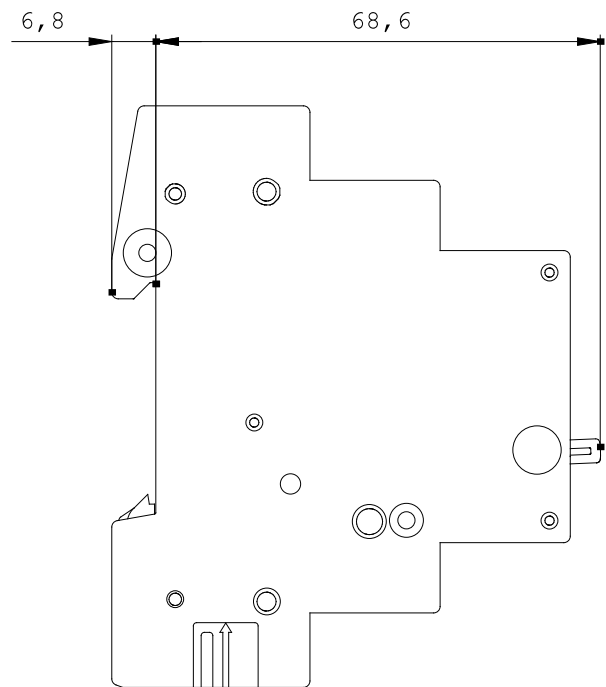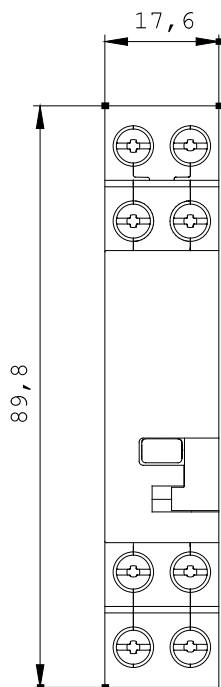

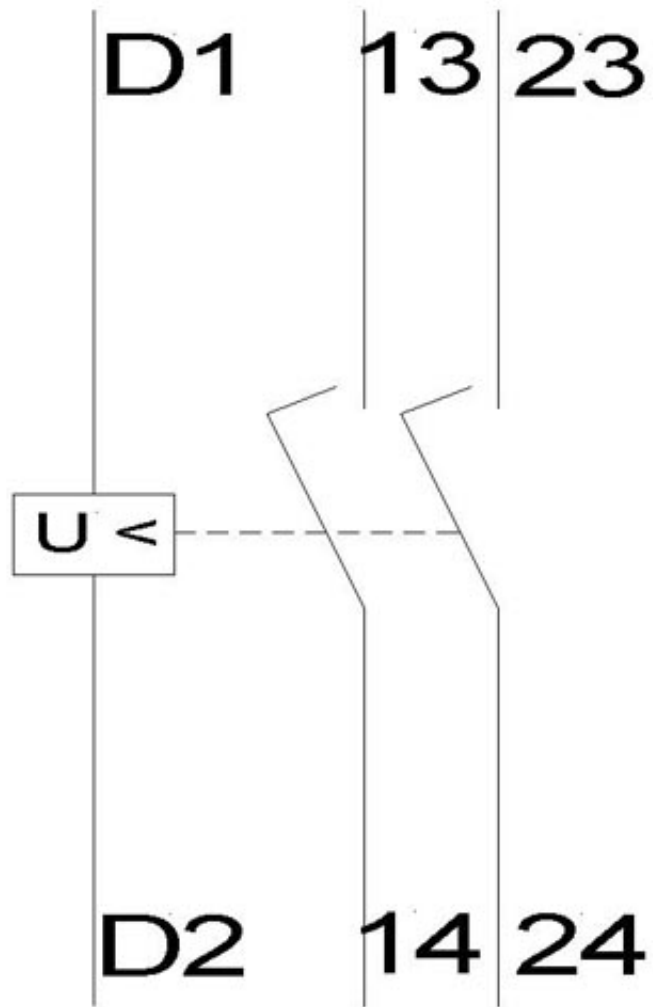

last change:

Jul 21, 2014