



UNDER-VOLTAGE RELEASE F.MOUNT.,
F. LS-SWITCH T=70MM DC 24V,
WITH 2TERMINALS

Similar to image

Technical data:

Number of NC contacts		0
Number of change-over switches		0
Number of NO contacts		0
Design of the electrical connection		screw-type terminals
Switching function / slow-operating/instantaneous contact		No
Type of voltage / for operating		DC
Control supply voltage		
• for DC / rated value		
• minimum	V	24
• maximum	V	24
Suitability for use		
• circuit breaker		No
• load switch		No
Suitability for integration		
• motor protection switch		No
• overload relay		No

Certificates/approvals:

General Product Approval	Declaration of Conformity	other
--------------------------	---------------------------	-------



[other](#)

[Environmental Confirmations](#)

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)



<http://support.automation.siemens.com/WW/view/en/5ST3045/all>


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3045

CAX-Online-Generator

<http://www.siemens.com/cax>

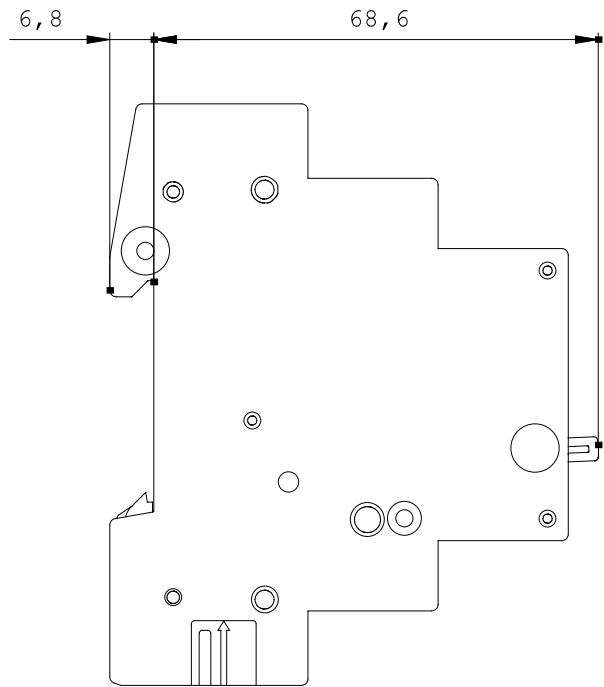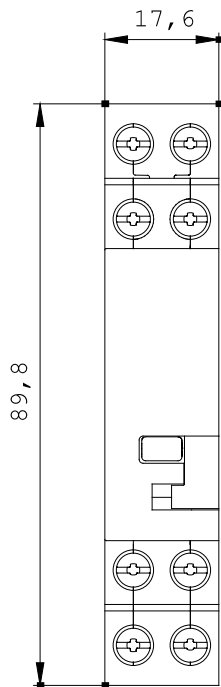

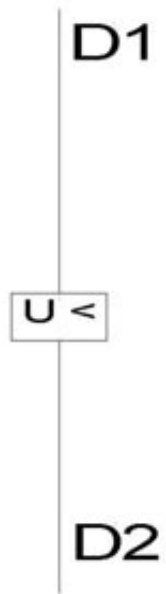

last change:

Feb 18, 2013