


PIN BUSBAR,  
10 SQMM CONNECTION: 6 X 1 PHASE SAFE-TO-TOUCH

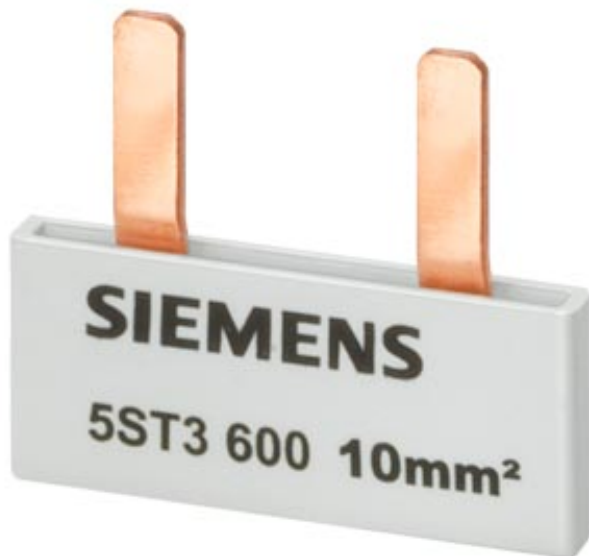

Similar to image

**Technical data:**

|  |    |            |
|--|----|------------|
| <b>Busbar design</b>                   |    | laminated  |
| <b>Length</b>                          | mm | 105        |
| <b>Width</b>                           | mm | 3.4        |
| <b>Operating current / rated value</b> | A  | 63         |
| <b>Thickness / of busbar</b>           | mm | 14         |
| <b>Material / of the busbar</b>        |    | SF-Cu F 24 |
| <b>Product property / flexible</b>     |    | No         |
| <b>Traitement de surface / étamé</b>   |    | No         |

**Certificates/approvals:**

**General Product Approval** other

[other](#)



**Further information:**

**Information- and Downloadcenter (Catalogs, Brochures,...)**  
<http://www.siemens.com/lowvoltage/catalogs>

---

Industry Mall (Online ordering system)

<http://www.siemens.com/lowvoltage/mall>

---

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5ST3601/all>

---


Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=5ST3601](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5ST3601)

---

CAX-Online-Generator

<http://www.siemens.com/cax>

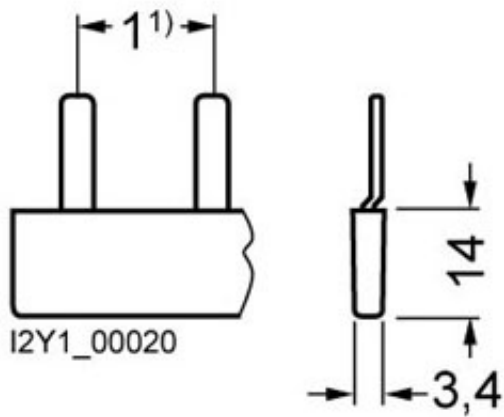

1) Pin spacings in MW (Modular widths, 1 MW = 18 mm).

last change:

Nov 29, 2012