

RIM 4 6/24VUC GN

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Product image

Similar to illustration

General ordering data

| | |
|------------|--|
| Version | RIDERSERIES RCL, LED module, Protective varistor, Rated control voltage: 6...24 V UC, Plug-in connection |
| Order No. | 8713780000 |
| Type | RIM 4 6/24VUC GN |
| GTIN (EAN) | 4032248390151 |
| Qty. | 10 pc(s). |

Creation date March 29, 2021 11:13:49 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

RIM 4 6/24VUC GN**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data**Dimensions and weights**

| | | | |
|----------------|------------|-----------------|------------|
| Depth | 34.5 mm | Depth (inches) | 1.358 inch |
| Height | 9 mm | Height (inches) | 0.354 inch |
| Net weight | 3.3 g | Width | 12.5 mm |
| Width (inches) | 0.492 inch | | |

Temperatures

| | | | |
|---------------------|--|-----------------------|----------------|
| Storage temperature | -40 °C...70 °C | Operating temperature | -40 °C...70 °C |
| Humidity | 40 °C / 93 % rel. humidity, no condensation | | |

Environmental Product Compliance

| | |
|------------|----------------|
| REACH SVHC | Lead 7439-92-1 |
|------------|----------------|

Rated data UL

| | |
|-------------------------|---------|
| Certificate No. (cURus) | E223759 |
|-------------------------|---------|

Control side

| | | | |
|--------------------|-----------|-----------------------|-------------|
| Protective circuit | Varistor | Rated control voltage | 6...24 V UC |
| Status indicator | Green LED | | |

General data

| | |
|--------|-------|
| Colour | black |
|--------|-------|

Further details of approvals / standards

| | | | |
|-----------|-------|-------------------------|---------|
| Standards | UL508 | Certificate No. (cURus) | E223759 |
|-----------|-------|-------------------------|---------|

Connection data

| | |
|------------------------|--------------------|
| Wire connection method | Plug-in connection |
|------------------------|--------------------|

Classifications

| | | | |
|-------------|-------------|-------------|-------------|
| ETIM 6.0 | EC002586 | ETIM 7.0 | EC002586 |
| ECLASS 9.1 | 27-37-10-10 | ECLASS 10.0 | 27-37-10-10 |
| ECLASS 11.0 | 27-37-16-92 | | |

Approvals

Approvals



| | |
|-----------------------|---------|
| ROHS | Conform |
| UL File Number Search | E223759 |

Data sheet

RIM 4 6/24VUC GN

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

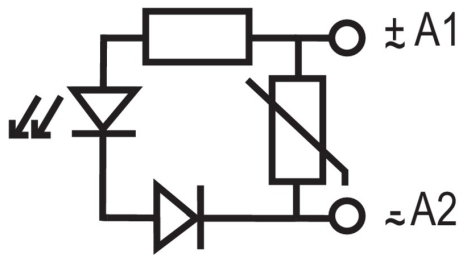
Downloads

| | |
|------------------|------------------------------|
| Engineering Data | STEP |
| Engineering Data | EPLAN, WSCAD |

RIM 4 6/24VUC GN

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Drawings**Wiring diagram****Dimensional drawing**