SIEMENS

Product data sheet 5SY5404-7

Similar to image

CIRCUIT BREAKER CURR.SENS.DC 880V AC 400V 10KA, 4POLE, C, 4A MAX. DC 1000V

Technical data:		
Type of mounting		Quick assembly system
type of voltage		AC/DC
Height	mm	90
Width	mm	72
Depth	mm	76
mounting position		any
Mounting depth	mm	70
Current / for AC / rated value	A	4
Tripping characteristic class		C
Supply voltage		
• for AC / rated value	V	400
• with multi-phase operation / with AC / rated value	V	400
Switching capacity current		
• with DC / in accordance with IEC 60947-2 / rated value	kA	15
• acc. to EN 60898 / rated value	kA	10
Breaking capacity short-circuit current (Icn)		
• with DC / in accordance with EN 60898-2	kA	10

subject to modifications
© Copyright Siemens AG 2013

Active power loss / at rated value current / with AC / in warm operating state / per pole	W	1.6
Number of pitch units for width		4
Product feature / sealable		Yes
Degree of pollution		2
Ambient temperature	°C	-25 … +55
Ambient temperature		
• during storage	°C	-40 … +75
Position / of power supply cord		Any
Product property / properties for main switches in accordance with EN 60204-1		Yes
Mechanical operating cycles as operating time / typical		20,000
Overvoltage class		3
Product equipment / touch-protection		Yes
Resistance against shock / according to IEC 60068-2-27		150m/s² at 11ms half-sine
Insulation voltage		
• with multi-phase operation / with AC / rated value	V	440
• for DC / rated value	V	250
AWG number		
• as encoded connectable conductor cross-section		14 … 4
Section de conducteur raccordable		
• solid	mm²	0.75 … 35
• multibrin	mm²	0.75 … 35
• finely stranded		
• with wire end processing	mm²	0.75 … 25
Product component		
• combined terminal top		Yes
• combined terminal bottom		Yes
Tightening torque		
• with screw-type terminals	N·m	2.5 … 3
Tightening torque (lbf·in)		
• with screw connection	lbf·in	22 … 26
Product feature		
• [not supplied - silicon-free]		Yes
• halogen-free		Yes
Number of test cycles / for environmental testing / in accordance with IEC 60068-2-30		6
Item designation / according to DIN EN 61346-2		F

Certificates/approvals:

© Copyright Siemens AG 2013

General Product Approval	Declaration of Conformity	other
GOST	EG-Konf.	other

Further information:

Information- and Downloadcenter (Catalogs, Brochures,…)
http://www.siemens.com/lowvoltage/catalogs

Industry Mall (Online ordering system)
http://www.siemens.com/lowvoltage/mall

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)
http://support.automation.siemens.com/WW/view/en/5SY5404-7/all

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5SY5404-7

CAx-Online-Generator
http://www.siemens.com/cax

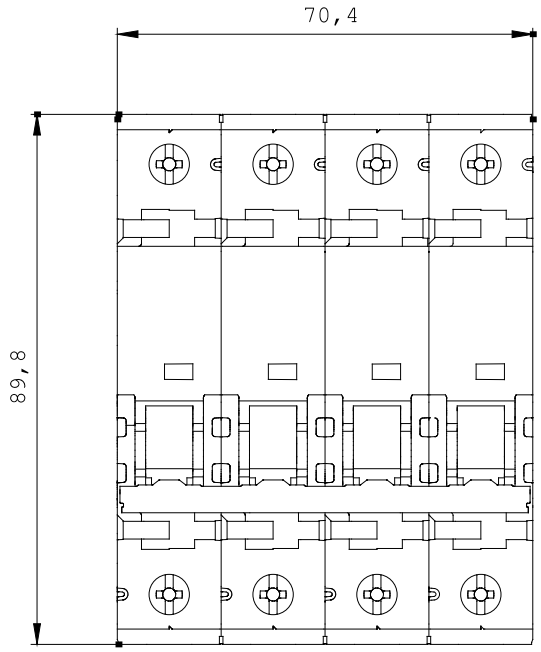

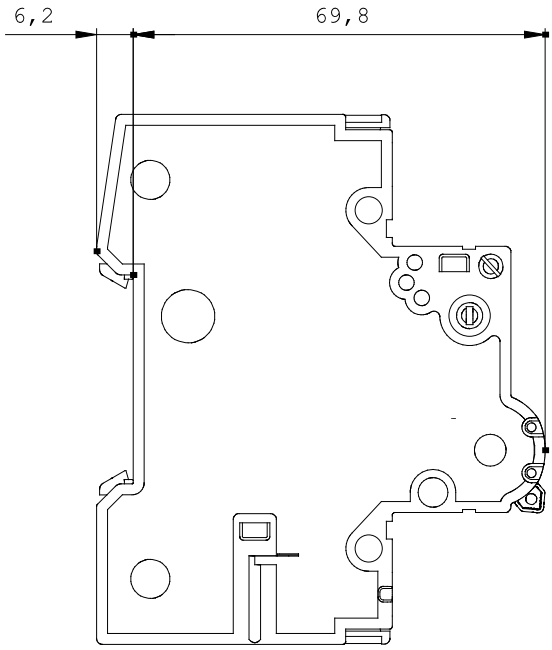

last change: Dec 31, 2012

© Copyright Siemens AG 2013