

**VSPC BASE 2/4CH R****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Base element for the pluggable VSPC arrester, integrated PE foot in impedance-neutral VSPC BASE. Can safely discharge up to 20 kA (8/20  $\mu$ s) and 2.5 kA (10/350  $\mu$ s) to the PE.

**General ordering data**

Version	Surge protection, Flange-mounted housing, 10 A, IEC 61643-21, IEC 62305, DIN EN 60079-0:2009, DIN EN 60079-11:2007, DIN EN 60079-26:2007, DIN EN 61241-11:2006
Order No.	<a href="#">8951790000</a>
Type	VSPC BASE 2/4CH R
GTIN (EAN)	4032248743032
Qty.	1 pc(s).

Creation date March 29, 2021 11:59:44 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## VSPC BASE 2/4CH R

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Depth	69 mm	Depth (inches)	2.717 inch
Height	98 mm	Height (inches)	3.858 inch
Net weight	74 g	Width	17.8 mm
Width (inches)	0.701 inch		

### Temperatures

Storage temperature	-40 °C...80 °C	Operating temperature	-40 °C...70 °C
Humidity	5...96 %		

### Environmental Product Compliance

REACH SVHC	Lead 7439-92-1
------------	----------------

### Rated data UL

Certificate No. (UL)	E311081	UL certificate	UL 497b Certificate
----------------------	---------	----------------	---------------------

### Connection data, remote alert

Connection type	Screw connection	Cross-section for connected wire, solid core, max.	1.5 mm <sup>2</sup>
Cross-section for connected wire, solid core, min.	0.5 mm <sup>2</sup>	Max. torque	0.2 Nm
Stripping length	6 mm		

### CSA protection data

Gas group C	IIB	Gas group D	IIA
Gas groups A, B	IIC	Input current, max. I <sub>i</sub>	300 mA
Internal inductance, max. L <sub>i</sub>	0 μH		

### General data

Colour	black	Design	Terminal, miscellaneous
Optical function display	No	Protection degree	IP20
Rail	TS 35, TS 35 x 7.5	Segment	Measurement - Monitoring - Setting
UL 94 flammability rating	V-0	Version	Flange-mounted housing

### Insulation coordination acc. to EN 50178

Pollution severity	2	Surge voltage category	III
--------------------	---	------------------------	-----

### Rated data IEC / EN

Rated current I <sub>N</sub>	10 A	Signalling contact	U <sub>N</sub> 250 V AC 0.1 A 1CO at VSPC R with VSPC control unit
Standards	IEC 61643-21, IEC 62305, DIN EN 60079-0:2009, DIN EN 60079-11:2007, DIN EN 60079-26:2007, DIN EN 61241-11:2006	Voltage type	AC/DC

Creation date March 29, 2021 11:59:44 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## VSPC BASE 2/4CH R

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Further details of approvals

GOST certificate                      GOST-Zertifikat

### Connection data

Type of connection	Screw connection	Stripping length, rated connection	7 mm
Tightening torque, min.	0.5 Nm	Tightening torque, max.	0.8 Nm
Clamping range, min.	0.5 mm <sup>2</sup>	Clamping range, max.	4 mm <sup>2</sup>
Wire cross-section, solid, min.	0.5 mm <sup>2</sup>	Wire cross-section, solid, max.	4 mm <sup>2</sup>
Wire connection cross section, finely stranded, max.	2.5 mm <sup>2</sup>	Conductor cross-section, flexible, AEH (DIN 46228-1), min.	0.5 mm <sup>2</sup>
Conductor cross-section, flexible, AEH (DIN 46228-1), max.	2.5 mm <sup>2</sup>	Connection cross-section, stranded, min.	0.5 mm <sup>2</sup>
Connection cross-section, stranded, max.	2.5 mm <sup>2</sup>	Blade size	0.6 x 3.5 mm

### Ratings IECEx/ATEX/cUL

cUL certificate                      cUL Certificate

### Classifications

ETIM 6.0	EC000472	ETIM 7.0	EC000472
ECLASS 9.0	27-13-08-03	ECLASS 9.1	27-13-08-07
ECLASS 10.0	27-13-08-03	ECLASS 11.0	27-13-08-03

### Tender specification sheets

Long specification	<p>Base element with remote monitoring option to receive a protected plug with status display for four floating-ground powered cables. When the base unit is fitted, a simultaneous electrically conducting contact is made between the mounting rail (earth) and the reference potential (ground) of the protection circuit in the plug.</p> <p>Mechanical coding of the base element to the protected plug according to switching type and rated voltage. The base unit is coded itself by the first insertion of a protected plug. Mechanical coding of the base element to the protected plug according to switching type and rated voltage. The base unit is coded itself by the first insertion of a protected plug. Optical identification of the protected plug based on the type of protected switching and the voltage level. Possible to mark all terminals</p>	Short specification	<p>Base element with remote monitoring option to receive a protected plug with status display for up to four floating-ground powered cables, direct contact of the plug protection circuit to the earth potential. With optional remote monitoring.</p>
--------------------	--	---------------------	---

Creation date March 29, 2021 11:59:44 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**VSPC BASE 2/4CH R**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

www.weidmueller.com

**Technical data****Approvals**

Approvals



ROHS	Conform
UL File Number Search	E311081

**Downloads**

Approval/Certificate/Document of Conformity	<a href="#">CE PAPER</a> <a href="#">Declaration of Conformity</a>
Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD</a>
User Documentation	<a href="#">Instruction sheet</a>


**VSPC BASE 2/4CH R**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

www.weidmueller.com

**Drawings**

**Electric symbol**

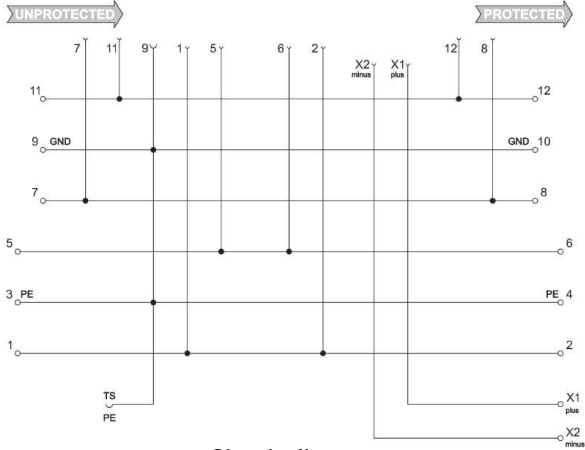

Circuit diagram

Cate- gory	Testing pulse	Surge voltage	Surge current	Pulse	Type
C1	Quick-rising edge	0.5 - 2 kV with 1.2/50 µs	0.25 - 1 kA mit 8/20 µs	300	Surge voltage arrester
C2	Quick-rising edge	2 - 10 kV with 1.2/50 µs	1 - 5 kA mit 8/20 µs	10	Surge voltage arrester
C3	Quick-rising edge	≥ 1 kV with 1 kV/µs	10 - 100 A mit 10/10000 µs	300	Surge voltage arrester
D1	High power	≥ 1 kV	0.5 - 2.5 kA mit 10/350 µs	2	Arrester for lightning current and surge voltages

Discharge capacity