

SOFTSTART, N-TYPE AC 400V 1600W 1PH



Model		
product brand name		SETRON
Dissipation		
Power loss [W]		
• for rated value of the current / at AC / in hot operating state / per pole	W	0.7
• maximum	W	18
Main circuit		
Operating voltage / rated value		
• minimum	V	400
• maximum	V	400
Control current		
Control supply voltage		
• at AC / at 50 Hz / rated value / minimum	V	400
• at AC / at 50 Hz / rated value / maximum	V	400
• at AC / at 60 Hz / rated value / minimum	V	400
• at AC / at 60 Hz / rated value / maximum	V	400

Product function

Product function / motor overload protection		No
Height	mm	90
Depth	mm	64
Net weight	g	160

Environmental conditions

Ambient temperature		
• without derating / rated value	°C	60

General Product Approval

other

[Umweltbestätigung](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TT3441>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT3441/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)


http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=5TT3441

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

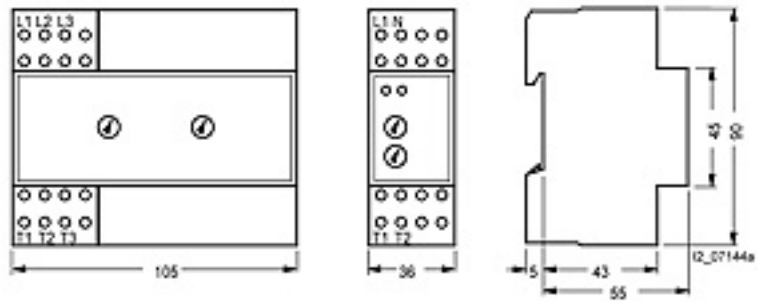

last modified:

08/11/2016