

INSTA CONTACTOR 0/1 AUTOMATIC WITH 4 NO CONTACTS CONTACT FOR AC 230, 400V 25A ACTIVATION ACDC24V



Model		
product brand name		SETRON
Product designation		Insta contactors
Type of voltage / of the operating voltage		AC
Type of voltage / for actuation		AC/DC
Protection class		
Protection class IP		IP20
Dissipation		
Power loss [W]		
<ul style="list-style-type: none"> for rated value of the current / at AC / in hot operating state / per pole 	W	2.2
<ul style="list-style-type: none"> maximum 	W	11.4
Main circuit		
Operating voltage / rated value		
<ul style="list-style-type: none"> minimum 	V	400
<ul style="list-style-type: none"> maximum 	V	400
Operating current / rated value	A	25

Control current

Control supply voltage

• rated value	V	24
• rated value / maximum	V	24
• at DC / rated value	V	24

Product details

Product component / Slide for manual operation		Yes
Product extension / can be installed / supplementary devices		Yes

Number

Number of NC contacts		0
Number of NO contacts		4

Mechanical Design

Height	mm	90
Width	mm	35
Depth	mm	71
Installation depth	mm	64
Number of width units		2
Net weight	g	150

Certificates

Equipment marking / acc. to DIN EN 61346-2		Q
--	--	---

General Product Approval

Declaration of Conformity



[sonstig](#)



Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/5TT5030-8>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/5TT5030-8/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mfb=5TT5030-8

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

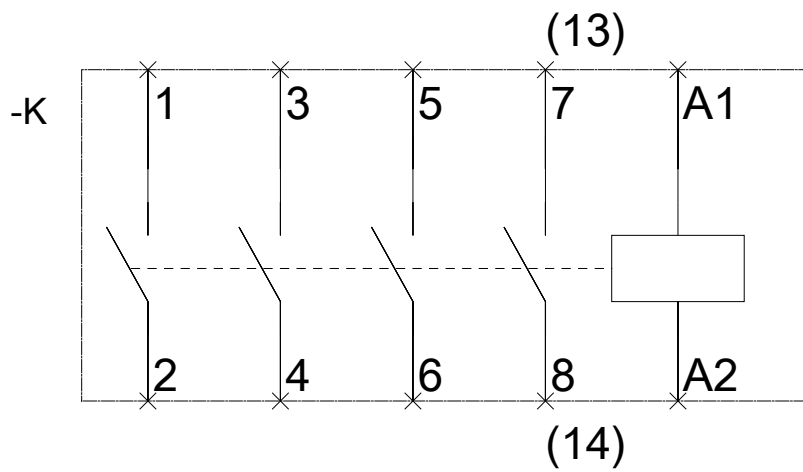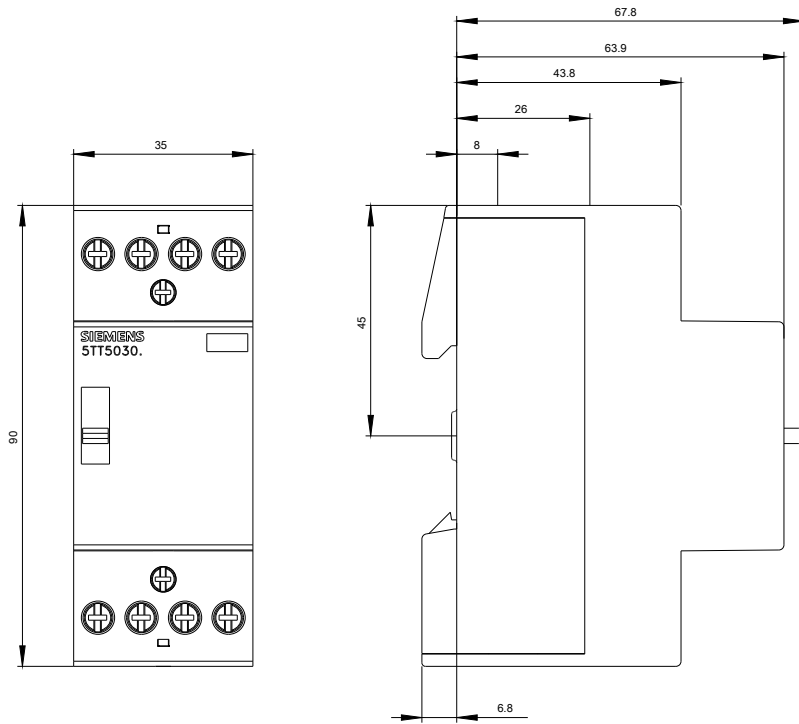

last modified:

08/11/2016