


RECHARGEABLE BUFFER BATTERY FOR MOBILE  
 PANEL DP,  
 CONNECTED WITH CABLES, MOBILE PANEL PN,  
 CONNECTED WITH CABLES,  
 MOBILE PANEL 277 IWLAN,  
 MOBILE PANEL 277F IWLAN

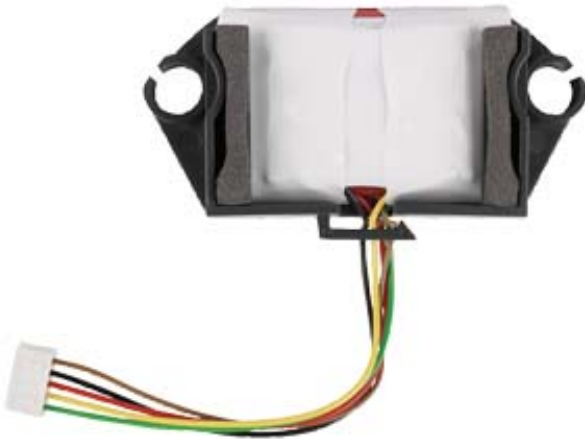

Installation type/mounting	
Wall mounting/direct mounting possible	Yes ; in HMI devices, battery compartment
Supply voltage	
Type of supply voltage	DC
Rated value (DC)	3.6 V ; 1.15 Ah
Battery	
Design	
Special design	Yes ; flat
Technology	
Lithium-ion	Yes ; 1/CP7/34/50 01 CGA
Standards, approvals, certificates	
CE mark	Yes
Ambient conditions	
Operating temperature	
Operating temperature range, min.	0 °C ; Don't charge below
Operating temperature range, max.	55 °C
Storage/transport temperature	
min.	-20 °C

<b>max.</b>	70 °C
<b>Relative humidity</b>	
<b>Operation, max.</b>	90 %
<b>Dimensions</b>	
<b>Width</b>	35 mm
<b>Height</b>	50 mm
<b>Thickness</b>	10 mm
<b>Weights</b>	
<b>Weight without packaging</b>	38 g
<b>Scope of supply</b>	
<b>Delivery unit in items</b>	1 ; incl. 65 mm connecting cable
<b>Other</b>	
<b>Note:</b>	for Mobile Panel DP cabled, Mobile Panel PN cabled, Mobile Panel 277 IWLAN, Mobile Panel 277F IWLAN
<b>Usable in the following products</b>	
<b>Product 1</b>	<a href="#">6AV6645-0AA01-0AX0</a>
<b>Product 2</b>	<a href="#">6AV6645-0AB01-0AX0</a>
<b>Product 3</b>	<a href="#">6AV6645-0AC01-0AX0</a>
<b>Product 4</b>	<a href="#">6AV6645-0BA01-0AX0</a>
<b>Product 5</b>	<a href="#">6AV6645-0BB01-0AX0</a>
<b>Product 6</b>	<a href="#">6AV6645-0BC01-0AX0</a>
<b>Product 7</b>	<a href="#">6AV6645-0DD01-0AX0</a>
<b>Product 8</b>	<a href="#">6AV6645-0DE01-0AX0</a>
<b>Product 9</b>	<a href="#">6AV6645-0DB01-0AX0</a>
Status	Jul 21, 2014