

SAIL-7/8BG-5-10U


Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com



Sensor/actuator cables are used for wiring sensors and actuators and for transmitting data or power in various applications. The moulded cable offers connected and tested connection of the plug-in connector to the cable ex-works. The cables may be exposed to a wide range of conditions, such as humidity, dust, heat, cold, shock or vibration.

The 7/8" cables tend to be used for power supply applications.

Is there something you have not managed to find or you feel needs explanation? Talk to us!

General ordering data

Version	Sensor/actuator line, One end without connector, 7/8", Number of poles : 5 (4 + PE), 10 m, Female socket, straight, Shielded: No, LED: No, Sheath material: PUR, Halogen: No
Order No.	1292191000
Type	SAIL-7/8BG-5-10U
GTIN (EAN)	4050118088274
Qty.	1 pc(s).

Creation date March 23, 2021 2:48:53 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

SAIL-7/8BG-5-10U

Weidmüller Interface GmbH & Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

Technical data

Dimensions and weights

Net weight 1,300 g

Environmental Product Compliance

REACH SVHC Lead 7439-92-1

Technical specifications for cable

Bending radius, min., moving	7.5 x cable diameter		
Cable length	10 m		
Colour coding	brown, white, blue, black, Green/yellow		
Configurable cable length	No		
Core cross-section	1.5 mm ²		
Halogen	No		
Housing main material	PUR		
Insulation	TPM		
Number of poles	5		
Number of poles	5 (4 + PE)		
Outer cladding in accordance with UL AWM style	20234 (80 °C / 1000 V)		
Outer diameter	8.7 mm		
Outside diameter	Diameter	8.7 mm	
	Signs	±	
	Tolerance	0.2 mm	
Outside diameter	8.7 mm ± 0.2 mm		
PE function	Yes		
Resistant to welding beads	No		
Sheath material	PUR		
Sheathing colour	black		
Shielded	No		
Suitable for cable carriers	No		
Temperature range, moving	-20...80 °C		
Temperature range, moving, max.	80 °C		
Temperature range, moving, min.	-20 °C		
Temperature range, stationary	-50...80 °C		
Temperature range, stationary, max.	80 °C		
Temperature range, stationary, min.	-50 °C		
Torsion resistance	0 °/m		

General technical data

Coding	none	Connection thread	7/8"
Contact surface	Au (Gold)	Housing main material	PUR
Insulation strength	10 ⁸ Ω	LED	No
Plugging cycles	≥ 100	Pollution severity	3
Protection degree	IP68, when screwed in	Rated current	9 A
Rated voltage	300 V	Temperature range of housing	-25...+80 °C
Threaded ring material jumpered	Diecast zinc No	Version	Female socket, straight

SAIL-7/8BG-5-10U

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 26
D-32758 Detmold
Germany

www.weidmueller.com

Technical data

Classifications

ETIM 6.0	EC001855	ETIM 7.0	EC001855
ECLASS 9.0	27-06-03-11	ECLASS 9.1	27-06-03-11
ECLASS 10.0	27-06-03-11	ECLASS 11.0	27-06-03-11

Approvals

Approvals



ROHS	Conform
UL File Number Search	E307231

Downloads

Engineering Data	EPLAN, WSCAD
------------------	------------------------------


SAIL-7/8BG-5-10U

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 26
 D-32758 Detmold
 Germany

www.weidmueller.com


Drawings

Dimensioned drawing

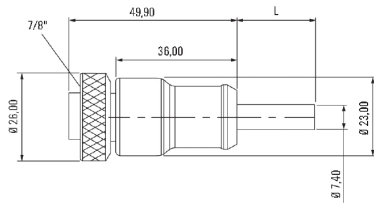


Straight socket

Pole scheme



Socket

Wiring diagram



The ideal tool: Screwty[®] with torque function



Light, securely screwed-in round plug-in connectors. Screwty set DM / VPE: 1 / Order No.: 1920000000 Adapters: M12, M12 F, M8, M8 F