


**MCZ 5 SET****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

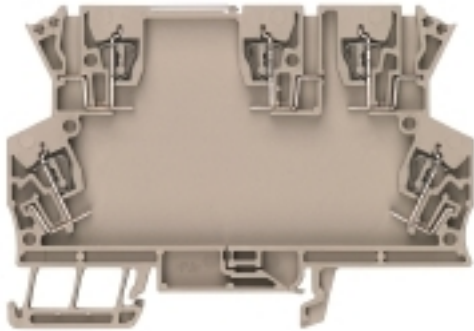

Open miniature housing in modular terminal format with five tension clamp connections. A transparent hinged top plate can be used for labelling and provides access to potentiometer and status displays. Plug-in cross-connectors can be used to interconnect the three top connections. A cover plate for closing off the housing is also available.

**General ordering data**

Version	Small housing, OMNIMATE Housing - TERMINALBOX grey-beige, Flange-mounted housing, Width: 6 mm
Order No.	<a href="#">8397760000</a>
Type	MCZ 5 SET
GTIN (EAN)	4008190398545
Qty.	1 pc(s).

Creation date March 29, 2021 10:49:14 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## MCZ 5 SET

**Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

### Dimensions and weights

Height	63 mm	Height (inches)	2.48 inch
Length	91 mm	Length (inches)	3.583 inch
Net weight	1,662 g	Width	6 mm
Width (inches)	0.236 inch		

### Rated data acc. to IEC

Rated current, max. number of poles (Tu=20°C)	10 A	Rated current, max. number of poles (Tu=40°C)	10 A
Rated voltage for surge voltage class / pollution degree II/2	400 V	Rated voltage for surge voltage class / pollution degree III/2	320 V
Rated voltage for surge voltage class / pollution degree III/3	250 V	Rated impulse voltage for surge voltage class/ pollution degree II/2	4 kV
Rated impulse voltage for surge voltage class/ pollution degree III/2	4 kV	Rated impulse voltage for surge voltage class/ contamination degree III/3	4 kV

### Design - IN requirements

PCB thickness	1 mm	Tolerance for the PCB shape	±0.1 mm
---------------	------	-----------------------------	---------

### Assembly properties

Number of connection levels	2	Number of PCB boards, max.	1
Continuous current of cross-connection	10 A	Continuous current of cross-connection/ PCB	32 A
Cross-connection	Yes	Type of contact to PCB	Solder connection, direct
Type of connection	Tension-clamp connection		

### Housing properties

Flip cover mountable	Yes	Marker integrateable	Yes
----------------------	-----	----------------------	-----

### Connectable conducteurs

Stripping length	8 mm	Blade size	0.6 x 3.5 mm
Clamping range, min.	0.13 mm <sup>2</sup>	Clamping range, max.	2.5 mm <sup>2</sup>
Wire connection cross section AWG, min.	AWG 26	Wire connection cross section AWG, max.	AWG 14
Solid, min. H05(07) V-U	0.5 mm <sup>2</sup>	Solid, max. H05(07) V-U	2.5 mm <sup>2</sup>
Flexible, min. H05(07) V-K	0.5 mm <sup>2</sup>	w. plastic collar ferrule, DIN 46228 pt 4, min.	0.5 mm <sup>2</sup>
w. plastic collar ferrule, DIN 46228 pt 4, max.	1.5 mm <sup>2</sup>	w. wire end ferrule, DIN 46228 pt 1, min.	0.5 mm <sup>2</sup>
w. wire end ferrule, DIN 46228 pt 1, max.	1.5 mm <sup>2</sup>	Max. clamping range	2.5 mm <sup>2</sup>

### General data

Colour	grey-beige	Encapsulation option	Yes
Protection degree	IP20	Rail	TS 32, TS 35

### Material data

Comparative Tracking Index (CTI)	≥ 600	Insulating material group	I
UL 94 flammability rating	V-0		

Creation date March 29, 2021 10:49:14 PM CEST

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

2

**MCZ 5 SET**

**Weidmüller Interface GmbH & Co. KG**  
 Klingenbergstraße 26  
 D-32758 Detmold  
 Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Technical data**

**Classifications**

ETIM 6.0	EC001031	ETIM 7.0	EC001031
ECLASS 9.0	27-18-27-02	ECLASS 9.1	27-18-27-92
ECLASS 10.0	27-18-27-02	ECLASS 11.0	27-18-27-02

**Approvals**

Approvals



ROHS Conform

**Downloads**

Engineering Data [PCB contour with soldering pads](#)