



COMMUNIKATIONSPROCESSOR CP343-1 FOR CONNECTING SIMATIC S7-300 TO IND. ETHERNET VIA ISO AND TCP/IP, PROFINET IO-CONTROLLER OR PROFINET IO-DEVICE, INTEGR. 2-PORT SWITCH ERTEC200 S7-COMM., FETCH/WRITE, SEND/RCV W. AND W/O RFC1006, MULTICAST DHCP, NTC-CPU SYNC, DIAGNOSTIC, INITIALIZATION VIA LAN, 2 X RJ45 CONNECT. FOR LAN WITH 10/100 MBIT/S

### Transmission rate

Transfer rate / at the interface 1	10 ... 100 Mbit/s
------------------------------------	-------------------

### Interfaces

Number of electrical connections	
<ul style="list-style-type: none"> <li>• at interface 1 / in accordance with Industrial Ethernet</li> </ul>	2
<ul style="list-style-type: none"> <li>• for power supply</li> </ul>	1

### Supply voltage, current consumption, power loss

Type of voltage / of supply voltage	DC
Supply voltage	
<ul style="list-style-type: none"> <li>• 1 / from backplane bus</li> </ul>	5 V
<ul style="list-style-type: none"> <li>• external</li> </ul>	24 V
Relative positive tolerance / at 24 V / with DC	20 %
Relative negative tolerance / at 24 V / with DC	15 %
Consumed current	
<ul style="list-style-type: none"> <li>• from backplane bus / at 5 V / for DC / Typical</li> </ul>	0.2 A
<ul style="list-style-type: none"> <li>• from external supply voltage / at 24 V / with DC</li> </ul>	
<ul style="list-style-type: none"> <li>• typical</li> </ul>	0.16 A
<ul style="list-style-type: none"> <li>• maximum</li> </ul>	0.2 A
Resistive loss	5.8 W

### Permitted ambient conditions

Ambient temperature	
---------------------	--

• during storage	-40 ... +70 °C
• during transport	-40 ... +70 °C
Relative humidity	
• at 25 °C / without condensation / during operating / maximum	95 %
Protection class IP	IP20

### Design, dimensions and weight

Width	40 mm
Height	125 mm
Depth	120 mm
Net weight	0.22 kg

### Performance data / open communication

Number of possible connections / for open communication / by means of SEND/RECEIVE blocks / maximum 16

#### Data volume

- as user data per ISO connection / for open communication / by means of SEND/RECEIVE blocks / maximum 8 Kibyte
- as user data per ISO on TCP connection / for open communication / by means of SEND/RECEIVE blocks / maximum 8 Kibyte
- as user data per TCP connection / for open communication / by means of SEND/RECEIVE blocks / maximum 8 Kibyte
- as user data per UDP connection / for open IE communication / by means of SEND/RECEIVE blocks / maximum 2 Kibyte

Number of Multicast stations 16

### Performance data / S7 communication

Number of possible connections / for S7 communication

- maximum 16

### Performance data / multi-protocol mode

Number of active connections / with multiprotocol mode 32

### Performance data / PROFINET communication / as PN IO-Controller

Number of PN IO-Devices / on PROFINET IO-Controller / usable / total 32

#### Amount of data

- as useful data for input variables / as PROFINET IO controller / maximum 1 Kibyte
- as useful data for input variables / with PROFINET IO controller / maximum 1 Kibyte
- as useful data for input variables per PN IO device / with PROFINET IO controller / maximum 240 byte
- as useful data for output variables per PN IO device / with PROFINET IO controller / maximum 240 byte
- as user data for input variable per PN IO device / per submodule as PROFINET IO controller / maximum 240 byte

<ul style="list-style-type: none"> <li>• as user data for output variables per PN IO device / per submodule as PROFINET IO controller / maximum</li> </ul>	240 byte
<b>Performance data / PROFINET communication / as PN IO-Device</b>	
Product function / PROFINET IO device	Yes
Amount of data	
<ul style="list-style-type: none"> <li>• as useful data for input variables / as PROFINET IO device / maximum</li> </ul>	512 byte
<ul style="list-style-type: none"> <li>• as useful data for input variables / as PROFINET IO device / maximum</li> </ul>	512 byte
<ul style="list-style-type: none"> <li>• as useful data for input variables / for each sub-module under PROFINET IO device</li> </ul>	240 byte
<ul style="list-style-type: none"> <li>• as useful data for input variables / for each sub-module under PROFINET IO device</li> </ul>	240 byte
<ul style="list-style-type: none"> <li>• as useful data for the consistency area for each sub-module</li> </ul>	240 byte
Number of submodules / per PROFINET IO-Device	32
<b>Product functions / management, configuration</b>	
Product function / MIB support	Yes
Protocol / is supported	
<ul style="list-style-type: none"> <li>• SNMP v1</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• DCP</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• LLDP</li> </ul>	Yes
Identification & maintenance	
<ul style="list-style-type: none"> <li>• I&amp;M0 - device-specific information</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• I&amp;M1 - plant identification/location name</li> </ul>	Yes
<b>Product functions / Diagnosis</b>	
Product function / Web-based diagnostics	Yes
<b>Product functions / switch</b>	
Product feature / switch	Yes
Product function	
<ul style="list-style-type: none"> <li>• switch-managed</li> </ul>	No
<ul style="list-style-type: none"> <li>• Configuration with STEP 7</li> </ul>	Yes
<b>Product functions / Redundancy</b>	
Product function	
<ul style="list-style-type: none"> <li>• Ring redundancy</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• Redundancy manager</li> </ul>	No
<ul style="list-style-type: none"> <li>• MRP redundancy protocol</li> </ul>	Yes
<b>Product functions / Security</b>	
Product function	
<ul style="list-style-type: none"> <li>• ACL - IP-based</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• switchoff of non-required services</li> </ul>	Yes
<ul style="list-style-type: none"> <li>• blocking of communication via physical ports</li> </ul>	Yes

- log file for unauthorized access

No

## Product functions / Time

Product function

- SICLOCK support
- pass on time synchronization


Yes

Yes

Protocol / is supported / NTP

Yes

## Maßzeichnung

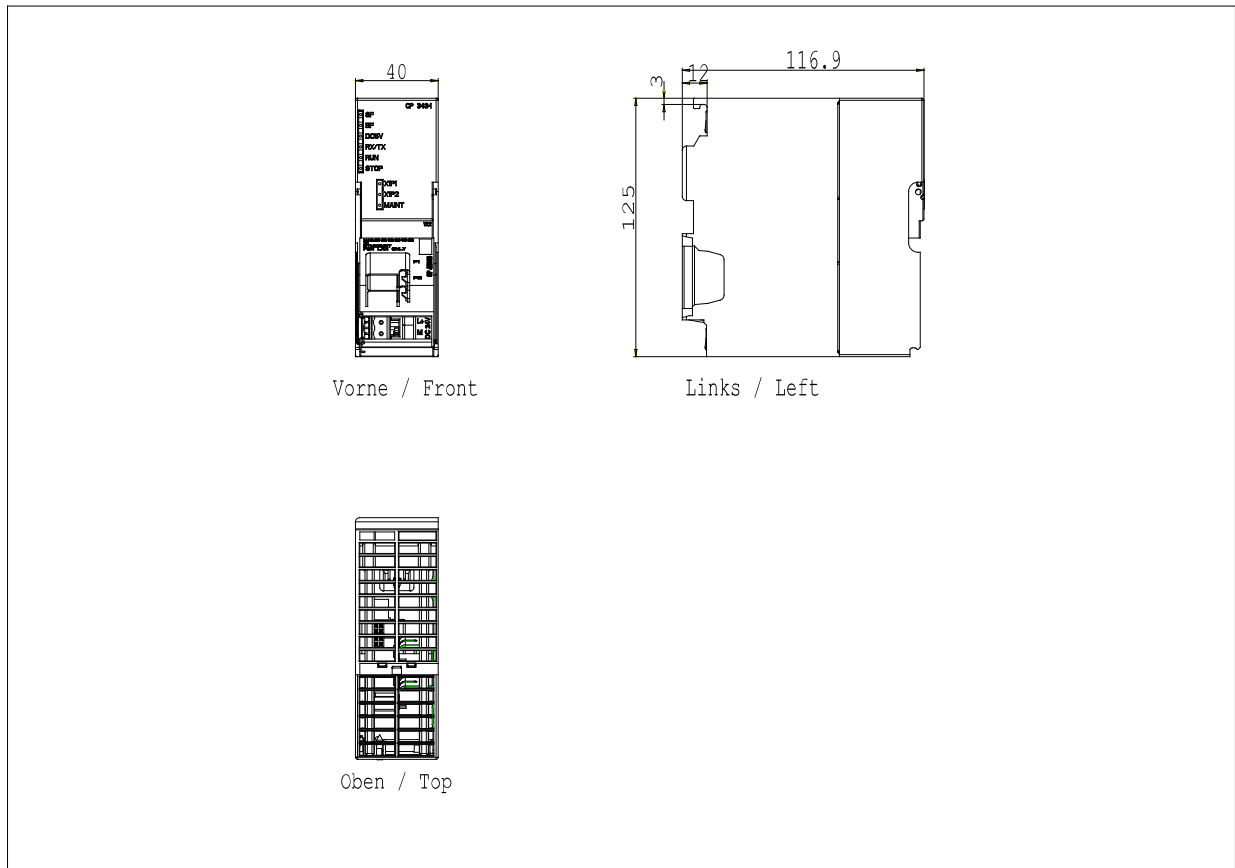

letzte Änderung:

Jul 17, 2012