



SWITCH DISCONNECTOR,
3-POLE EMERG. STOP OPERATING MECHAN. 3KL50,
63 A, SIZE 2 W. FUSE

Similar to image

Technical data:

Protection class IP		others
Height / of the housing	mm	307
Width / of the housing	mm	307
Depth / of the housing	mm	147
Installation size of fuse-link		others
Insulation voltage / rated value	V	1,000
Operating current / rated value	A	6
Product feature / of the fuse disconnecter housing		with switch disconnecter

Certificates/approvals:

General Product Approval	Declaration of Conformity	Test Certificates	
 GOST	 EG-Konf.	Special Test Certificate	Type Test Certificates/Test Report

Further information:

Information- and Downloadcenter (Catalogs, Brochures,...)
<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/8HP2741>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)


<http://support.automation.siemens.com/WW/view/en/8HP2741/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)

http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8HP2741

CAx-Online-Generator

<http://www.siemens.com/cax>

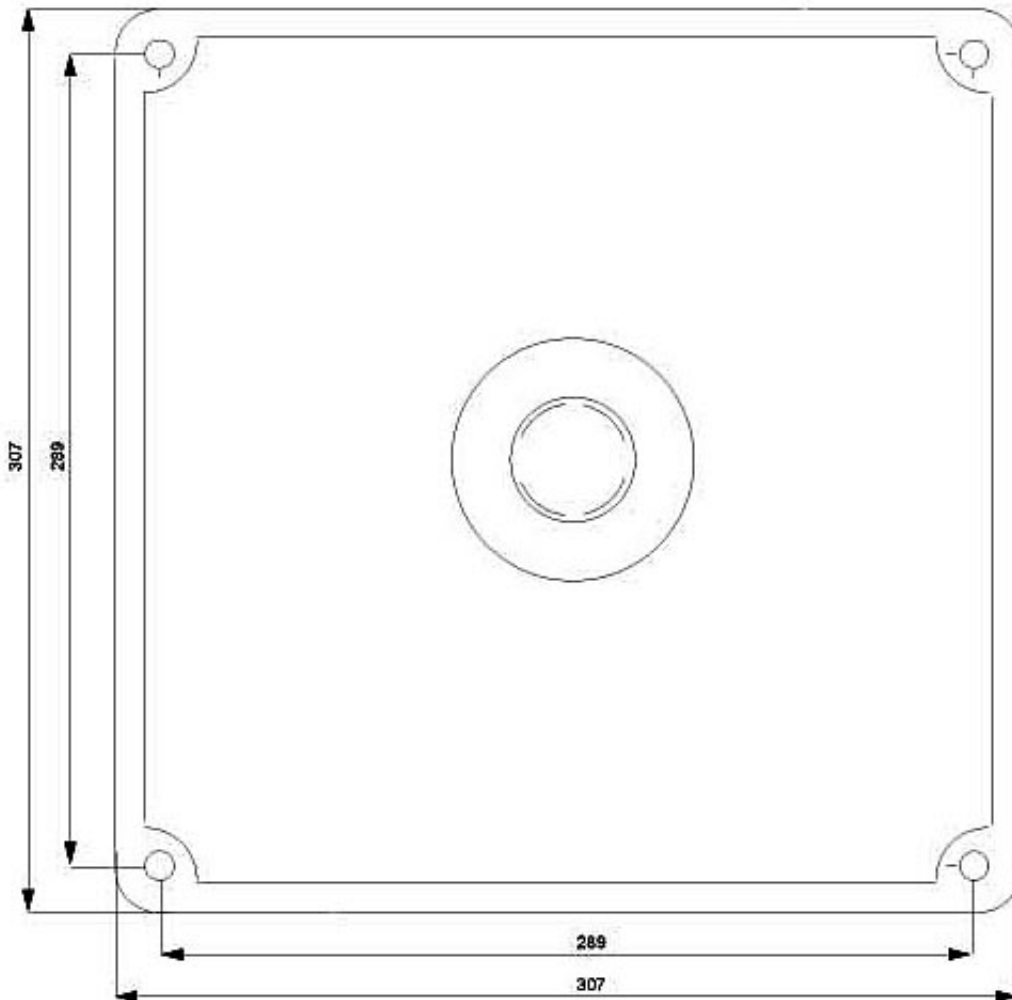

last change:

Jul 11, 2014