



BUILT-IN LUMINAIRE STEADY BURNING LIGHT,
12 - 230V UC, RED

General technical details:





| | | |
|----------------------------------------------------------------------------------------------------------------------------------------|--------|------------------|
| product designation | | continous light |
| Type of voltage • of the operating voltage | | AC/DC |
| Operating frequency • 1 / rated value | Hz | 50 |
| Operating voltage • 1 / for DC / rated value • at 50 Hz / at AC / rated value | V V | 24 24 ... 230 |
| Recorded real power | W | 5 |
| Item designation • according to DIN 40719 extendable after IEC 204-2 / according to IEC 750 • according to DIN EN 61346-2 | | H P |

Mechanical design:


| | | |
|---------------------------------------------------------|----|--------------|
| Product component / fluorescent materials | | No |
| Type of mounting | | screw fixing |
| Material / of the enclosure | | thermoplast |
| Color / of the lens | | red |
| External diameter / of the signal column element | mm | 70 |

| Lamp: | | |
|--------------------------------|--|------------------------------|
| Execution of the mounting | | BA 15d |
| Design of the light | | lights for filament lamp/LED |
| Nature of fluorescent material | | filament lamp / LED |

| Ambient conditions: | | |
|---------------------|----|-------------|
| Ambient temperature | | |
| • during operating | °C | -20 ... +60 |
| Protection class IP | | IP65 |
| Depth | mm | 75 |
| Height | mm | 96.5 |
| Width | mm | 75 |

| Certificates/approvals: | | | |
|-------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------|
| General Product Approval | EMC | Declaration of Conformity | |
|  GOST |  UL |  C-TICK |  EG-Konf. |

| Further information: |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Information- and Downloadcenter (Catalogs, Brochures,...) http://www.siemens.com/industrial-controls/catalogs |
| Industry Mall (Online ordering system) http://www.siemens.com/industrial-controls/mall |
| CAX-Online-Generator http://www.siemens.com/cax |
| Service&Support (Manuals, Certificates, Characteristics, FAQs,...) http://support.automation.siemens.com/WWW/view/en/8WD5300-1AB/all |
| Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...) http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=8WD5300-1AB |

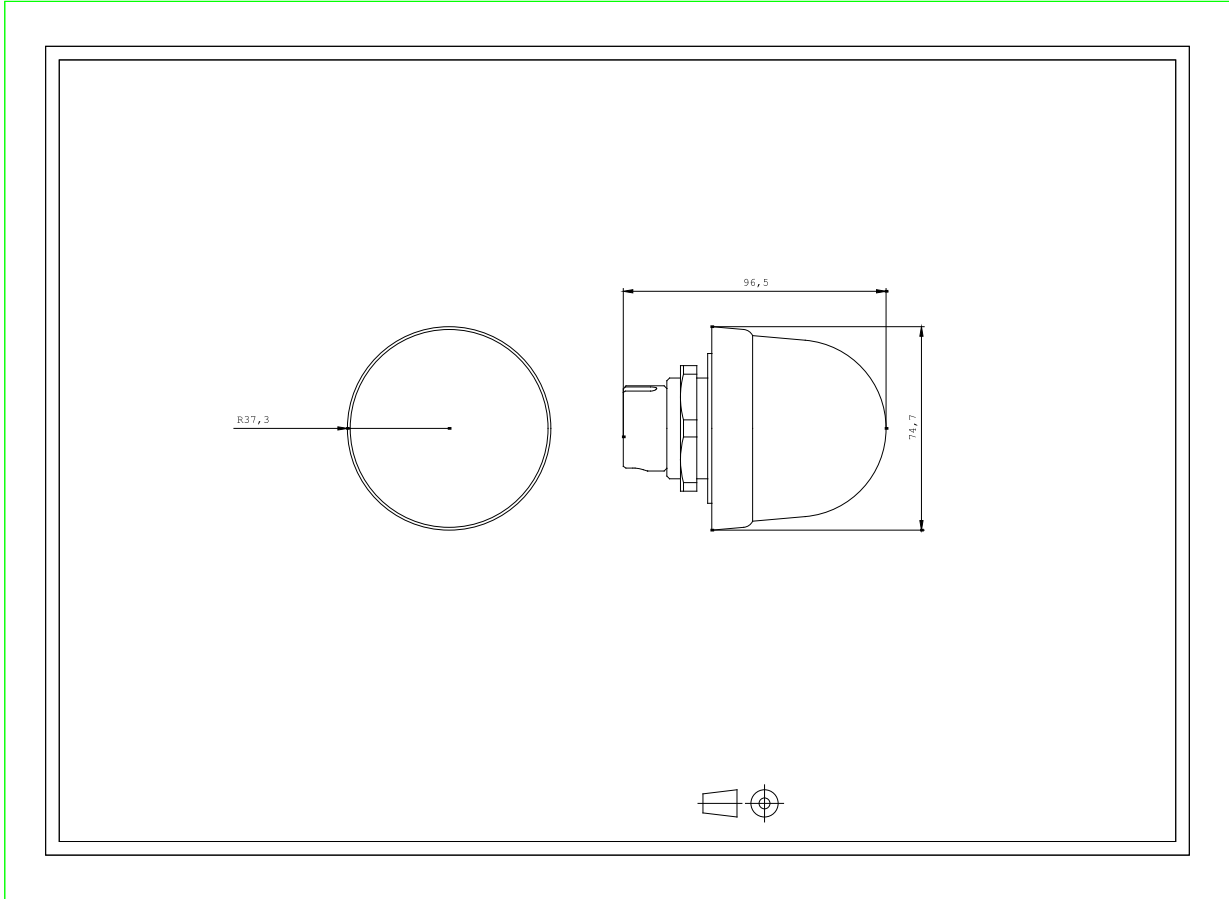

last change:

Jan 23, 2013