

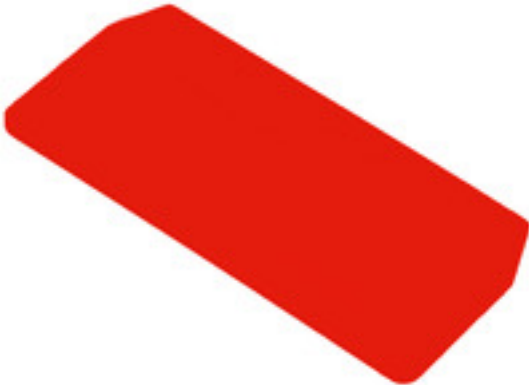
**ZAP/TW 2 RT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image****Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

**General ordering data**

Version	Z-series, End plate, Separation plate
Order No.	<a href="#">1683740000</a>
Type	ZAP/TW 2 RT
GTIN (EAN)	4008190477172
Qty.	50 pc(s).

Creation date March 24, 2021 7:35:08 PM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

**ZAP/TW 2 RT****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

Depth	30.5 mm	Depth (inches)	1.201 inch
Height	66 mm	Height (inches)	2.598 inch
Net weight	3 g	Width	2 mm
Width (inches)	0.079 inch		

**Temperatures**

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50
Continuous operating temp., max.	120		

**Material data**

Material	Wemid	Colour	red
UL 94 flammability rating	V-0		

**System specifications**

Version	End and intermediate plate
---------	----------------------------

**Additional technical data**

Installation advice	Direct mounting	Snap-on	Yes
---------------------	-----------------	---------	-----

**General**

Installation advice	Direct mounting
---------------------	-----------------

**Classifications**

ETIM 6.0	EC000886	ETIM 7.0	EC000886
ECLASS 9.0	27-14-11-92	ECLASS 9.1	27-14-11-33
ECLASS 10.0	27-14-11-92	ECLASS 11.0	27-14-11-92

**Approvals**

ROHS	Conform
------	---------

**Downloads**

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN, WSCAD, Zuken E3.S</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>