



PLUG-IN RELAY COMPACT UNIT AC 230,  
2 CO CONTACT LED MODULE RED STANDARD PLUG-IN  
SOCKET SCREW TERMINAL

**General technical details:**

**Supply voltage frequency / for auxiliary and control current circuit / rated value**

• minimum	Hz	50
• maximum	Hz	60

**Type of voltage**

AC

**Control supply voltage**

• at 50 Hz / at AC / rated value		
• minimum	V	230
• maximum	V	230
• at 60 Hz / at AC / rated value		
• minimum	V	230
• maximum	V	230

**Number of NC contacts**

• for auxiliary contacts	0
--------------------------	---

**Number of NO contacts**

• for auxiliary contacts	0
--------------------------	---

**Number of changeover contacts**

• for auxiliary contacts	2
--------------------------	---

**Operating current / of the auxiliary contacts**

• at AC-15	
------------	--

• at 230 V	A	2.5
<b>Design of the switching function</b>		changeover switch
• guided		No
<b>Switching behaviour</b>		monostable

#### Mechanical design:

<b>Design of the electrical connection</b>		screw-type terminals
<b>Design of the relay operating mechanism</b>		poled
<b>Product component / jumper socket</b>		Yes
<b>Width</b>	mm	15.5
<b>Height</b>	mm	71
<b>Depth</b>	mm	78

#### Certificates/approvals:

other

[Declaration of Conformity](#)

#### Further information:

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<http://www.siemens.com/industrial-controls/mall>

**CAX-Online-Generator**


<http://www.siemens.com/cax>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<http://support.automation.siemens.com/WWW/view/en/LZS:RT4A4T30/all>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**

[http://www.automation.siemens.com/bilddb/cax\\_en.aspx?mlfb=LZS:RT4A4T30](http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=LZS:RT4A4T30)

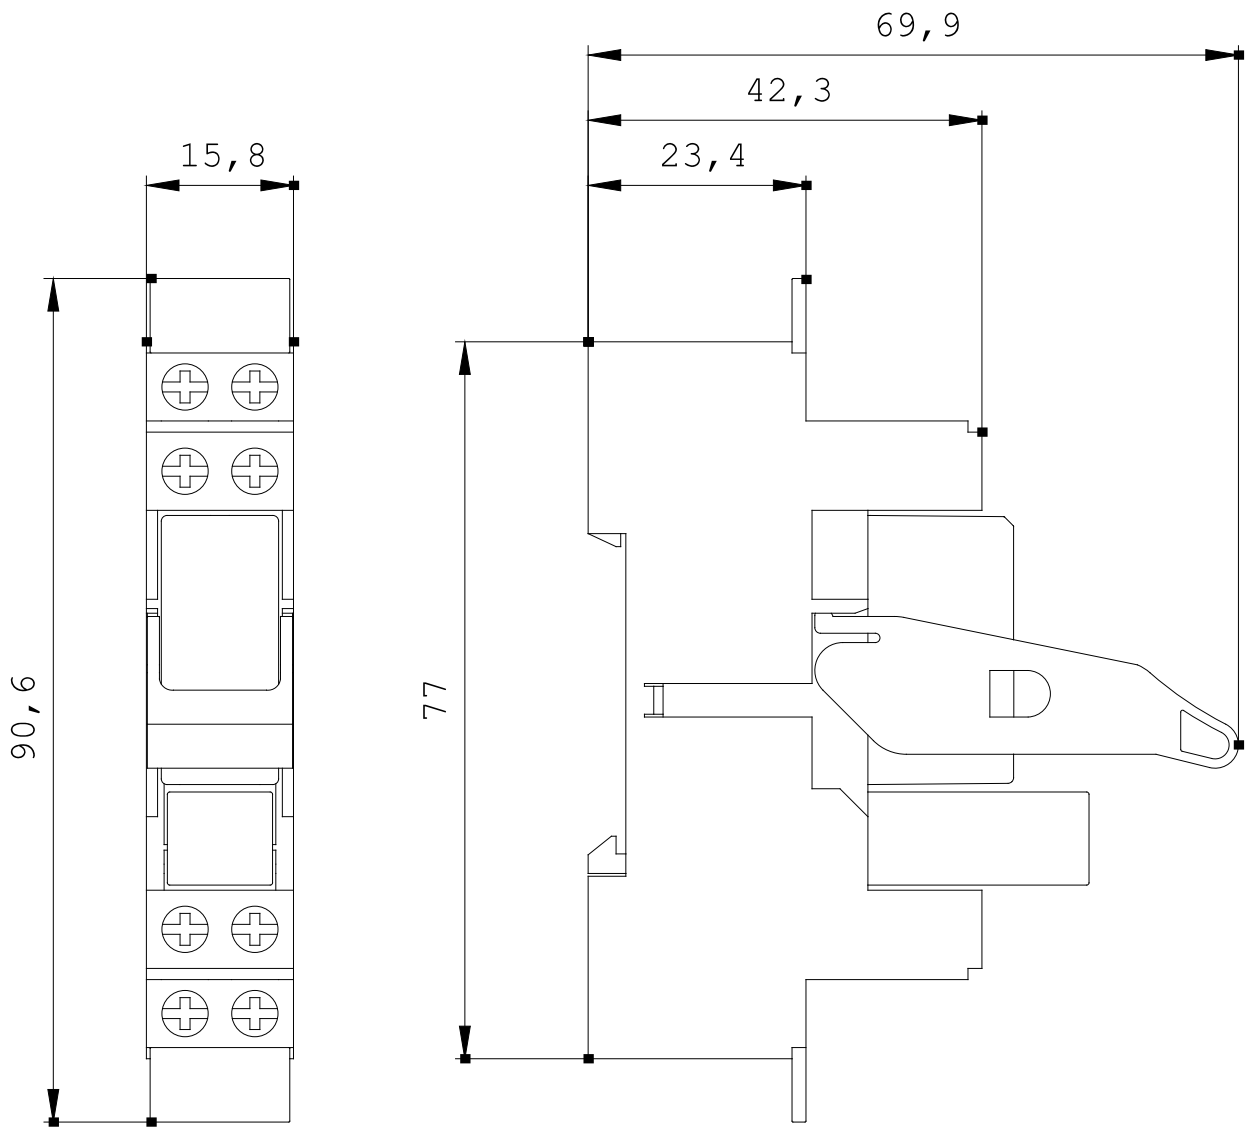

last change:

Jun 16, 2014