

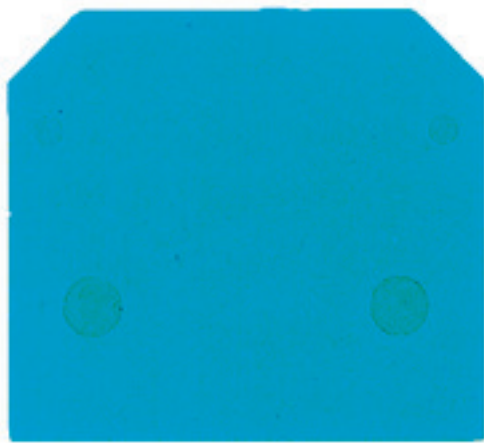
**AP SAK4-10 BL****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Product image****Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

**General ordering data**

Version	SAK Series, End plate, 1.5 mm, blue, Direct mounting
Order No.	<a href="#">0117980000</a>
Type	AP SAK4-10 BL
GTIN (EAN)	4008 19017 1087
Qty.	20 pc(s).

Creation date March 22, 2021 8:49:06 AM CET

Catalogue status 12.03.2021 / We reserve the right to make technical changes.

## AP SAK4-10 BL

Weidmüller Interface GmbH &amp; Co. KG

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

## Technical data

## Dimensions and weights

Depth	36 mm	Depth (inches)	1.417 inch
Height	40 mm	Height (inches)	1.575 inch
Net weight	2.4 g	Width	1.5 mm
Width (inches)	0.059 inch		

## Temperatures

Storage temperature	-25 °C...55 °C	Continuous operating temp., min.	-50 °C
Continuous operating temp., max.	100 °C		

## Material data

Material	PA 66	Colour	blue
UL 94 flammability rating	V-2		

## System specifications

Version	End plate
---------	-----------

## Additional technical data

Installation advice	Direct mounting	Snap-on	Yes
---------------------	-----------------	---------	-----

## Dimensions

TS 32 offset	38 mm
--------------	-------

## General

Installation advice	Direct mounting
---------------------	-----------------

## Classifications

ETIM 6.0	EC000886	ETIM 7.0	EC000886
ECLASS 9.1	27-14-11-33	ECLASS 10.0	27-14-11-33
ECLASS 11.0	27-14-11-33		

## Approvals

ROHS	Conform
------	---------

## Downloads

Engineering Data	<a href="#">STEP</a>
Engineering Data	<a href="#">EPLAN_WSCAD</a>
User Documentation	<a href="#">StorageConditionsTerminalBlocks</a>